

Article No. : 6SL3210-1KE21-3AF1



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data		Inputs / outputs	
Input		Standard digital inputs	
Number of phases		Number	6
Line voltage		Switching level: 0 → 1	11 V
Line frequency		Switching level: 1 → 0	5 V
Rated current (LO)		Max. inrush current	15 mA
Rated current (HO)		Fail-safe digital inputs	
Number of phases		Number	1
Rated voltage		Digital outputs	
Rated power (LO)		Number as relay changeover contact	1
Rated power (HO)		Output (resistive load)	DC 30 V, 0.5 A
Rated current (LO)		Number as transistor	1
Rated current (HO)		Output (resistive load)	DC 30 V, 0.5 A
Rated current (IN)		Analog / digital inputs	
Max. output current		Number	1 (Differential input)
Pulse frequency		Resolution	10 bit
Output frequency for vector control		Switching threshold as digital input	
Output frequency for V/f control		0 → 1	4 V
Overload capability		1 → 0	1.6 V
Low Overload (LO)		Analog outputs	
150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time		Number	1 (Non-isolated output)
High Overload (HO)		PTC/ KTY interface	
200% base load current IH for 3 s, followed by 150% base load current IH for 57 s in a 300 s cycle time		1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy ±5 °C	
General tech. specifications			
Power factor λ		Closed-loop control techniques	
0.70 ... 0.85		V/f linear / square-law / parameterizable	
Offset factor cos φ		Yes	
0.95		V/f with flux current control (FCC)	
Efficiency η		Yes	
0.97		V/f ECO linear / square-law	
Sound pressure level (1m)		Yes	
63 dB		Sensorless vector control	
Power loss		Yes	
173.0 W		Vector control, with sensor	
Filter class (integrated)		No	
Class A		Encoderless torque control	
Communication			
Communication		No	
PROFINET, EtherNet/IP		Torque control, with encoder	

Article No. : 6SL3210-1KE21-3AF1

Ambient conditions

Cooling	Air cooling using an integrated fan
Cooling air requirement	0.009 m ³ /s (0.318 ft ³ /s)
Installation altitude	1,000 m (3,280.84 ft)

Ambient temperature

Operation	-10 ... 40 °C (14 ... 104 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-25 ... 55 °C (-13 ... 131 °F)

Relative humidity

Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible
----------------	--

Connections

Signal cable

Conductor cross-section	0.15 ... 1.50 mm ² (AWG 24 ... AWG 16)
-------------------------	--

Line side

Version	Plug-in screw terminals
Conductor cross-section	4.00 ... 6.00 mm ² (AWG 12 ... AWG 10)

Motor end

Version	Plug-in screw terminals
Conductor cross-section	4.00 ... 6.00 mm ² (AWG 12 ... AWG 10)

DC link (for braking resistor)

Version	Plug-in screw terminals
Conductor cross-section	4.00 ... 6.00 mm ² (AWG 12 ... AWG 10)
Line length, max.	15 m (49.21 ft)
PE connection	On housing with M4 screw

Max. motor cable length

Shielded	50 m (164.04 ft)
Unshielded	100 m (328.08 ft)

Mechanical data

Degree of protection	IP20 / UL open type
----------------------	---------------------

Frame size	FSB
------------	-----

Net weight	2.30 kg (5.07 lb)
------------	-------------------

Dimensions

Width	100 mm (3.94 in)
Height	196 mm (7.72 in)
Depth	203 mm (8.19 in)

Standards


Compliance with standards	CE, cUL, UL, KC, EAC, C-Tick (RCM)
---------------------------	------------------------------------

CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC
------------	---

Converter losses to IEC61800-9-2*

Efficiency class	IE2
------------------	-----

Comparison with the reference converter (90% / 100%)	34.2 %
--	--------

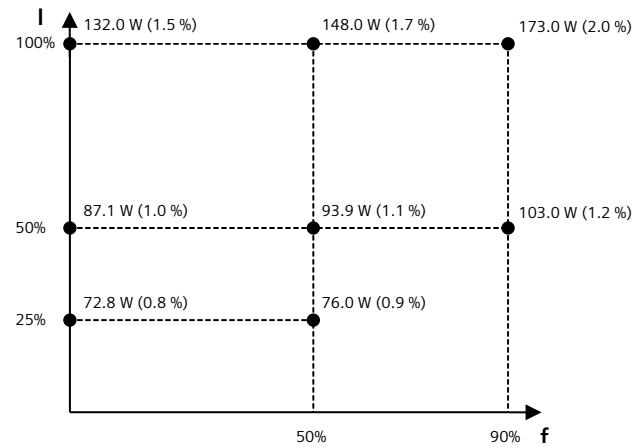

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

¹⁾The output current and HP ratings are valid for the voltage range 440V-480V