





Dial Gauge, Lug Back, ISO Type
Item number: 1960A

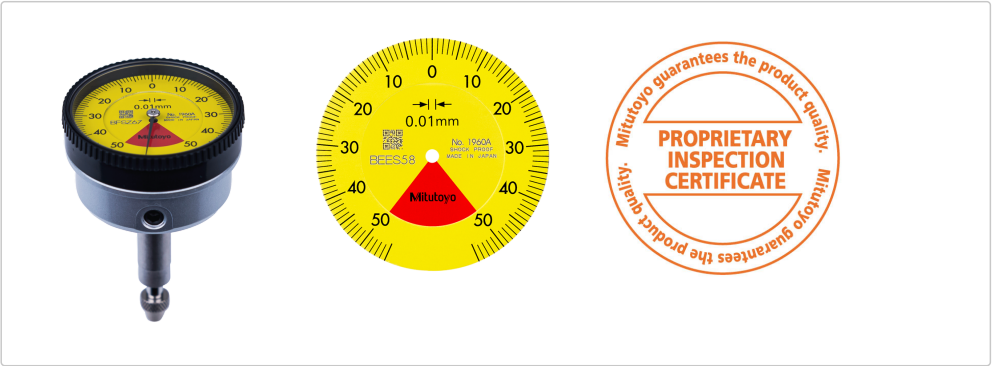

Images

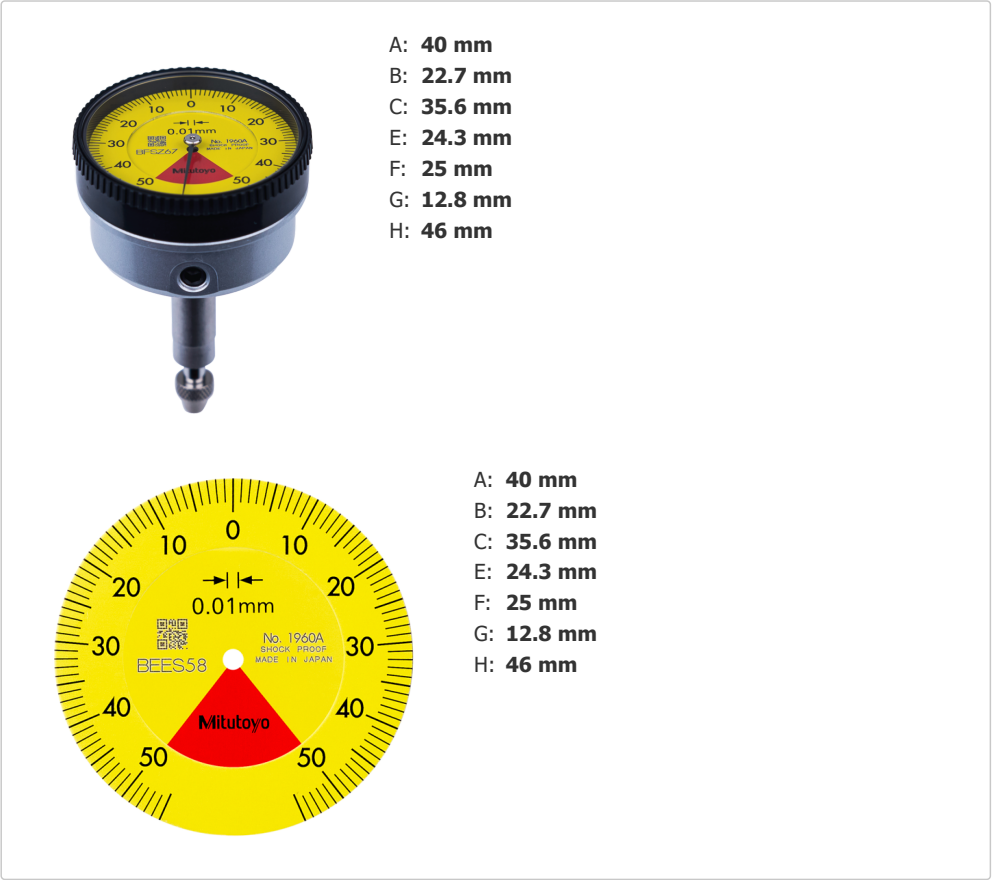

Description

This is a back plunger, dial indicator with bezel $\varnothing$ 40 mm. It offers you the following benefits:


- It is ideal for use in applications where space is limited.

Features

Digital/Analog:	Analog
Inch-Metric:	Metric
Functions:	ISO type
Range:	1 mm (plunger stroke: 4 mm)
Range per rev.:	1.27 mm
Graduation:	0.01 mm

Graduation:	0.01
Scale:	0-50-0
Measuring force:	0,4-1,4
MPE any 1/10 revolution:	7 µm
MPE measuring range:	15 µm
H MPE (Hysteresis):	3.5 µm
R MPE (Repeatability):	3 µm
Stem:	8 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm
Balanced dial:	Yes
Mass:	80 g
One revolution:	Yes
Shockproof:	Yes
fu:	3 µm

Dimensions

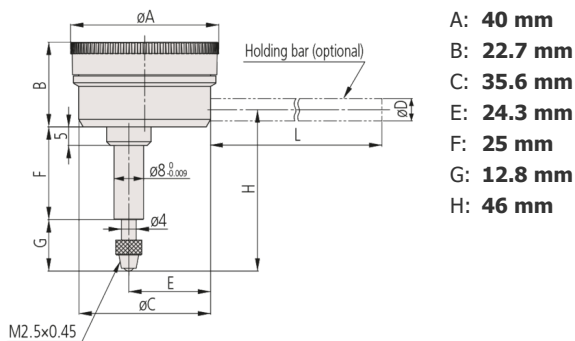

A: **40 mm**
B: **22.7 mm**
C: **35.6 mm**
E: **24.3 mm**
F: **25 mm**
G: **12.8 mm**
H: **46 mm**

Accessories

Optional accessories:



Limit Hands (Green) 2 pcs.
Dial Indicator Series 1, Test Indicator
21AAB363
Price on application



Holding Bar for Back Plunger Indicator
Ø6mm, 42mm Length
21AAA166
Suggested retail price: **10.00 €***



Holding Bar for Back Plunger Indicator
Ø6mm, 81mm Length
136567
Suggested retail price: **11.00 €***



Holding Bar for Back Plunger Indicator
Ø6,35mm, 81mm Length
124625
Suggested retail price: **11.00 €***



Holding Bar for Back Plunger Indicator
Ø6,35mm, 42mm Length
21AAA167
Suggested retail price: **10.00 €***



Holding Bar for Back Plunger Indicator
Ø8mm, 42mm Length
21AAA168

Suggested retail price: **10.00 €***



Holding Bar for Back Plunger Indicator
Ø8mm, 81mm Length
136568

Suggested retail price: **12.00 €***

Spare parts

Consumable spares:



Contact Element Ball Point, M2,5x0,45
7,3mm Length, Carbide, Metric
901312