

Digital Caliper ABS Digimatic Caliper

Catalog No. E12021




New-series Digimatic calipers born from Mitutoyo's technologies accumulated for 30 years since development of digital calipers
Equipped with the **electromagnetic induction type absolute encoder** applied for ABS coolant-proof calipers

- Patent registered (in Japan, USA, China, Germany, UK, France, Switzerland and India)
- Design patent pending (in Japan, USA, EU and China)


New ABS Digimatic Caliper CD-AX/APX Series

A new series of cost-effective standard Digimatic caliper born of Mitutoyo's ground-breaking encoder technologies developed over the last **30** years. Now equipped with the same AOS (Advanced Onsite Encoder) induction type encoder used in top-of-the-line **ABS coolant-proof calipers**.

Thanks to the adoption of the **electromagnetic induction type ABS encoder**, this caliper can be used without concern for **contamination on the scale face during measurement**.

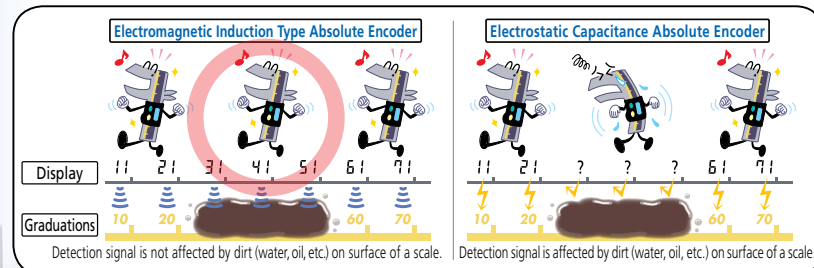

The quality of the slider working surface has improved with the latest machining technology.
Ra:0.071μm
Longitudinal direction


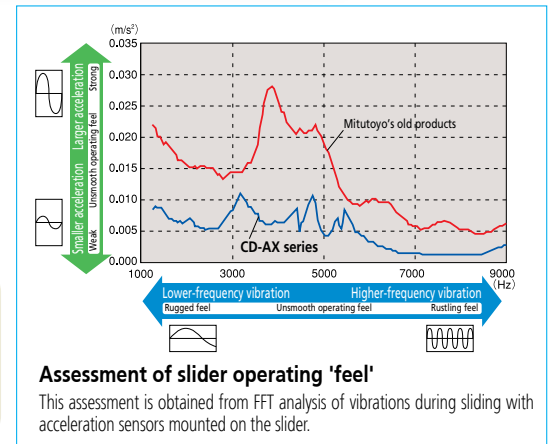


The slider provides **smooth, stable and comfortable** operation.



Font height: **9mm**
Alleviation of fatigue with the high-contrast LCD

The ABS (absolute) scale **requires no origin setting** after power-on and **also has no limit to response speed**.

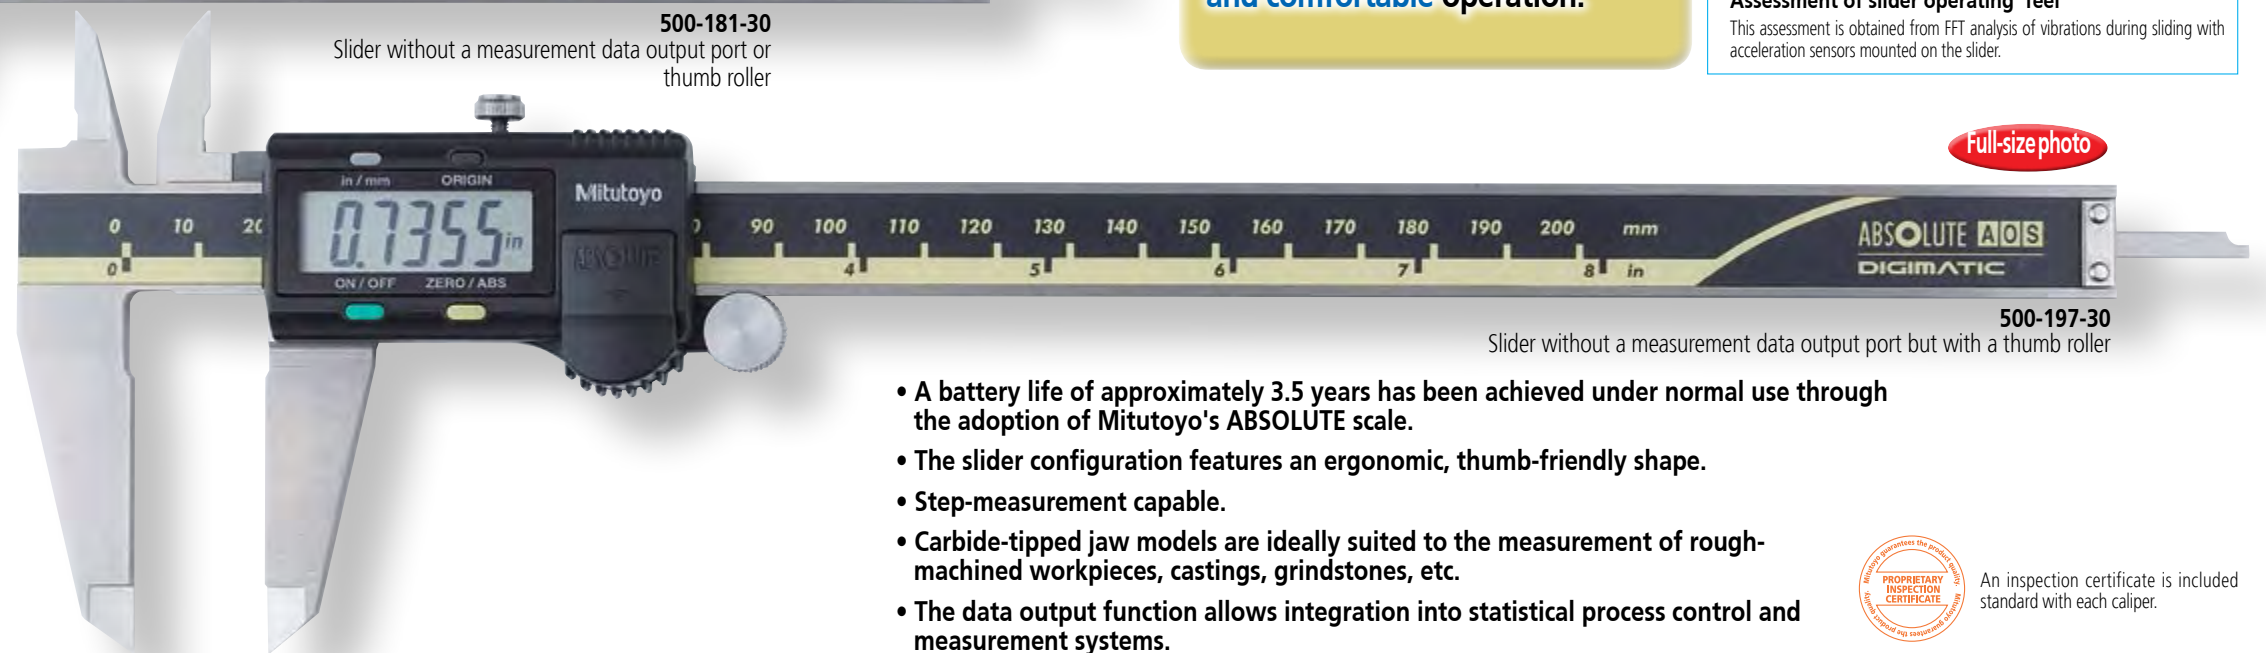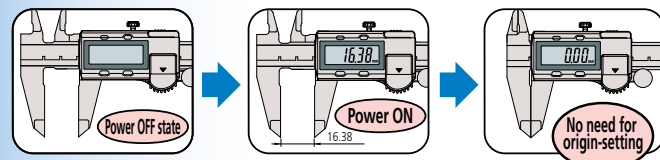

- A battery life of approximately 3.5 years has been achieved under normal use through the adoption of Mitutoyo's ABSOLUTE scale.
- The slider configuration features an ergonomic, thumb-friendly shape.
- Step-measurement capable.
- Carbide-tipped jaw models are ideally suited to the measurement of rough-machined workpieces, castings, grindstones, etc.
- The data output function allows integration into statistical process control and measurement systems.




An inspection certificate is included standard with each caliper.

ABSOLUTE™

Mitutoyo

Evolution of Mitutoyo's digital caliper

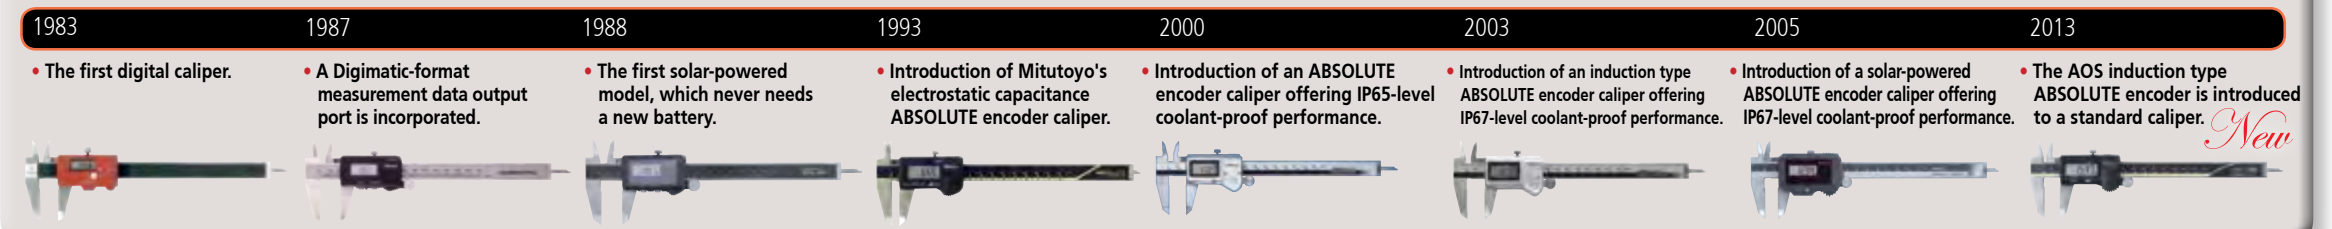

Common Specifications

- Resolution: 0.01mm
- Repeatability: 0.01mm
(Quantizing error excluded)
- Power supply: Button-type silver oxide battery SR44 (No. 938882), 1 piece supplied as standard (The standard supplied battery is for the monitor.)
- Battery life: Approx. 3.5 years under normal use
- Maximum response speed: Unlimited

Functions

- ABS (absolute) measurement function:**
Enables absolute-mode measurement to be started without any zero-setting after switch-on. The absolute origin position can be set, or reset, with the ORIGIN switch at any time.
- INC (incremental) measurement function:**
Enables the display value to be set to zero, temporarily, at the current slider position to enable easy incremental-mode measurement.

Low battery alarm:

Indicates (with a 'B' symbol in the display) that the battery needs replacing. This allows timely battery replacement before the caliper becomes unusable.

External output function:

Allows measurement data to be exported using the optional data cable.


Hold function:

Allows a display value to be held using the optional Data Hold unit. (This function cannot be used along with the external output function.)

SPECIFICATIONS

Metric							
Order No.	Range	Accuracy	Mass	Measurement data output port	Thumb roller	Remarks	
500-150-30	0-100mm	±0.02mm	143 g			Depth bar ø1.9mm rod	
500-180-30				—	—		
500-151-30							
500-154-30	0-150mm		168 g			—	
500-155-30				Carbide-tipped jaws for outside measurement			
500-158-30				Carbide-tipped jaws for outside and inside measurement			
				Depth bar ø1.9mm rod			
500-181-30	0-200mm		198 g	—	—	—	
500-152-30				—	—	—	
500-156-30				Carbide-tipped jaws for outside measurement			
500-157-30				Carbide-tipped jaws for outside and inside measurement			
500-182-30				—			
				—			
Inch							
Order No.	Range	Accuracy	Mass	Measurement data output port	Thumb roller	Remarks	
500-170-30	0-4"	±0.001"	143 g			Depth bar ø3/40" rod	
500-195-30				—			
500-171-30							
500-174-30	0-6"		168 g			—	
500-175-30				Carbide-tipped jaws for outside measurement			
500-178-30				Carbide-tipped jaws for outside and inside measurement			
				Depth bar ø3/40" rod			
500-196-30	0-8"		198 g	—		—	—
500-159-30				Carbide-tipped jaws for outside measurement			
500-160-30				Carbide-tipped jaws for outside and inside measurement			
500-172-30				—			
500-176-30				Carbide-tipped jaws for outside measurement			
500-177-30				Carbide-tipped jaws for outside and inside measurement			
500-197-30				—			
500-163-30				Carbide-tipped jaws for outside measurement			
500-164-30		Carbide-tipped jaws for outside and inside measurement					

External View/Dimensions Chart

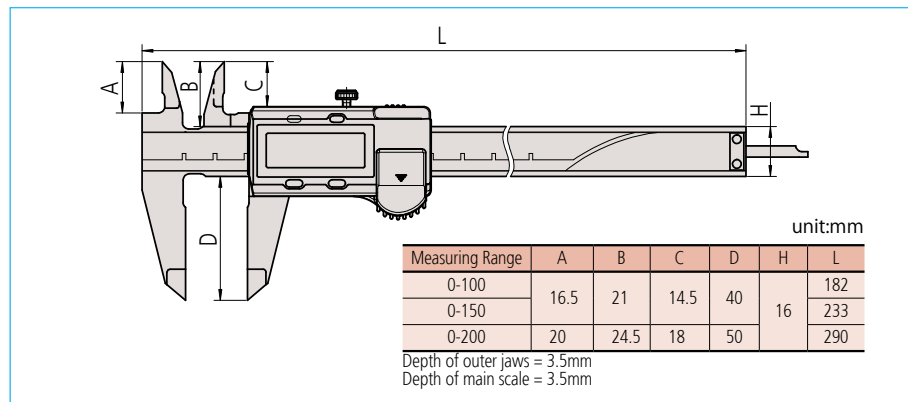

Export permission by the Japanese government may be required for exporting our products according to the Foreign Exchange and Foreign Trade Law. Please consult our sales office near you before you export our products or you offer technical information to a nonresident.

Coordinate Measuring Machines

Vision Measuring Systems

Form Measurement

Optical Measuring

Sensor Systems

Test Equipment and Seismometers

Digital Scale and DRO Systems


Small Tool Instruments and Data Management

Optional Accessories

These accessories are available only for those models with the measurement data output function.

Data Hold unit

Order No.959143

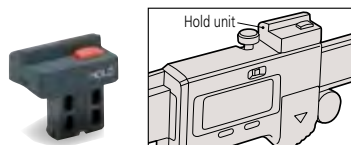

Connecting cable

Used for input tool DP-1VR or MUX-10F.

1m cable: Order No.959149

2m cable: Order No.959150



USB direct input tool

USB-ITN-C (2m): Order No.06ADV380C

U-WAVE-T dedicated connecting cable

Cable for standard use: Order No.02AZD790C

Cable for foot switch: Order No.02AZE140C

Note: All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this pamphlet, as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs, dimensions and weights. The stated accuracy, similar to design tolerances, does not apply to all situations of the products shown, valid at the time of printing. Only variations authorized by our company.

Mitutoyo