Functions	Series 571
ORIGIN (ABS-Zero)	<b>(a)</b>
ZERO/ABS	<b>(4)</b>
ON/OFF	<b>(a)</b>
Low voltage alarm	<b>(a)</b>
Data output	<b>(a)</b>

#### **Specifications**


Accuracy	Refer to the list of specifications (excluding quantizing error)
Digital step	0,01 mm
Max. response speed	Unlimited
Repeatability	0,01 mm
Battery life	approx. 18000 hours (150/200 mm ) approx. 20000 hours (>200 mm)
Display	LCD; character height 9 mm (150/200/300 mm), 10 mm (>300 mm)
Delivered	In a box including 1 battery

#### **Optional accessories**

Description
Digimatic Cable, Straight, Data Button, 1m
Digimatic Cable, Straight, Data Button, 2m
U-WAVE T Connection Cable C, Straight, with Data Button
USB Input Tool Direct (Digimatic USB), Straight, with Data Button
Data Hold Unit
Extension Base, Depth Gauge, 180mm width for up to 300mm range
Extension Base, Depth Gauge, 260mm width for up to 300mm range
Extension Base, Depth Gauge, 320mm width for up to 300mm range

#### Consumable spares

1	No.	Description
	938882	Battery SR44 1.5V

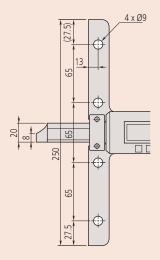

> 300 mm range

# **ABSOLUTE Digimatic Depth Gauge**

#### Series 571

This is a standard model depth gauge that lets you take accurate measurements. It offers you the following benefits:

- ABSOLUTE System gives you reliable measurements.
- Its base and measuring faces are hardened and micro-lapped for robustness.
- Large character height of 9mm makes measurements easy to read.
- Exceptional battery life.




571-201-30

#### Metric

No.	Range [mm]	Accuracy	L [mm]	Base (W x T)	Mass [g]	
571-201-30	0-150	±0,02 mm	239	100 x 6 mm	207	
571-202-30	0-200	±0,02 mm	289	100 x 6 mm	227	
571-203-20	-203-20 0-300 ±0,03 mm		403	100 x 6 mm	257	
571-204-10	<b>204-10</b> 0-450 ±0,05 m		635	250 x 10 mm	1270	
571-205-10	0-600	±0,05 mm	785	250 x 10 mm	1400	
571-206-10	0-750	±0,06 mm	935	250 x 10 mm	1530	
571-207-10	0-1000	±0,07 mm	1200	250 x 10 mm	1760	
1						



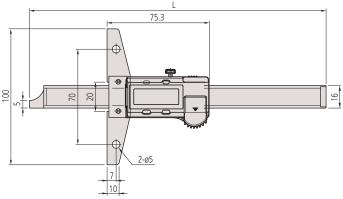

Up to 300 mm range



**ABSOLUTE®** 

### **ABSOLUTE Digimatic Depth Gauge**

#### Series 571

This depth gauge is IP67 coolant proof and offers you the following

- ABSOLUTE System gives you reliable measurements.
- Its base and measuring faces are hardened and micro-lapped for ro-
- It has excellent resistance against water and dust (IP67 protection level) enabling you to use it in machining situations that include splashing coolant fluid.
- Extremely resistant to both coolants and lubricants.





		/
(1	P)	67

Functions	Series 571
ORIGIN (ABS-Zero)	<b>(a)</b>
Auto Power OFF	<b>()</b>
after 20 min. non use	
Low voltage alarm	<b>(</b>
Data output	<b>()</b>

_									
•	n	Δ	cı	tı	ca	ŤΙ	n	n	
•	μ	c	u	ш	Cu	u	v		

Accuracy	Refer to the list of specifications (excluding quantizing error)
Digital step	0,01 mm
Max. response speed	Unlimited
Repeatability	0,01 mm
Battery life	approx. 5 years (150, 200 mm) 5000 hours (300 mm)
Display	LCD, Character Height 9 mm (150, 200 mm) 10,2 mm (300 mm)
Delivered	In a box including 1 battery

#### **Optional accessories**

'							
No.	Description						
05CZA624	Digimatic Cable with Data Button IP Type, 1m, Caliper Type						
05CZA625	Digimatic Cable with Data Button IP Type, 2m, Caliper Type						
02AZD790A	U-WAVE T Connection Cable A, with Data Button IP Caliper Type						
06ADV380A	USB Input Tool Direct (Digimatic USB), with Data Button IP Caliper Type						
900370	Extension Base, Depth Gauge, 180mm width for up to 300mm range						
900371	Extension Base, Depth Gauge, 260mm width for up to 300mm range						
900372	Extension Base, Depth Gauge, 320mm width for up to 300mm range						

#### Consumable spares

Interchangeable base  Bore depth gauges  Washer  Screw

Description 938882 Battery SR44 1.5V


Mounting the interchangeable base

	0																
ABSOLUTE COOLANY PROOF (Sto		MEdoyo 45,48,	50 60	70	80	90	100	110	120	130	340	150	160	170	180	190 1 mm	200
	0																


571-252-20

#### Metric

No.	Range [mm]	Accuracy	L [mm]	Base (W x T)	Mass [g]
571-251-20	0-150	±0,02 mm	237	100x 6 mm	199
571-252-20	0-200	±0,02 mm	287	100 x 6 mm	219
571-253-10	0-300	±0,03 mm	404	100 x 6,3 mm	357

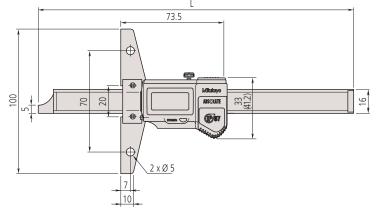

Range: 0-150 mm, 0-200 mm

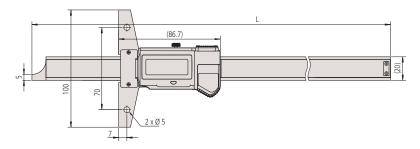

Range: 0-300 mm



# Functions ORIGIN (ABS-Zero) OFFSET Auto Power OFF after 20 min. non use Low voltage alarm Data output

#### **Specifications**


Accuracy	±0,03 mm (excluding quantizing error)
Digital step	0,01 mm
Max. response speed	Unlimited
Repeatability	0,01 mm
Battery life	approx. 5 years
Display	LCD, Character Height 9 mm
Delivered	In a case including 1 battery

#### **Optional accessories**

-			
No.	Description		
05CZA624	Digimatic Cable with Data Button IP		
	Type, 1m, Caliper Type		
05CZA625	Digimatic Cable with Data Button IP		
	Type, 2m, Caliper Type		
02AZD790A	U-WAVE T Connection Cable A, with		
	Data Button IP Caliper Type		
06ADV380A	USB Input Tool Direct (Digimatic USB),		
	with Data Button IP Caliper Type		
900370	Extension Base, Depth Gauge, 180mm		
	width for up to 300mm range		
900371	Extension Base, Depth Gauge, 260mm		
	width for up to 300mm range		
900372	Extension Base, Depth Gauge, 320mm		
	width for up to 300mm range		

#### Consumable spares

No.	Description	
938882	Battery SR44 1.5V	



# ABSOLUTE Digimatic Depth Gauge IP67 Hook/Pin Type

#### Series 571

 Direct reading for either measuring surface is obtained by pressing the OFFSET function, which compensates for the 10 mm width of the hook.






571-255-20



571-302-20

Metric	Hook Ty	rpe			
No.	Depth range	Hook range	Base (W x T)	L [mm]	Mass [g]
571-254-20	10,1-160 mm	0-150 mm	100 x 6 mm	247	216
571-255-20	10,1-210 mm	0-200 mm	100 x 6 mm	297	236

Metric			Pin Type			
	No.	Range [mm]	Base (W x T)	L [mm]	Mass [g]	
	571-301-20	0-150	100 x 6 mm	237	207	
	571-302-20	0-200	100 x 6 mm	287	227	

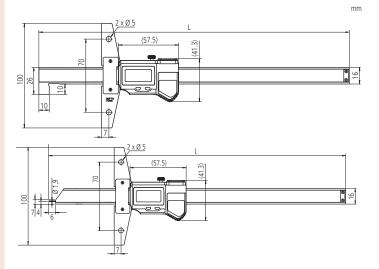



Functions	Series 571
ORIGIN (ABS-Zero)	<b>(</b>
Auto Power OFF	<b>(4)</b>
after 20 min. non use	
Low voltage alarm	<b>(a)</b>
Data output	<b>()</b>

#### Specifications

Accuracy	Refer to the list of specifications (excluding quantizing error)	
Digital step	0,01 mm	
Max. response speed	unlimited	
Repeatability	0,01 mm	
Battery life	approx. 5 years	
Display	LCD, Character height 9 mm	
Delivered	Including 1 battery	

#### **Optional accessories**

No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2m, Caliper Type
02AZD790A	U-WAVE T Connection Cable A, with Data Button IP Caliper Type
06ADV380A	USB Input Tool Direct (Digimatic USB), with Data Button IP Caliper Type

#### Consumable spares

NO.	Description	
938882	Battery SR44 1.5V	



# **Tyre Tread Depth Gauge**

#### Series 571


This is designed to measure tyre tread depth and offers you the following benefits:

- The ABSOLUTE feature of this gauge keeps track of the origin point (once set) for the entire life of the battery.
- It gives you SPC data output.









No.	Range [mm]	Accuracy	Mass [g]
571-100-20	0-25	±0,02 mm	160



# **Optional Accessories for Depth Gauge**

#### **Extension bases**


These optional extension bases can be fitted to depth gauge models up to 0-300mm range. They cannot be attached to 0-600mm or 0-1000mm range models.




900372

Metric					
No.	L [mm]	A [mm]	B [mm]	Number of holes	Mass [g]
900370	180	70	55	2	200
900371	260	35	60	5	270
900372	320	70	55	4	345





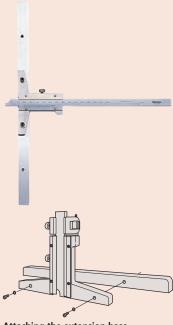

Attaching the extension base

