

Article No. :

6SL3225-0BE27-5AA1



Figure similar

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

Rated data	
<b>Input</b>	
Number of phases	3 AC
Line voltage	380 ... 480 V $\pm 10\%$
Line frequency	47 ... 63 Hz
Rated current (LO)	25.00 A
Rated current (HO)	19.00 A
<b>Output</b>	
Number of phases	3 AC
<b>Rated voltage</b>	<b>400V IEC</b> <b>480V NEC<sup>1)</sup></b>
Rated power (LO)	11.00 kW
Rated power (HO)	7.50 kW
Rated current (LO)	25.00 A
Rated current (HO)	19.00 A
Max. output current	38.00 A
Pulse frequency	4 kHz
Output frequency for vector control	0 ... 200 Hz
Output frequency for V/f control	0 ... 550 Hz
<b>Overload capability</b>	
Low Overload (LO)	1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s
High Overload (HO)	1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s
General tech. specifications	
Power factor $\lambda$	0.90
Offset factor $\cos \varphi$	0.95
Efficiency $\eta$	0.95
Sound pressure level (1m)	60 dB
Power loss	0.28 kW
Filter class (integrated)	Class A


Ambient conditions	
Cooling	Internal air cooling
Cooling air requirement	0.038 m <sup>3</sup> /s (1.342 ft <sup>3</sup> /s)
Installation altitude	1,000 m (3,280.84 ft)
<b>Ambient temperature</b>	
Operation LO	0 ... 40 °C (32 ... 104 °F)
Operation HO	0 ... 50 °C (32 ... 122 °F)
Transport	-25 ... 55 °C (-13 ... 131 °F)
Storage	-25 ... 55 °C (-13 ... 131 °F)
<b>Relative humidity</b>	
Max. operation	95 % RH, condensation not permitted
Connections	
<b>Line side</b>	
Version	screw-type terminal
Conductor cross-section	2.50 ... 10.00 mm <sup>2</sup> (AWG 14 ... AWG 8)
<b>Motor end</b>	
Version	Screw-type terminals
Conductor cross-section	2.50 ... 10.00 mm <sup>2</sup> (AWG 14 ... AWG 8)
<b>Max. motor cable length</b>	
Shielded	25 m (82.02 ft)
Unshielded	100 m (328.08 ft)
Mechanical data	
Degree of protection	IP20 / UL open type
Frame size	FSC
Net weight	7.50 kg (16.53 lb)
<b>Dimensions</b>	
Width	189 mm (7.44 in)
Height	334 mm (13.15 in)
Depth	185 mm (7.28 in)
Standards	
Compliance with standards	UL, cUL, CE, C-Tick (RCM)
CE marking	Low-voltage directive 2006/95/EC

Article No. : 6SL3225-0BE27-5AA1

### Converter losses to IEC61800-9-2\*

Efficiency class IE2

Comparison with the reference converter (90% / 100%) 48.07 %

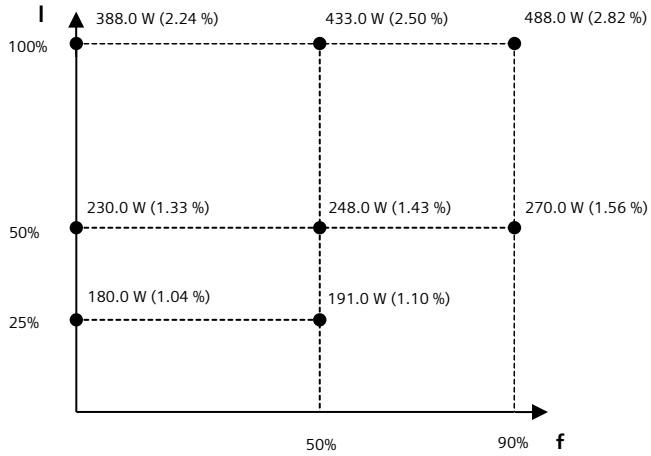

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*calculated values

<sup>1)</sup>The output current and HP ratings are valid for the voltage range 440V-480V