



Product designation  
Product type designation  
Motor type

Soft Starter  
ADXT  
Asynchronous  
three phase

### Electrical features

Supplies voltage	Type of system		Three phase
	Rated supply voltage	V	380...690VAC
	auxiliary supply voltage (Us)		24VAC/DC
	Rated frequency	Hz	50/60
Rated starter current Ie		A	139
Rated motor power	IEC ratings (T≤40°C)		
	400VAC	kW	110
	500VAC	KW	132
	UL ratings (T≤40°C)		
	380-415VAC	HP	125
	440-480VAC	HP	150
	550-600VAC	HP	200
Number of controlled phases		Nr.	3
Built-in bypass			Yes
Cooling System			Forced
Rated insulation voltage Ui		V	690

### Programming interface

Display	LCD graphic display
Programming with NFC technology	No
Optical port	No

### Startup and stop settings

Startup method	Constant current, current ramp, voltage ramp, adaptive control
Stop method	Voltage ramp, adaptive control, free-wheel stop, DC braking, soft stop with braking contactor

### Protections

Auxiliary supply protection	Voltage too low
Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, voltage out of limits

Motor protection	Overload, locked rotor, current asymmetry, current too low, power too low, overtemperature, starting too long
Starter protection	Overcurrent, overtemperature, phase shorted

Functions	
Built-in bypass	Yes
Built-in display and keypad	Yes
Languages	6
View measurements	Yes
Torque control	No
Adjustable current limit	Yes
Dynamic braking	Yes
Kick Start function	Yes
Motor overload electronic protection	Yes
Motor protection PTC input	Thermistor input
Protection against phase loss	Yes
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	Yes
Protection against low load	Yes
Programmable alarm	Yes
Digital inputs	4
Analog inputs	0
Digital outputs	3
Analog output	1
Optical port for programming	No
Event log	Yes
Motor hour counter	Yes
Startup counter	Yes
Clock calendar	Yes
Remote external keypad	Yes

Input and Output			
Digital inputs	Number of digital input	Nr.	4
	Digital input type		4 input with dry contact + 1 thermistor input
	Digital input functions		1x Start/Stop, 1x Reset and 2 Programmable
Digital outputs	Number of digital output	Nr.	3
	Digital output arrangement		2x 1NO + 1x C/O 1NO Line contactor + 1NO Programmable + 1C/O
	Digital output functions		1C/O Programmable

**Ambient conditions**

Temperature

Operating temperature

min	°C	-10
max	°C	+60°C (with current derating >40°C)

Storage temperature

min	°C	-25
max	°C	+60

Max altitude

m	1000 without derating
---	--------------------------

Relative humidity

%	<95%
---	------

Pollution degree

3
---

**Housing**

Mounting

Screw-fixing

IP degree of protection

IP00


Dimensions (W x H x D)

mm	216x495x244
----	-------------

Weight

Kg	12.7
----	------

**Dimensions**

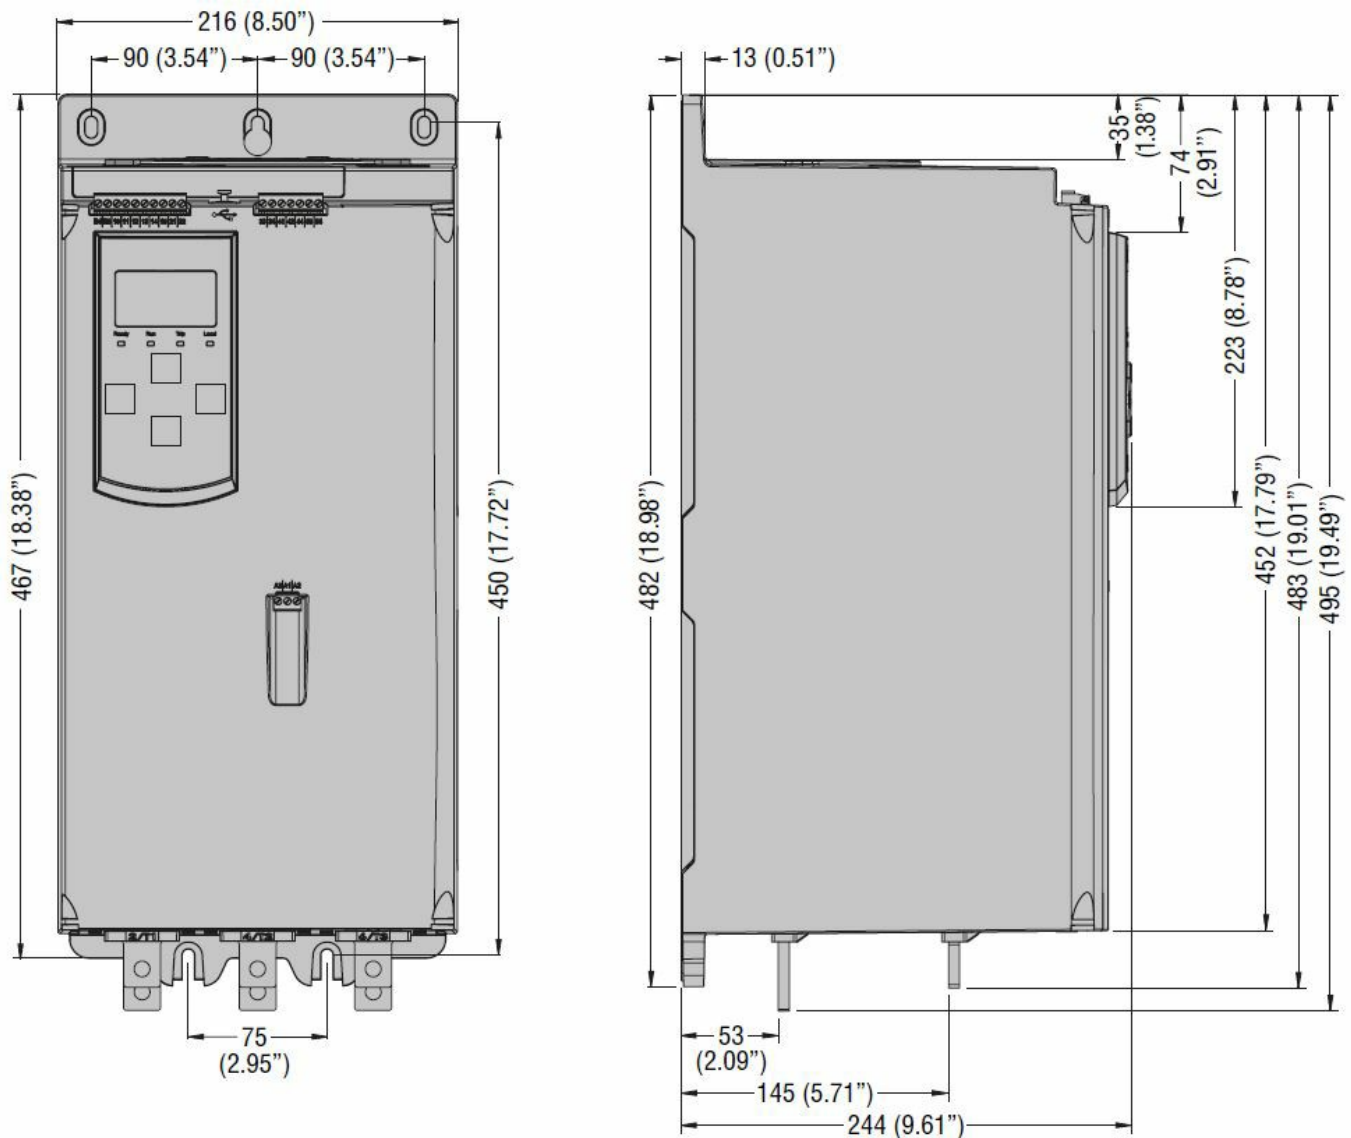

### Certifications and compliance

#### Compliance

CSA C22.2 n°60947-4-2

IEC/EN/BS 60947-4-2

UL 60947-4-2

#### Certificates

cULus

RCM

### ETIM classification

ETIM 8.0

EC000640 - Soft  
starter