



Product designation  
Product type designation  
Motor type

Soft Starter  
ADXT  
Asynchronous  
three phase

**Electrical features**

Supplies voltage

Type of system		Three phase
Rated supply voltage	V	380...690VAC
auxiliary supply voltage (Us)		110...120VAC / 220...240VAC
Rated frequency	Hz	50/60
Rated starter current Ie	A	187

Rated motor power

IEC ratings (T≤40°C)

400VAC	kW	160
500VAC	KW	200

UL ratings (T≤40°C)

380-415VAC	HP	150
440-480VAC	HP	200
550-600VAC	HP	250

Number of controlled phases

Nr. 3

Built-in bypass

Yes

Cooling System

Forced

Rated insulation voltage Ui

V 690

**Programming interface**

Display

LCD graphic  
display

Programming with NFC technology

No

Optical port

No

**Startup and stop settings**

Startup method

Constant current,  
current ramp,  
voltage ramp,  
adaptive control

Stop method

Voltage ramp,  
adaptive control,  
free-wheel stop,  
DC braking, soft  
stop with braking  
contactor

**Protections**

Auxiliary supply protection

Voltage too low

Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, voltage out of limits
Motor protection	Overload, locked rotor, current asymmetry, current too low, power too low, overtemperature, starting too long
Starter protection	Overcurrent, overtemperature, phase shorted

Functions	
Built-in bypass	Yes
Built-in display and keypad	Yes
Languages	6
View measurements	Yes
Torque control	No
Adjustable current limit	Yes
Dynamic braking	Yes
Kick Start function	Yes
Motor overload electronic protection	Yes
Motor protection PTC input	Thermistor input
Protection against phase loss	Yes
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	Yes
Protection against low load	Yes
Programmable alarm	Yes
Digital inputs	4
Analog inputs	0
Digital outputs	3
Analog output	1
Optical port for programming	No
Event log	Yes
Motor hour counter	Yes
Startup counter	Yes
Clock calendar	Yes
Remote external keypad	Yes

Input and Output			
Digital inputs	Number of digital input	Nr.	4
	Digital input type		4 input with dry contact + 1 thermistor input
	Digital input functions		1x Start/Stop, 1x Reset and 2 Programmable

Digital outputs	Number of digital output	Nr.	3
-----------------	--------------------------	-----	---

SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 187A

Digital output arrangement	2x 1NO + 1x C/O 1NO Line contactor + 1NO
Digital output functions	Programmable + 1C/O Programmable

**Ambient conditions**

Temperature

Operating temperature

min	°C	-10
max	°C	+60°C (with current derating >40°C)

Storage temperature

min	°C	-25
max	°C	+60

Max altitude

m	1000 without derating
---	--------------------------

Relative humidity

%	<95%
---	------

Pollution degree

3

**Housing**

Mounting

Screw-fixing

IP degree of protection

IP00


Dimensions (W x H x D)

mm	216x495x244
----	-------------

Weight

Kg	12.7
----	------

**Dimensions**

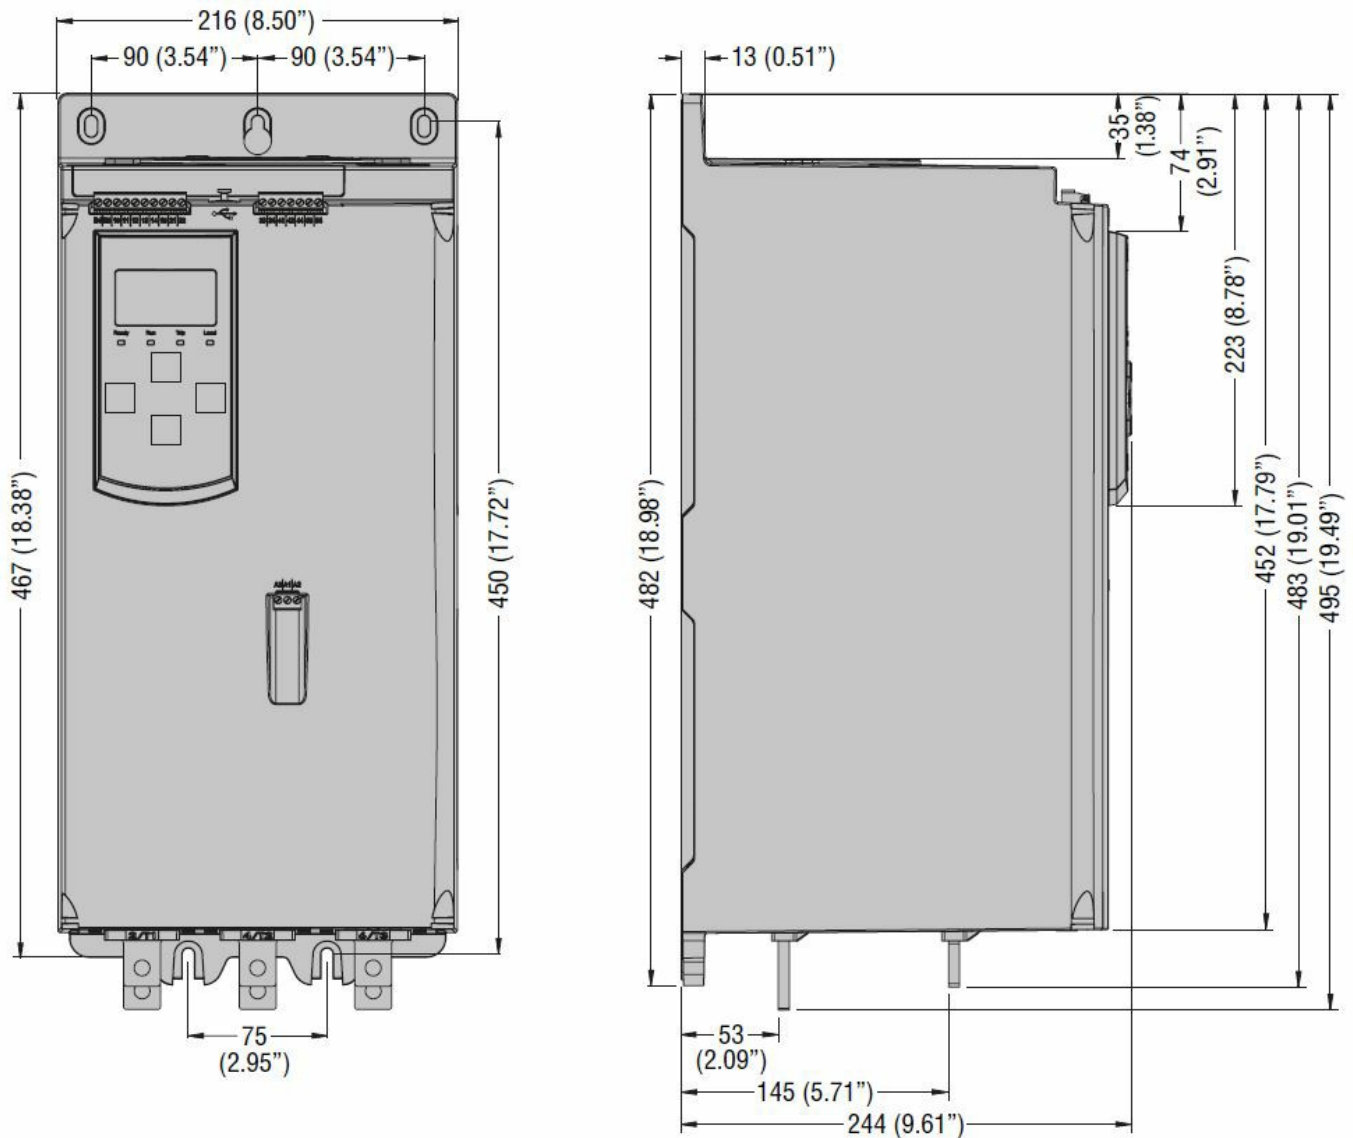

### Certifications and compliance

#### Compliance

CSA C22.2 n°60947-4-2

IEC/EN/BS 60947-4-2

UL 60947-4-2

#### Certificates

cULus

RCM

### ETIM classification

ETIM 8.0

EC000640 - Soft starter