



LOGIC ELEMENTS

LC* CARTRIDGE VALVES
ISO 7368 - DIN 24342

LP* COVERS


LCM* MONITORED LOGIC EL.

ND 16 - 25 - 32 - 40 - 50 - 63

p max 420 bar

Q max (see table of performances)

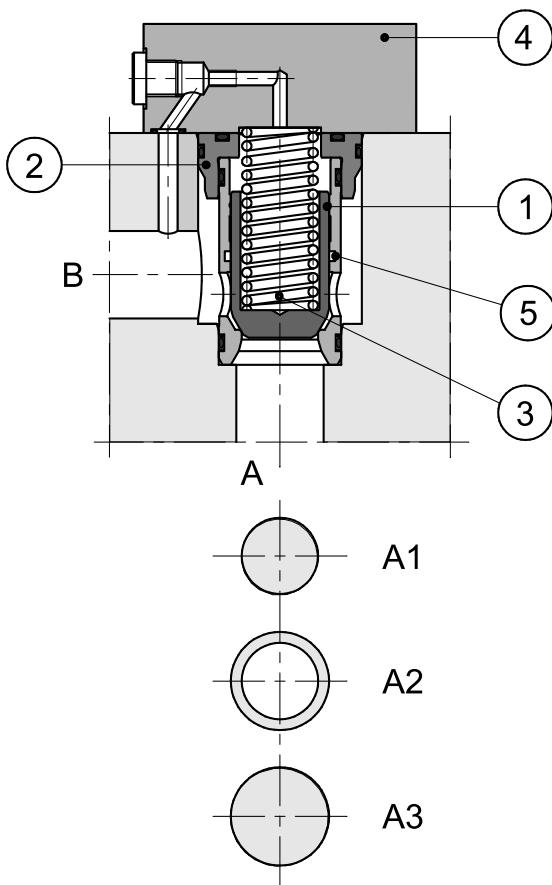OPERATING PRINCIPLE



— Logic elements are cartridge valves suitable for installation in blocks or manifolds. They are available in five different sizes: ND 16 - 25 - 32 - 40 - 50 - 63.

— They are designed to perform complex hydraulic circuits, using functional compact blocks, with high flow rates and low pressure drops.

— They are made of a cartridge valve with ISO 7368 / DIN 24342 cavity bore and a control cover (4). The cover includes the cartridge valves pilot lines; some versions are designed for the installation of ISO 4401-03 valves, to realise different control functions (see paragraph 8 for diagrams and function descriptions). A low leakage version, obtained inserting a seal into the seat no. 5, is also available.

— The cartridge valves are composed of a jacket (2), a poppet (1), and a closing spring (3). The poppet can either be standard (S) or with a damping nose (D), suitable for a smooth flow control during the valve opening and closing phases.

— Two types of cartridge valves are available:

- **Q** type: used for flow and directional control and as a check valve.

The areas involved are:

A1 - corresponding to the seat diameter area, considered as reference area = 1

A3 - corresponding to the jacket internal diameter area.

A2 - corresponding to the difference between A3 - A1

The area ratio A1/A3 is 1/1,66.

The valve opens when the pressure, acting either on area A1 (flow from A to B) or on area A2 (flow from B to A), is higher than the pressure acting on area A3 (added to the spring load value).






- **P** type: used for pressure control.

In this case the areas A1 and A3 are equivalent (area ratio 1:1) and the valve enables the flow direction from A to B only.

— **LCM*** are logic elements with spool position monitoring used for directional control, flow control, piloting and as check valve. They are certified by TÜV.

Available sizes are ND 16, 25, 32, 40 and 50.

1 - IDENTIFICATION CODE FOR CARTRIDGE VALVES

| Cartridge valve | | | | | | L C - I N / | LL = Low leakage version, with seal between C and B. Not available for QS0.5 and LC16-PS*. Omit if not required. |
|--|------------|------------|------------|------------|------------|---|--|
| Shutter type: (area ratio A1 / A3): QS = flow rate control (1:1,66) QD = flow rate control with damping nose (1:1,66) PS = pressure control (1:1) | | | | | | Seals: NBR seals for mineral oil 20 - for ND 16, 25, 32, 40 and 50 21 - for ND 63 (the overall and mounting dimensions remain unchanged from 20 to 29) | |
| | | | | | | Nominal cracking pressure on section A1: Verify the versions availability in the table below. Other cracking pressure values are available on request. 0.5 = 0.5 bar 1 = 1 bar 2 = 2 bar 4 = 4 bar | |
| AVAILABLE NOMINAL SIZES | | | | | | VERSIONS | SYMBOL |
| 16 ND16 | 25 ND25 | 32 ND32 | 40 ND40 | 50 ND50 | 63 ND63 | QS0.5 |  |
| x | x | x | x | x | | QS2 |  |
| x | x | x | x | x | x | QD4 |  |
| | | | | | x | PS1 |  |
| x | x | x | x | x | | PS2 |  |

2 - HYDRAULIC FLUIDS

Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals. For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department.

Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics.

The fluid must be preserved in its physical and chemical characteristics.

3 - TECHNICAL CHARACTERISTICS

(cartridge valve with control cover)

| | | |
|--|--|-----------|
| Max operating pressure LC cartridge valve | bar | 420 |
| Max operating pressure limit of covers type DP*, DPE*, DF1, DF2, LCM | bar | 350 |
| Max operating pressure with distributor installed on cover | See technical characteristics of the distributor | |
| Ambient temperature range | °C | -20 / +50 |
| Fluid temperature range | °C | -20 / +80 |
| Fluid viscosity range | cSt | 10 ÷ 400 |
| Fluid contamination degree | According to ISO 4406:1999 class 20/18/15 | |
| Recommended viscosity | cSt | 25 |

3.1 - Cartridge valves type Q performances

(flow control function)

| | | NOMINAL SIZE | | | | | |
|-------------------|--|-----------------|-------------------------------------|----------------------------------|------------------------------------|-----------------------------------|------------------------------------|
| | | 16 | 25 | 32 | 40 | 50 | 63 |
| Area A1 | cm ² | 1,54 | 3 | 6 | 8,76 | 14,8 | 24,6 |
| Area A2 | cm ² | 1 | 2 | 4 | 5,76 | 9,7 | 16,1 |
| Area A3 | cm ² | 2,54 | 4,9 | 10 | 14,3 | 24,3 | 40,7 |
| Version S: | opening stroke h | cm | 0,8 | 1 | 1,25 | 1,6 | 1,8 |
| | opening volume | cm ³ | 2,03 | 4,9 | 12,5 | 22,88 | 43,74 |
| | max recommended flow | l/min | 250 | 500 | 900 | 1300 | 2000 |
| Version D: | opening stroke h | cm | 0,8 | 1,15 | 1,5 | 1,8 | 2,2 |
| | opening volume | cm ³ | 2,03 | 5,63 | 15 | 25,74 | 53,46 |
| | max recommended flow | l/min | 200 | 450 | 800 | 1100 | 1700 |
| Cracking pressure | spring 0,5 A→B spring 2 spring 4 spring 0,5 B→A spring 2 spring 4 | bar | 0,5 2 4 0,9 3,1 6,15 | 0,5 2 4 1,1 3 5,9 | 0,5 2 4 0,7 3,1 5,4 | 0,5 2 4 0,76 3 5,9 | 0,5 2 4 0,8 3,2 5,9 |
| Mass | Kg | 0,25 | 0,5 | 1,1 | 1,9 | 3,9 | 7,8 |





3.2 - Cartridge valves type P performances

(pressure control function)


| | | NOMINAL SIZE | | | | | |
|---------------------------------|-----------------|--------------|-----|-----|------|------|------|
| | | 16 | 25 | 32 | 40 | 50 | 63 |
| Area A1 = Area A3 | cm ² | 2,54 | 4,9 | 10 | 14,4 | 24,3 | 40,7 |
| Version S: max recommended flow | l/min | 200 | 400 | 900 | 1000 | 1500 | 2500 |
| Cracking pressure | spring 1 | bar | - | - | - | - | 1 |
| | spring 2 | | 2 | 2 | 2 | 2 | - |
| Mass | Kg | 0,25 | 0,5 | 1,1 | 1,9 | 3,9 | 7,8 |

4 - CHARACTERISTIC CURVES

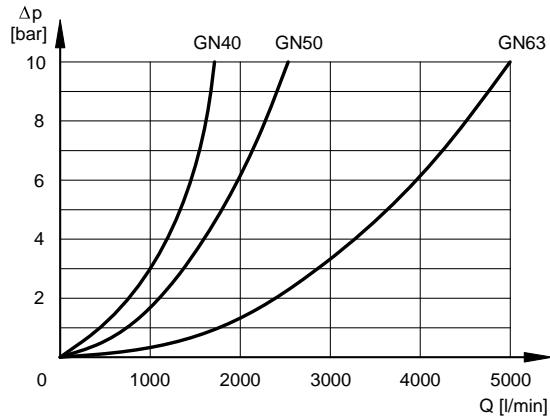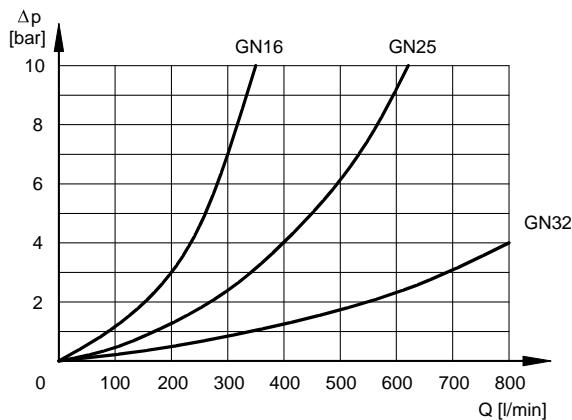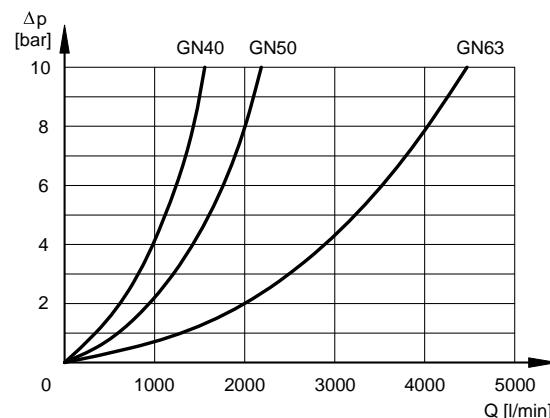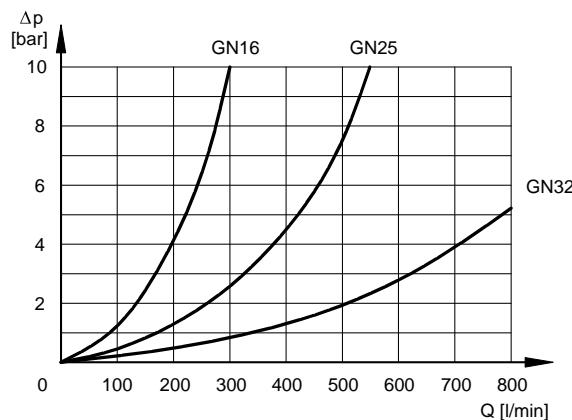(values obtained with viscosity 36 cSt at 50°C)


4.1 - LC*- QS flow control function and LC*-PS pressure control function**4.2 - Flow control function with damping nose LC*- QD**

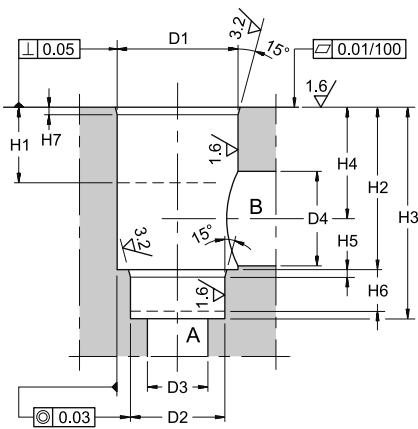5 - LC CARTRIDGE VALVES SEAT DIMENSIONS ACCORDING TO ISO 7368 / DIN 24342



| | LC CARTRIDGE VALVES NOMINAL SIZE | | | | | |
|---------------------------------|----------------------------------|------|-----|-----|------|------|
| | 16 | 25 | 32 | 40 | 50 | 63 |
| ØD1 ^{H7} | 32 | 45 | 60 | 75 | 90 | 120 |
| ØD2 ^{H7} | 25 | 34 | 45 | 55 | 68 | 90 |
| ØD3 max | 16 | 25 | 32 | 40 | 50 | 63 |
| ØD4 | 16 | 25 | 32 | 40 | 50 | 63 |
| ØD4 max | 25 | 32 | 40 | 50 | 63 | 80 |
| H1 min | 20 | 30 | 30 | 30 | 35 | 40 |
| H2 ± 0,1 | 43 | 58 | 70 | 87 | 100 | 130 |
| H3 + 0,1 0 | 56 | 72 | 85 | 105 | 122 | 155 |
| H4 referred to diameter ØD4 | 34 | 44 | 52 | 64 | 72 | 95 |
| H4 referred to diameter ØD4 max | 29,5 | 40,5 | 48 | 59 | 65,5 | 86,5 |
| H5 | 2 | 2,5 | 2,5 | 3 | 3 | 4 |
| H6 min | 11 | 12 | 13 | 15 | 17 | 20 |
| H7 | 2 | 2,5 | 2,5 | 3 | 4 | 4 |

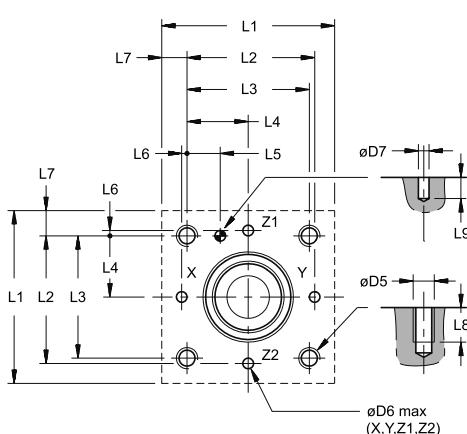6 - LP CONTROL COVERS INTERFACE DIMENSIONS ACCORDING TO ISO 7368 / DIN 24342



| | LP CONTROL COVERS NOMINAL SIZE | | | | | |
|--------------------|--------------------------------|------|-----|------|-----|-------|
| | 16 | 25 | 32 | 40 | 50 | 63 |
| ØD5 | M8 | M12 | M16 | M20 | M20 | M30 |
| ØD6 max | 4 | 6 | 8 | 10 | 10 | 12 |
| ØD7 ^{H13} | 4 | 6 | 6 | 6 | 8 | 8 |
| L1 | * | 85 | 102 | 125 | 140 | 180 |
| L2 ± 0,1 | 48 | 62 | 76 | 92,5 | 108 | 137,5 |
| L3 ± 0,1 | 46 | 58 | 70 | 85 | 100 | 125 |
| L4 ± 0,1 | 23 | 29 | 35 | 42,5 | 50 | 62,5 |
| L5 ± 0,1 | 12,5 | 13 | 18 | 19,5 | 20 | 24,5 |
| L6 ± 0,1 | 2 | 4 | 6 | 7,5 | 8 | 12,5 |
| L7 | * | 13,5 | 16 | 20 | 20 | 27,5 |
| L8 min | 15 | 20 | 28 | 35 | 35 | 52 |
| L9 min | 8 | 8 | 8 | 8 | 8 | 8 |

* = cover with special dimensions (see par. 10.2 ÷ 10.7)

7 - COVERS IDENTIFICATION CODE

| L P / N | | | | | | |
|-----------------------------|------------|------------|------------|------------|------------|---|
| Cartridge valve cover _____ | | | | | | Seals: NBR seals for mineral oil |
| | | | | | | 21 = DP* and DPE* covers, ND 16, 25 and 32 20 = all the others (the overall and mounting dimensions remain unchanged from 20 to 29) |
| AVAILABLE NOMINAL SIZES | | | | | | |
| 16 ND16 | 25 ND25 | 32 ND32 | 40 ND40 | 50 ND50 | 63 ND63 | COVER NAME |
| x | x | x | | | x | R |
| x | x | x | x | x | x | D |
| x | x | x | x | | | DZ |
| x | x | x | x | x | | DF1 |
| x | x | x | x | x | | DF2 |
| x | x | x | x | x | x | Q |
| x | x | x | x | x | x | DP* |
| x | x | x | x | x | x | DPE* |
| | | | | | | SYMBOL |
| | | | | | | DIAGRAM PARAGRAPH |
| | | | | | | OVERALL DIMENSIONS PARAGRAPH |
| | | | | | | 10.1 |
| | | | | | | 10.2 |
| | | | | | | 10.3 |
| | | | | | | 10.4 |
| | | | | | | 10.5 |
| | | | | | | 10.6 |
| | | | | | | 10.7 |
| | | | | | | 10.7 |

8 - FUNCTIONAL DIAGRAMS

8.1 - R cover for directional control and check valve function with external pilot X

| Functional diagrams | Description |
|---------------------|--|
| | <p>Piloting of the cartridge valve through the X port, available on the mounting surface or with pipe connection 1/4" BSP.</p> <p>For ND 40 and ND 50 sizes, the external piloting function can be realised by using control cover type D, with blanking plate code 1950751 (to be ordered separately).</p> |

8.2 - D cover for directional control and check valve function

| Functional diagrams | Description |
|---------------------|---|
| | <p>Piloting of the cartridge valve by means of solenoid valve type DS3-TA (to be ordered separately - see catalogue 41 150)</p> <ul style="list-style-type: none"> - solenoid valve OFF = A ↔ B intercepted flow - solenoid valve ON = A ↔ B free flow |


8.3 - DZ cover for directional control with possibility to pilot other cartridges in line

| Functional diagrams | Description |
|---------------------|--|
| | <p>The DZ cover enables the piloting of its cartridge valves and also of other valves connected to Z1 and Z2 pilot lines.</p> <p>The solenoid valve type DS3-S10 must be ordered separately (see catalogue 41 150).</p> |


8.4 - DF1 cover for directional control and check function with double pilot line

| Functional diagrams | Description |
|---------------------|---|
| | <p>The DF1 cover gives the possibility of a double pilot line through X and Z1 ports.</p> <p>The solenoid valve type DS3-TA must be ordered separately (see catalogue 41 150).</p> <ul style="list-style-type: none"> - solenoid valve OFF = A ↔ B intercepted flow - solenoid valve ON = A → B free flow , B → A intercepted (if pilot line X is connected with B and if Z1 is connected with A). |



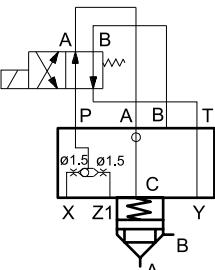
8.5 - DF2 cover for directional control and check function with priority piloting from two external lines

| Functional diagrams | Description |
|---|--|
|  | <p>The cartridge valve can be simultaneously piloted from X and Z1 lines.</p> <p>The shuttle valve, integrated in the cover, enables the automatic selection of the pilot line which has the higher pressure (priority line).</p> <p>The solenoid valve type DS3-TA must be ordered separately (see catalogue 41 150).</p> <ul style="list-style-type: none"> - solenoid valve OFF = A ↔ B intercepted flow - solenoid valve ON = A ↔ B free flow |

8.6 - Q cover for flow control function

| Functional diagrams | Description |
|--|--|
|  | <p>Flow control function by means of cover with stroke limiter.</p> <p>For a better flow control and to avoid the wear of the valve seat, this cover is normally used with a QD4 cartridge type.</p> |

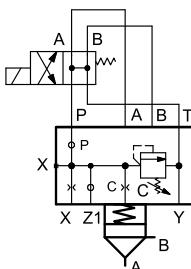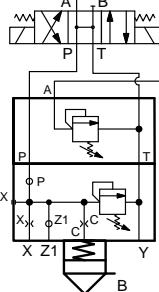8.7 - DP* cover for pressure control function

| Functional diagrams | Description |
|---|---|
|  | <p>Pressure control function with a built-in relief valve.</p> <ul style="list-style-type: none"> - max. adjustment pressure DP4 = 140 bar - DP6 = 350 bar <p>The top blanking plate code 1950591 must be ordered separately.</p> |
|  | <p>Pressure control function with electrical unloading by means of DS3-SA2 solenoid valve (to be ordered separately - see catalogue 41 150).</p> <ul style="list-style-type: none"> - solenoid valve OFF = unloading at minimum pressure - solenoid valve ON = pressure controlled by the built-in relief valve. |
|  | <p>Pressure control function with electrical unloading and two step pressure by means of the solenoid valves DS3-S2 (to be ordered separately - see catalogue 41 150), PLM3-AT*/10 (for 16, 25 and 32 sizes - to be ordered separately) and MCD*-SAT (for 40, 50 and 63 sizes to be ordered separately - see catalogue 61 200)</p> <ul style="list-style-type: none"> - solenoid valve OFF = unloading at minimum pressure - solenoid valve ON side a = pressure controlled by the relief valve integrated in the cover - solenoid valve ON side b = pressure controlled by the relief valve (PLM3 or MCD*) |

| | |
|--|--|
| | <p>Pressure control function with electrical control and three steps pressure by means of the solenoid valves DS3-S3 (to be ordered separately - see catalogue 41 150), PLM3-DT/10 (for 16 - 25 and 32 sizes - to be ordered separately) and MCD*-DT/51 (for 40 and 50 sizes - to be ordered separately - see catalogue 61 200)</p> <ul style="list-style-type: none"> - solenoid valve OFF = pressure controlled by the cover relief valve. - solenoid valve ON side a = pressure controlled by the relief valve on side b. - solenoid valve ON side b = pressure controlled by the relief valve on side a. |
|--|--|

8.8 - DPE* cover for pressure control function

| Functional diagram | Description |
|--------------------|--|
| | <p>Pressure control function by means of PDE3 proportional valve (to be ordered separately, see catalogue 81 211).</p> <ul style="list-style-type: none"> - max. adjustment pressure DPE4 = 140 bar - DPE6 = 350 bar - proportional valve OFF = unloading at minimum pressure - proportional valve ON = proportional control of pressure |

9 - TIGHTENING TORQUES FOR COVERS

Tightening torques in the chart below were calculated for screws with class A10.9, applying a total friction coefficient $\mu = 0,15$.

We recommend these tightening torques for screws suitable for the specified friction coefficient and for tightenings done with manual torque wrench.


| Size | Screws type (no. 4 pcs.) | Tightening torque ($\pm 10\%$) [Nm] |
|-----------|-----------------------------|--|
| 16 | M8 | 32 |
| 25 | M12 | 110 |
| 32 | M16 | 270 |
| 40 | M20 | 530 |
| 50 | M20 | 530 |
| 63 | M30 | 1900 |

NOTE: Screws characteristics for each type of cover are described in paragraph 10.


10 - OVERALL AND MOUNTING DIMENSIONS FOR CONTROL COVERS

10.1 - R type covers

dimensions in mm



LP16R
LP25R
LP32R
LP63R

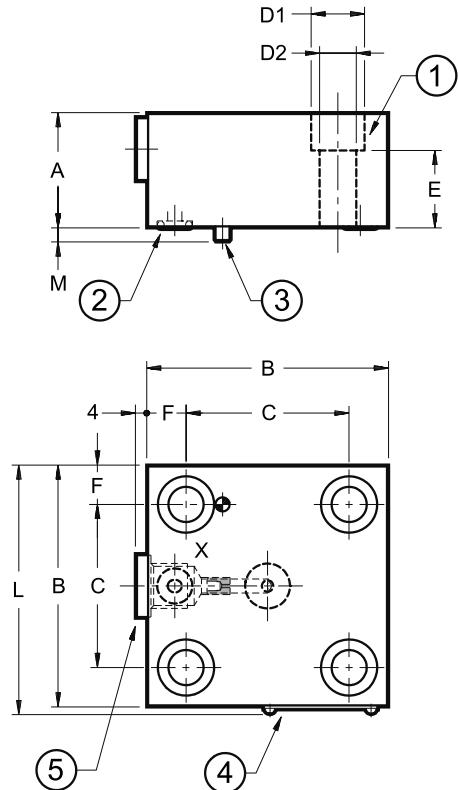

| | NOMINAL SIZE | | | |
|----|--------------|------|-------|-------|
| | 16 | 25 | 32 | 63 |
| A | 30 | 30 | 40 | 70 |
| B | 65 | 85 | 102 | 180 |
| C | 46 | 58 | 70 | 125 |
| D1 | 13,5 | 19 | 25 | 46 |
| D2 | 8,5 | 13 | 17 | 31 |
| E | 19 | 17 | 22 | 35 |
| F | 9,5 | 13,5 | 16 | 27,5 |
| L | 67,5 | 87,5 | 104,5 | 182,5 |
| M | 4 | 5 | 5 | 5 |


| | | |
|-----------------------------|--------|--------|
| ports ready for restrictors | port X | |
| restrictors | M6x8 | M10x10 |
| Mass [kg] | 1,20 | 2,30 |

| | |
|---|---|
| 1 | N. 4 fastening bolts (NOTE): 16 = M8x30 25 = M12x35 32 = M16x45 63 = M30x80 |
| 2 | N. 1 sealing ring 90 Shore: 16 = OR type 2025 (6.07x1.78) 25 = OR type 2037 (9.25x1.78) 32 = OR type 2043 (10.82x1.78) 63 = OR type 3062 (15.54x2.62) |
| 3 | Locating pin: 16 = Ø3x10 25 = Ø5x14 32 = Ø5x14 63 = Ø6x14 |
| 4 | Identification label |
| 5 | Plug X: 1/4" BSP |


NOTE: Fastening bolts class 10.9 ISO 4762 are recommended for the installation of the cover (to be ordered separately).
Tightening torques at par. 9

10.2 - Covers type D

dimensions in mm



LP16D
LP25D
LP32D
LP40D
LP50D
LP63D

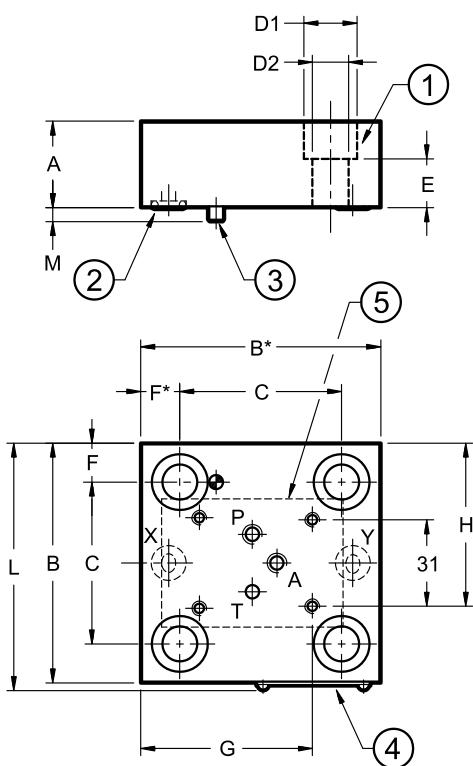

| | NOMINAL SIZE | | | | | |
|----|--------------|------|-------|-------|-------|-------|
| | 16 | 25 | 32 | 40 | 50 | 63 |
| A | 30 | 30 | 40 | 40 | 50 | 70 |
| B | 65 | 85 | 102 | 125 | 140 | 180 |
| B* | 75 | 85 | 102 | 125 | 140 | 180 |
| C | 46 | 58 | 70 | 85 | 100 | 125 |
| D1 | 13,5 | 19 | 25 | 31 | 31 | 46 |
| D2 | 8,9 | 13 | 17 | 21 | 21 | 31 |
| E | 19 | 17 | 22 | 30 | 30 | 35 |
| F | 9,5 | 13,5 | 16 | 20 | 20 | 27,5 |
| F* | 19,5 | 13,5 | 16 | 20 | 20 | 27,5 |
| G | 52 | 60,2 | 68,7 | 73,2 | 82,7 | 111,5 |
| H | 48 | 58 | 66,5 | 78 | 85,5 | 105,5 |
| L | 67,5 | 87,5 | 104,5 | 127,5 | 142,5 | 182,5 |
| M | 4 | 5 | 5 | 5 | 5 | 7 |


| | | | | | | |
|-----------------------------|------|------|------|------|-----|------|
| ports ready for restrictors | P, A | | | | | |
| restrictors | M6x8 | | | | | |
| Mass [kg] | 1,20 | 2,30 | 4,00 | 4,80 | 7,6 | 17,5 |

| | | |
|---|---|--|
| 1 | N. 4 fastening bolts (NOTE): 16 = M8x30 25 = M12x35 32 = M16x45 40 = M20x50 50 = M20x60 63 = M30x80 | |
| 2 | n° 2 sealing rings 90 Shore : 16 = OR type 2025 (6.07x1.78) 25 = OR type 2037 (9.25x1.78) 32 = OR type 2043 (10.82x1.78) 40 = OR type 2050 (12.42x1.78) 50 = OR type 2050 (12.42x1.78) 63 = OR type 3062 (15.54x2.62) | |
| 3 | Locating pin: 16 = Ø3x10 25 = Ø5x14 32 = Ø5x14 40 = Ø5x14 50 = Ø6x14 63 = Ø6x14 | |
| 4 | Identification label | |
| 5 | Mounting surface ISO 4401-03 (CETOP 4.2-4-03-350) | |


NOTE: Fastening bolts class 10.9 ISO 4762 are recommended for the installation of the cover (to be ordered separately).
Tightening torques at par. 9

10.3 - Covers type DZ

dimensions in mm



LP16DZ
LP25DZ
LP32DZ
LP40DZ

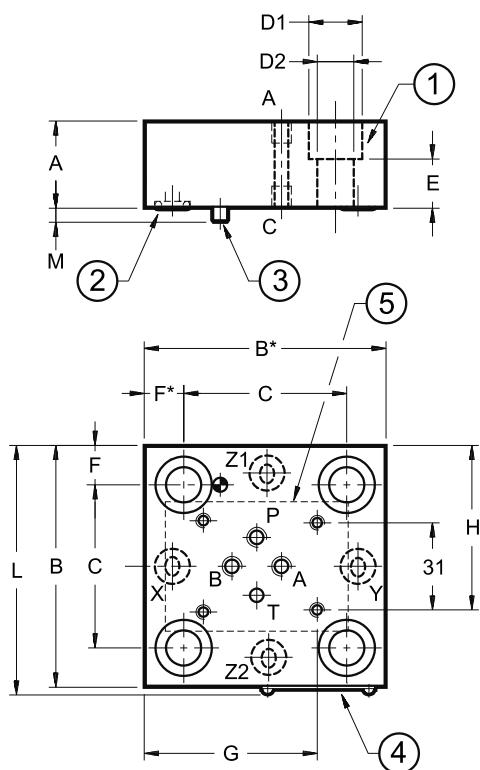

| | NOMINAL SIZE | | | |
|----|--------------|------|-------|-------|
| | 16 | 25 | 32 | 40 |
| A | 30 | 30 | 40 | 40 |
| B | 65 | 85 | 102 | 125 |
| B* | 75 | 85 | 102 | 125 |
| C | 46 | 58 | 70 | 85 |
| D1 | 13,5 | 19 | 25 | 31 |
| D2 | 8,9 | 13 | 17 | 21 |
| E | 19 | 17 | 22 | 20 |
| F | 9,5 | 13,5 | 16 | 20 |
| F* | 19,5 | 13,5 | 16 | 20 |
| G | 52 | 60,2 | 66,2 | 73,2 |
| H | 48 | 58 | 66,5 | 78 |
| L | 67,5 | 87,5 | 104,5 | 127,5 |
| M | 4 | 5 | 5 | 5 |


| | |
|----------------------------------|--------------------------|
| ports ready for restrictors M6x8 | P, A, B, C |
| Mass [kg] | 1,2 2,3 2,8 4,1 |

| | |
|---|---|
| 1 | N. 4 fastening bolts (NOTE): 16 = M8x30 25 = M12x35 32 = M16x45 40 = M20x50 |
| 2 | n° 4 sealing rings 90 Shore : 16 = OR type 2025 (6.07x1.78) 25 = OR type 2037 (9.25x1.78) 32 = OR type 2043 (10.82x1.78) 40 = OR type 2050 (12.42x1.78) |
| 3 | Locating pin: 16 = Ø3x10 25 = Ø5x14 32 = Ø5x14 40 = Ø5x14 |
| 4 | Identification label |
| 5 | Mounting surface ISO 4401-03 (CETOP 4.2-4-03-350) |



NOTE: Fastening bolts class 10.9 ISO 4762 are recommended for the installation of the cover (to be ordered separately). Tightening torques at par. 9

10.4 - Covers type DF1

dimensions in mm



LP16DF1

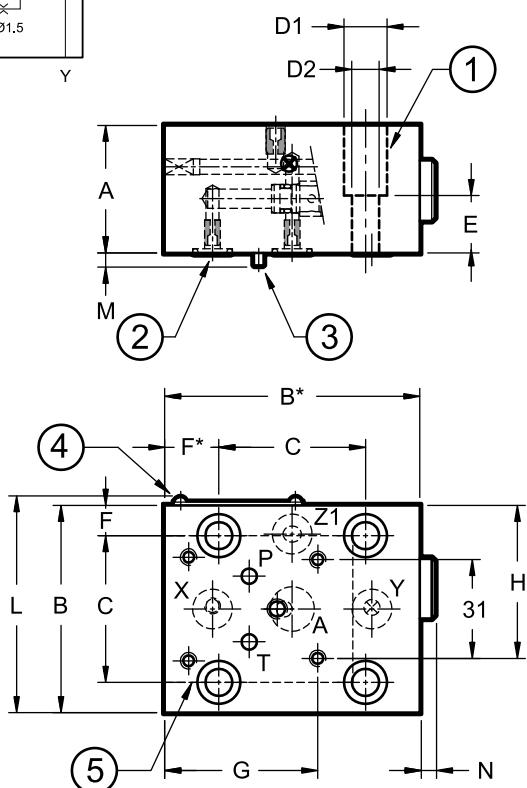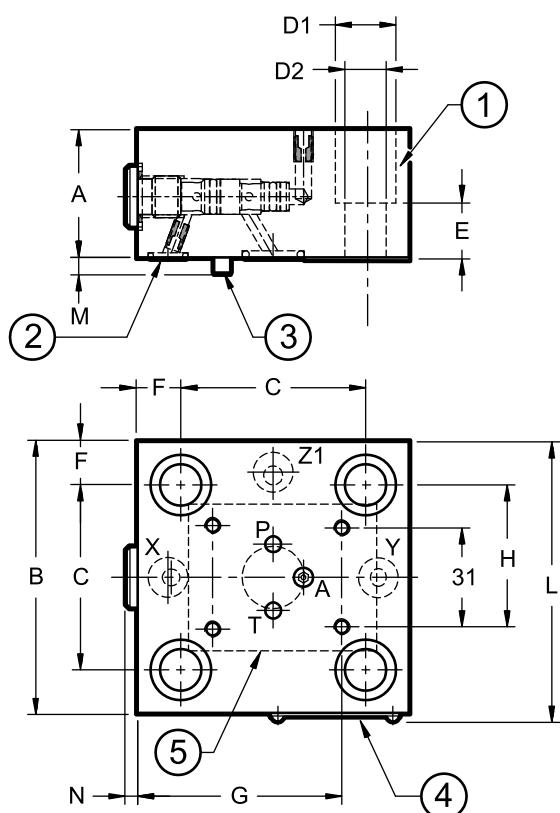LP25DF1
LP32DF1
LP40DF1
LP50DF1

| | NOMINAL SIZE | | | | |
|----|--------------|------|-------|-------|-------|
| | 16 | 25 | 32 | 40 | 50 |
| A | 40 | 40 | 40 | 50 | 50 |
| B* | 80 | 85 | 102 | 125 | 140 |
| B | 65 | 85 | 102 | 125 | 140 |
| C | 46 | 58 | 70 | 85 | 100 |
| D1 | 13,5 | 19 | 25 | 31 | 31 |
| D2 | 8,5 | 13 | 17 | 21 | 21 |
| E | 18 | 17 | 22 | 30 | 30 |
| F* | 17 | 13,5 | 16 | 20 | 20 |
| F | 9,5 | 13,5 | 16 | 20 | 20 |
| G | 47,5 | 64 | 72,5 | 84 | 91,5 |
| H | 48 | 58 | 66,5 | 78 | 85,5 |
| L | 67,5 | 87,5 | 104,5 | 127,5 | 142,5 |
| M | 4 | 5 | 5 | 5 | 5 |
| N | 4,5 | 3,5 | 3,5 | - | - |


| | | | | | |
|-----------|-----|-----|---|-----|-----|
| Mass [kg] | 1,8 | 2,3 | 3 | 6,7 | 7,6 |
|-----------|-----|-----|---|-----|-----|

| | |
|---|--|
| 1 | N. 4 fastening bolts (NOTE): 16 = M8x30 25 = M12x35 32 = M16x45 40 = M20x60 50 = M20x60 |
| 2 | N° 3 sealing rings 90 Shore: 16 = OR type 2037 (9.25x1.78) 25 = OR type 2037 (9.25x1.78) 32 = OR type 2043 (10.82x1.78) 40 = OR type 2050 (12.42x1.78) 50 = OR type 2050 (12.42x1.78) |
| 3 | Locating pin 16 = Ø3x10 40 = Ø5x14 25 = Ø5x14 50 = Ø6x14 32 = Ø5x14 |
| 4 | Identification label |
| 5 | Mounting surface ISO 4401-03 (CETOP 4.2-4-03-350) |


NOTE: Fastening bolts class 10.9 ISO 4762 are recommended for the installation of the cover (to be ordered separately).
Tightening torques at par. 9

10.5 - Covers type DF2

dimensions in mm



LP16DF2
LP25DF2
LP32DF2
LP40DF2
LP50DF2

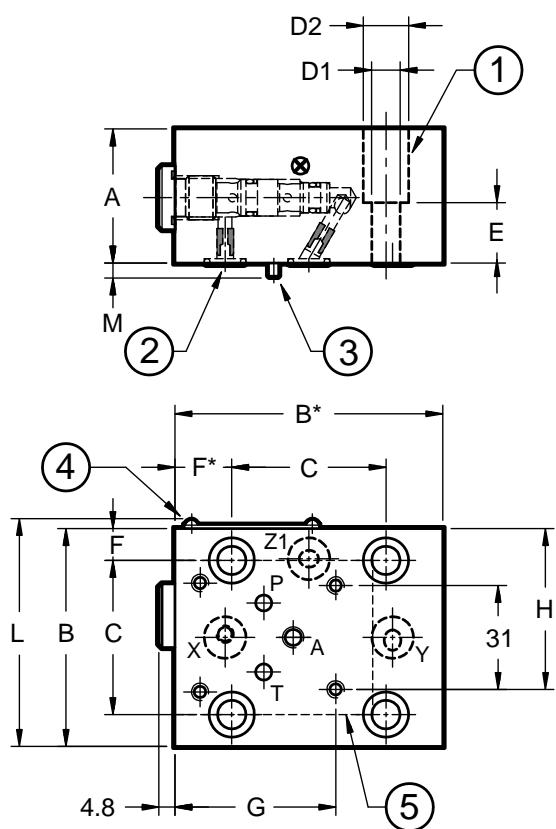

| | NOMINAL SIZE | | | |
|----|--------------|------|-------|-------|
| | 16 | 25 | 32 | 40 |
| A | 40 | 40 | 40 | 50 |
| B | 65 | 85 | 102 | 125 |
| B* | 80 | 85 | 102 | 125 |
| C | 46 | 58 | 70 | 85 |
| D1 | 13,5 | 19 | 25 | 31 |
| D2 | 8,5 | 13 | 17 | 21 |
| E | 18 | 17 | 22 | 30 |
| F | 9,5 | 13,5 | 16 | 20 |
| F* | 17 | 13,5 | 16 | 20 |
| G | 48 | 61 | 68,7 | 81 |
| H | 48 | 58 | 71,2 | 73 |
| L | 67,5 | 87,5 | 104,5 | 127,5 |
| M | 4 | 5 | 5 | 5 |


| | | | | |
|----------------------------------|---------------|--|--|--|
| ports ready for restrictors M6x8 | A | | | |
| Mass [kg] | 1,8 2,3 3 6,7 | | | |

| | | | | |
|---|---|--|--|--|
| 1 | N. 4 fastening bolts (NOTE): 16 = M8x30 25 = M12x35 32 = M16x45 40, 50 = M20x60 | | | |
| 2 | N° 3 sealing rings 90 Shore: 16, 25 = OR type 2037 (9,25x1,78) 32 = OR type 2043 (10,82x1,78) 40, 50 = OR type 2050 (12,42x1,78) | | | |
| 3 | Locating pin 16 = Ø3x10 32 = Ø5x14 25 = Ø5x14 40 = Ø5x14 50 = Ø6x14 | | | |
| 4 | Identification label | | | |
| 5 | Mounting surface ISO 4401-03 (CETOP 4.2-4-03-350) | | | |




NOTE: Fastening bolts class 10.9 ISO 4762 are recommended for the installation of the cover (to be ordered separately). Tightening torques at par. 9

10.6 - Covers type Q

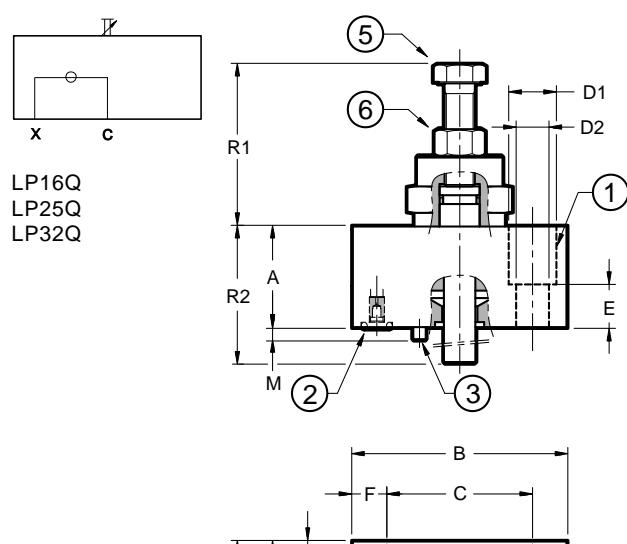dimensions in mm



| | NOMINAL SIZE | | | | | |
|----|--------------|-----------|-------------|-----------|-------------|-----------|
| | 16 | 25 | 32 | 40 | 50 | 63 |
| A | 35 | 40 | 40 | 60 | 60 | 80 |
| B | 65 | 85 | 102 | 125 | 140 | 180 |
| C | 46 | 58 | 70 | 85 | 100 | 125 |
| D1 | 13,5 | 19 | 25 | 31 | 31 | 46 |
| D2 | 8,5 | 13 | 17 | 21 | 21 | 31 |
| E | 18 | 17 | 22 | 30 | 30 | 45 |
| F | 9,5 | 13,5 | 16 | 20 | 20 | 27,5 |
| L | 67,5 | 87,5 | 104,5 | 127,5 | 142,5 | 182,5 |
| M | 4 | 5 | 5 | 5 | 5 | 5 |
| R1 | 55,5 ÷ 63,5 | 62,5 ÷ 74 | 58,5 ÷ 73,5 | 38,5 ÷ 57 | 44,5 ÷ 66,5 | 52 ÷ 81 |
| R2 | 45 ÷ 51,5 | 45 ÷ 51,5 | 45 ÷ 51,5 | 44 ÷ 52 | 44 ÷ 52 | 165 ÷ 194 |

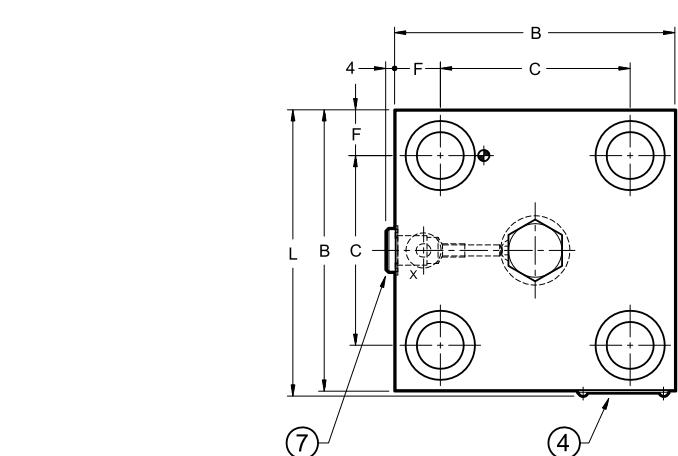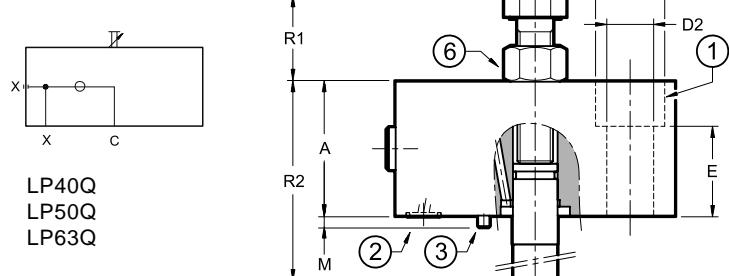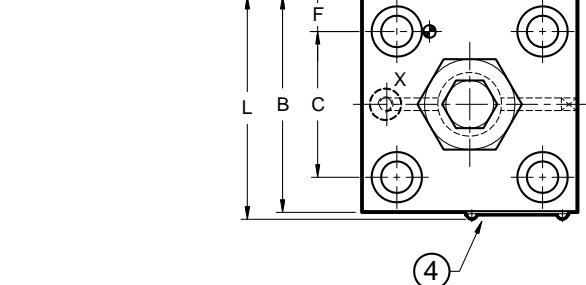



| | | | | |
|-----------------------------|--------|------|---|-----|
| ports ready for restrictors | port X | | | |
| | M5x8 | M6x8 | | |
| Mass [kg] | 1,6 | 3 | 5 | 8,9 |

| | |
|---|---|
| 1 | N. 4 fastening bolts (NOTE): 16 = M8x30 25 = M12x35 32 = M16x35 40 = M20x70 50 = M20x70 63 = M30x90 |
| 2 | n° 1 sealing ring 90 Shore: 16 = OR type 2025 (6.07x1.78) 25 = OR type 2037 (9.25x1.78) 32 = OR type 2043 (10.82x1.78) 40 = OR type 2050 (12.42x1.78) 50 = OR type 2050 (12.42x1.78) 63 = OR type 3062 (15.54x2.62) |
| 3 | Locating pin: 16 = Ø3x10 25 = Ø5x14 32 = Ø5x14 40 = Ø5x14 50 = Ø6x14 63 = Ø6x14 |
| 4 | Identification label |
| 5 | Stroke limiter clockwise rotation to reduce stroke 16 = 1 turn: 1,25 mm - spanner 18 25 = 1 turn: 1,25 mm - spanner 18 32 = 1 turn: 1,25 mm - spanner 18 40 = 1 turn: 2,00 mm - spanner 24 50 = 1 turn: 2,50 mm - spanner 30 63 = 1 turn: 2,00 mm - spanner 36 |
| 6 | Locking nut: 16 = spanner 18 25 = spanner 18 32 = spanner 18 40 = spanner 24 50 = spanner 30 63 = spanner 36 |
| 7 | Plug X: 40 = 1/4" BSP 50 = 1/4" BSP 63 = 1/4" BSP |

NOTE: Fastening bolts class 10.9 ISO 4762 are recommended for the installation of the cover (to be ordered separately).
Tightening torques at par. 9


10.7 - Covers type DP* and DPE*

dimensions in mm



LP16DP*
LP25DP*
LP32DP*
LP40DP*
LP50DP*
LP63DP*

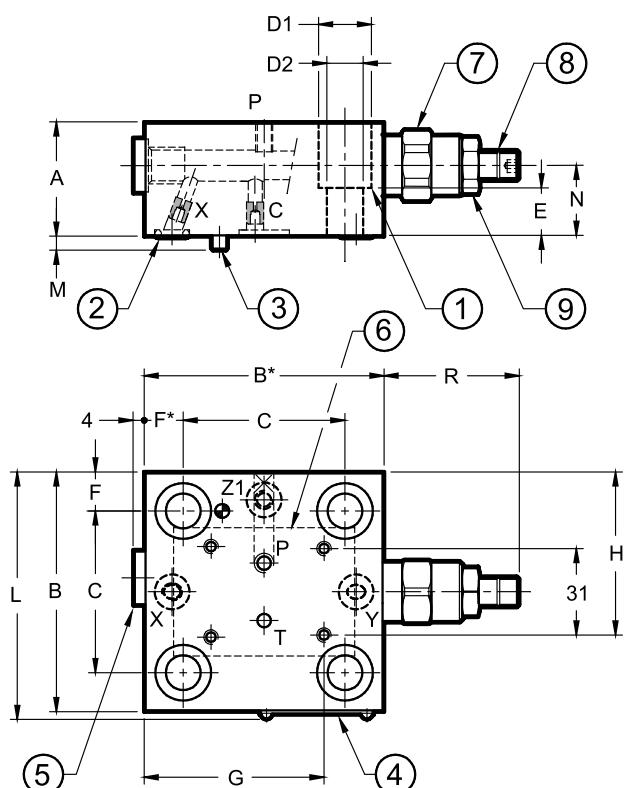LP16DPE*
LP25DPE*
LP32DPE*
LP40DPE*
LP50DPE*



| | NOMINAL SIZE | | | | | |
|----|--------------|---------|---------|-------|-------|-------|
| | 16 | 25 | 32 | 40 | 50 | 63 |
| A | 40 | 40 | 40 | 50 | 50 | 70 |
| B | 65 | 85 | 102 | 125 | 140 | 180 |
| B* | 75 | 85 | 102 | 125 | 140 | 180 |
| C | 46 | 58 | 70 | 85 | 100 | 125 |
| D1 | 13,5 | 19 | 25 | 31 | 31 | 46 |
| D2 | 8,5 | 13 | 17 | 21 | 21 | 31 |
| E | 18 | 17 | 22 | 30 | 30 | 35 |
| F | 9,5 | 13,5 | 16 | 20 | 20 | 27,5 |
| F* | 19,5 | 13,5 | 16 | 20 | 20 | 27,5 |
| G | 52 | 64 | 72,5 | 84 | 91,5 | 111,5 |
| H | 48 | 58 | 66,5 | 78 | 85,5 | 105,5 |
| L | 67,5 | 87,5 | 104,5 | 127,5 | 142,5 | 182,5 |
| M | 4 | 5 | 5 | 5 | 5 | 5 |
| N | 22 | 23 | 22 | 25 | 25 | 35 |
| R | 45÷50,5 | 45÷50,5 | 45÷50,5 | 44÷52 | 44÷52 | 44÷52 |

| Mass [kg] | 1,2 | 2,4 | 4 | 7,4 | 10,5 | 17,5 |
|-----------|-----|-----|---|-----|------|------|
| | | | | | | |

DP* restrictors

| | M5x6 | M6x8 | | | M8x8 |
|---|--------------|--------------|--------------|--------------|--------------|
| X | Ø1,2 Ø0,7 | Ø1,2 Ø0,7 | Ø1,2 Ø1,5 | Ø2,0 Ø1,2 | Ø2,0 Ø1,5 |
| C | | | | | |

DPE* restrictors

| | M5x6 | M6x8 | M6x8 | M6x8 | M6x8 |
|----|------|------|------|------|------|
| X | Ø0,8 | Ø0,7 | Ø1 | Ø1 | Ø1 |
| C | Ø0,6 | Ø0,6 | Ø0,8 | Ø0,8 | Ø0,8 |
| Z1 | Ø0,6 | Ø0,6 | Ø0,6 | Ø0,6 | Ø0,6 |

| | |
|---|---|
| 1 | N. 4 fastening bolts (NOTE): 16 = M8x30 25 = M12x35 32 = M16x45 40 = M20x50 40 and 50 = n° 3 OR type 2050 (12.42x1.78) 63 = OR type 3062 (15.54x2.62) |
| 2 | n° 3 90 Shore sealing rings : 16 = OR type 2025 (6.07x1.78) 25 = OR type 2037 (9.25x1.78) 32 = OR type 2043 (10.82x1.78) 40 and 50 = n° 3 OR type 2050 (12.42x1.78) 63 = OR type 3062 (15.54x2.62) |
| 3 | Locating pin: 16 = Ø3x10 25, 32 and 40 = Ø5x14 50 and 63 = Ø6x14 |

| | |
|---|---|
| 4 | Identification label |
| 5 | Plug X: 1/4" BSP |
| 6 | Mounting surface ISO 4401-03 |
| 7 | Pressure control valve |
| 8 | Countersunk hex adjustment screw: Allen key 6 Clockwise rotation to increase pressure |
| 9 | Locking nut: spanner 19 |

NOTE: Fastening bolts class 10.9 ISO 4762 are recommended for the installation of the cover (to be ordered separately).
Tightening torques at par. 9



11 - MONITORED LOGIC ELEMENTS

Monitored logic elements are made of a cartridge valve with directional function and of a cover with built-in inductive proximity sensor. The PNP type sensor with closed contact states the condition of A↔B intercepted flow.



WARNING! These valves must be installed and commissioned by qualified personnel only. Before starting any installation, commissioning or maintenance, it is mandatory to read the *Manual of Use and Maintenance*, delivered together with the valve.

11.1 - TÜV Certification

The LCM*-QD4 monitored logic elements were tested on a voluntary basis by TÜV and found to comply with the applicable requirements of the following standard:

- EN ISO 4413:2012 Hydraulic fluid power – General rules and safety requirements for systems and their components

The components can be considered well tried if they comply the basic safety principles and the well tried safety principles specified in tables C.1 and C.2 of the EN ISO 13849-2:2013 standard depending on the specific application.

The LCM*-QD4 family can be used in safety related parts of control system in category 1 (or higher) as indicated in the standard EN ISO 13849-1:2015. Possible applications are:

- EN 20430:2020 standards - Machines for plastics and rubber - Injection presses - Safety requirements
- EN 16092-3:2018 - Machine tool safety - Presses - Part 3: Safety requirements for hydraulic presses
- EN 12622:2014 - Machine tool safety - Hydraulic press brakes
- EN 422:2009 - Machines for rubber and plastic - Safety requirements.

The state of well-tried component is mainly application specific.



Certificate: **TÜV IT 14 MAC 0042**

11.2 - Identification code of monitored logic elements



| | |
|---|--|
| L C M | - Q D 4 / 21 N |
| Logic element (cartridge and cover) with closed position electric monitoring | Option: LL = Low leakage version, with seal between C and B. Omit if not required. |
| Nominal dimension: 16 = ND 16 25 = ND 25 32 = ND 32 40 = ND 40 50 = ND 50 | Seals: NBR seals for mineral oil |
| Cover functions (for details, see par. 10.3 and 10.4) D = directional control and check valve function Z = directional control and piloting of other cartridges Q = flow control (not available for ND 32 and ND 40) | Series no.: (the overall and mounting dimensions remain unchanged from 20 to 29) |
| Cartridge valve area ratio (A_1 / A_3) = 1:1,66 | Nominal cracking pressure on section A_1 = 4 bar |
| | Version with damping nose |
| | p max 350 bar |

11.3 - Characteristic curves

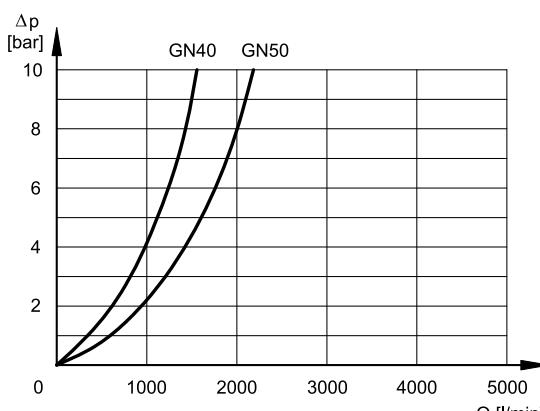
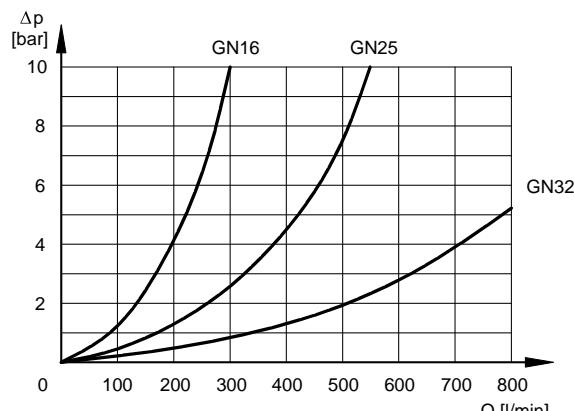
(values obtained with viscosity 36 cSt at 50°C)



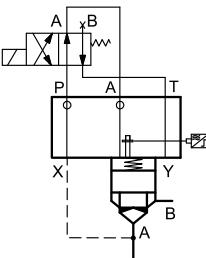
11.4 - Functional diagram of logic element type D, for directional control and check valve function.

| Functional diagram | Description |
|---|--|
|  | <p>Piloting of cartridge valve by means of a solenoid valve type DS3-TA (to be ordered separately - see catalogue 41 150)</p> <ul style="list-style-type: none"> - solenoid valve OFF = A → B intercepted flow - solenoid valve ON = A ↔ B free flow |
|  | <p>Piloting of cartridge valve by means of connection plate code 1950751 to be ordered separately.</p> |

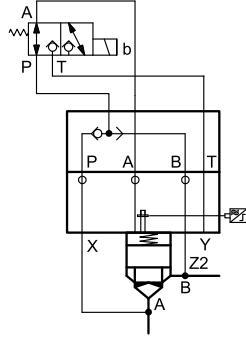
11.5 - Functional diagrams of logic element type Z, for directional control and piloting of other cartridges

| Functional diagram | Description |
|---|---|
|  | <p>Piloting of cartridge valve by means of a solenoid poppet valve type DT03-3A (to be ordered separately - see catalogue 42 200).</p> <p>ISO 4401-03 manifold type DN6 (cod.0294329 - to be ordered separately) that allows to intercept the flow from two lines, obtaining a tight or the free flow.</p> <ul style="list-style-type: none"> - solenoid valve OFF = sealing tight - A ↔ B locked flow - solenoid valve ON = flow A ↔ B free flow |
|  | <p>Piloting of cartridge valve by means of connection plate code 1950751, to be ordered separately.</p> |



11.6 - Functional diagrams of logic element type Q, for flow control function

| Functional diagram | Description |
|---|---|
|  | <p>Flow control function by means of cover with stroke limiter.</p> <p>This cover is coupled with a cartridge QD4 type, in order to obtain a better flow control and to avoid the wear of the seat.</p> |

11.7 - Overall and mounting dimensions of monitored logic elements types D and Z



LCM16D-QD4
LCM25D-QD4
LCM32D-QD4
LCM40D-QD4
LCM50D-QD4

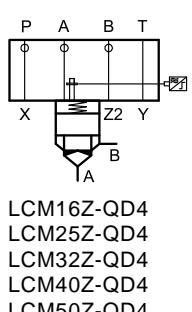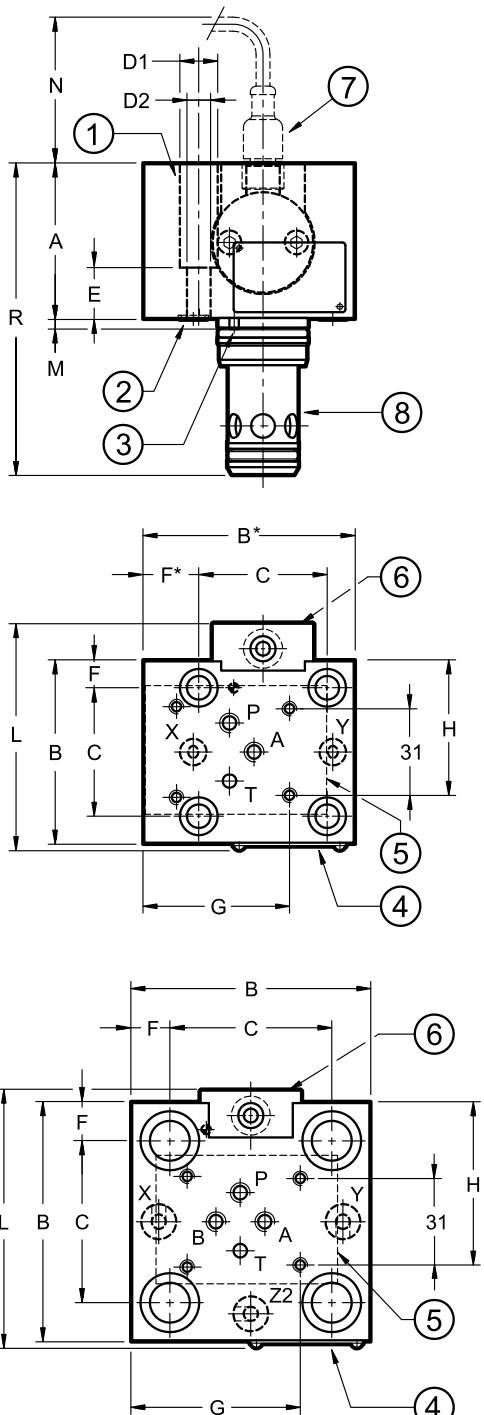

LCM16Z-QD4
LCM25Z-QD4
LCM32Z-QD4
LCM40Z-QD4
LCM50Z-QD4

dimensions in mm

| | NOMINAL SIZE | | | | |
|------------|--------------|------|-------|-------|-------|
| | 16 | 25 | 32 | 40 | 50 |
| A (NOTE 1) | 55 | 60 | 70 | 75 | 90 |
| B | 65 | 85 | 102 | 125 | 140 |
| B* | 75 | - | - | - | - |
| C | 46 | 58 | 70 | 85 | 100 |
| D1 | 13,5 | 19 | 25 | 31 | 31 |
| D2 | 8,5 | 12,5 | 17 | 21 | 21 |
| E | 18 | 17 | 22 | 30 | 30 |
| F* | 19,5 | - | - | - | - |
| F | 9,5 | 13,5 | 16 | 20 | 20 |
| G | 52 | 60,2 | 68,7 | 80,2 | 87,7 |
| H | 48 | 58 | 66,5 | 105 | 85,5 |
| L | 81 | 92 | 104,5 | 127,5 | 142,5 |
| M | 4 | 5 | 5 | 5 | 5 |
| N | 70 | 70 | 65 | 60 | 55 |
| R (NOTE 1) | 111 | 132 | 155 | 180 | 212 |

| | |
|------------------------------------|-----------------------------|
| ports ready for restrictors M6x8.5 | P, A B (on cover Z only) |
| Mass [kg] | 2,1 3,3 5,3 9,5 14,5 |





| | |
|---|---|
| 1 | N. 4 fastening bolts (NOTE): 16 = M8x30 40 = M20x60 25 = M12x35 50 = M20x60 32 = M16x45 |
| 2 | n° 3 sealing rings 90 Shore : 16 = OR type 2025 (6.07x1.78) (for ND 16 there are only 2 OR) 25 = OR type 2037 (9.25x1.78) 32 = OR type 2043 (10.82x1.78) 40 and 50 = OR type 2050 (12.42x1.78) |
| 3 | Locating pin: 16 = Ø3x10 40 = Ø5x14 25 = Ø5x14 50 = Ø6x14 32 = Ø5x14 |
| 4 | Identification label |
| 5 | Mounting surface ISO 4401-03 (CETOP 4.2-4-03-350) |
| 6 | Proximity sensor |
| 7 | Connector for proximity sensor (to be ordered separately see par. 11.9) |
| 8 | Slip-in cartridge valve always supplied with the cover |

NOTE 1: For LCM16Z-QD4 only: add 10 mm to the indicated value.

NOTE 2: Fastening bolts class 10.9 ISO 4762 are recommended for cover installation (to be ordered separately). Tightening torques at par. 9. standardized dimensions at par. 6. Dimensions of the cartridge valve seat at par. 5.

11.8 - Overall and mounting dimensions of monitored logic elements type Q

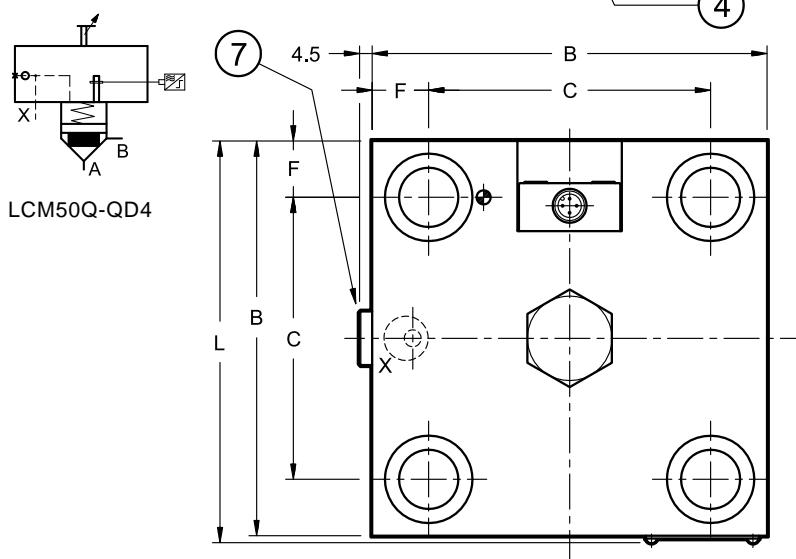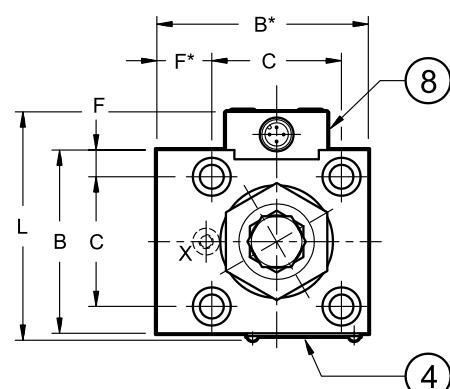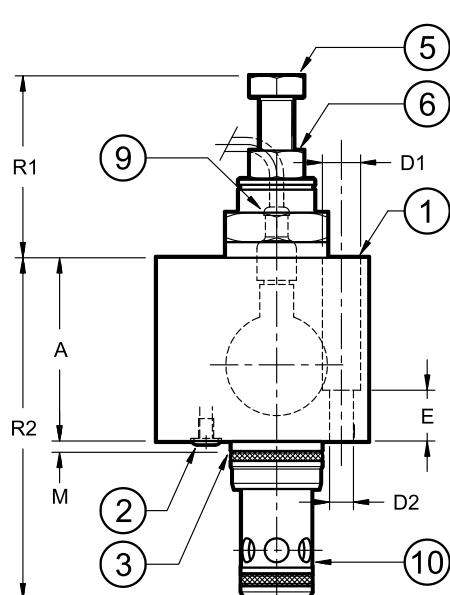dimensions in mm

LCM16Q-QD4
LCM25Q-QD4

| | NOMINAL SIZE | | |
|----|--------------|-------------|-------------|
| | 16 | 25 | 50 |
| A | 65 | 70 | 130 |
| B | 65 | 85 | 140 |
| B* | 75 | - | - |
| C | 46 | 58 | 100 |
| D1 | 13,5 | 19 | 31 |
| D2 | 8,5 | 12,5 | 21 |
| E | 18 | 17 | 30 |
| F* | 19,5 | - | - |
| F | 9,5 | 13,5 | 20 |
| L | 81 | 92 | 142,5 |
| M | 4 | 5 | 5 |
| R1 | 52 ÷ 64,5 | 48,3 ÷ 64,5 | 38,7 ÷ 62,5 |
| R2 | 121 | 142 | 152 |


| ports ready for restrictors | port X | |
|-----------------------------|--------|------|
| | M5x8 | M6x8 |
| Mass [kg] | 2,1 | 4,0 |
| | | 19,3 |

| | |
|----|---|
| 1 | N. 4 fastening bolts (NOTE): 16 = M8x30 25 = M12x35 50 = M20x60 |
| 2 | Sealing rings 90 Shore: 16 = n° 1 OR type 2025 (6.07x1.78) 25 = n° 1 OR type 2037 (9.25x1.78) 40 = n° 1 OR type 2050 (12.42x1.78) |
| 3 | Locating pin: 16 = Ø3x10 25 = Ø5x14 50 = Ø6x14 |
| 4 | Identification label |
| 5 | Stroke limiter clockwise rotation to reduce stroke 16 = 1 turn: 1,25 mm - spanner 18 25 = 1 turn: 1,25 mm - spanner 18 50 = 1 turn: 2,50 mm - spanner 30 |
| 6 | Locking nut: 16 = spanner 19 25 = spanner 19 50 = spanner 30 |
| 7 | Plug X: 50 = 1/4" BSP |
| 8 | Proximity sensor |
| 9 | Connector for proximity sensor (to be ordered separately see par. 11.9) |
| 10 | Slip-in cartridge valve always supplied with the cover |

NOTES: Fastening bolts class 10.9 ISO 4762 are recommended for cover installation (to be ordered separately). Tightening torques at par. 9. Standardized dimensions at par. 6. Dimensions of the cartridge valve seat at par. 5.

11.9 - Technical characteristics of proximity sensor and connector**PROXIMITY SENSOR
PNP TYPE**

| | | |
|--|--|-----------|
| Rated voltage | V DC | 24 |
| Power supply voltage range | V DC | 10 ÷ 30 |
| Absorbed current | mA | 200 |
| Output | normally open contact | |
| Electric protection | polarity inversion short circuit overvoltage | |
| Electric connection | with connector | |
| Max operating pressure | bar | 350 |
| Operating temperature range | °C | -25 / +80 |
| Class of protection according to IEC EN 60529 standards (atmospheric agents) | | IP68 |
| Spool position LED | | NO |

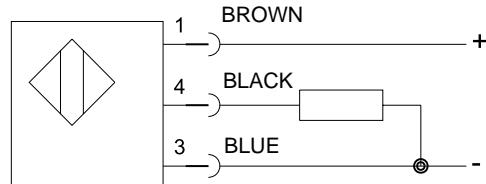CONNECTION SCHEME

valve closed = closed contact (A↔B intercepted flow)
valve open = open contact (A↔B free flow)

SIGNAL STATUS

According to the safety standards rules, the position signal must change its status before the effective valve opening.

ELECTRIC CONNECTOR (to be ordered separately)

code: ECM3S/M12L/10/L5

Connector: pre-wired connector M12 - IP68

cable: with 3 conductors 0.34 mm² - length 5 mt

cable material: polyurethane resin (oil resistant)

GREEN LED: indicates power supply voltage to the connector.
If the LED is off, the connector is not powered.

YELLOW LED: show the valve status.

- valve at initial position yellow led ON - green led ON
- switched valve yellow led OFF - green led ON



LCM*
SERIES 21

DUPLOMATIC
MOTION SOLUTIONS
a member of DAIKIN group

DUPLOMATIC MS Spa

via Mario Re Depaolini, 24 | 20015 Parabiago (MI) | Italy

T +39 0331 895111 | E vendite.ita@duplomatic.com | sales.exp@duplomatic.com

duplomaticmotionsolutions.com