



Japanese Technology since 1912

AGA

Data Book 60Hz



	Page
- SPECIFICATIONS	200
PERFORMANCE RANGE and SELECTION CHART	201
TYPE KEY and CURVES SPECIFICATIONS	202
PERFORMANCE CURVES	203
- CONSTRUCTIONS	300
SECTIONAL VIEW	300
MECHANICAL SEAL	301
BEARINGS	301
- DIMENSIONS and WEIGHT	400
PUMP	400
PACKING	401
- TECHNICAL DATA	500
MOTOR DATA	500

SPECIFICATIONS

60Hz


Rev. G

PUMP		
Liquid Handled	Type of liquid	Clean water
	Temperature [°C]	min. +5 max. +45
Maximum working pressure [MPa]		0.6 (AGA 106) 1.0 (AGA 156-206-306)
Maximum suction depth [m]		8
Construction	Impeller	Closed centrifugal type
	Shaft seal type	Mechanical seal
	Bearing	Sealed ball bearing
Pipe Connection	Suction	G 1 (AGA 106) UNI ISO 228
		G 1½ (AGA 156-206-306) UNI ISO 228
	Discharge	G 1 UNI ISO 228
Material	Casing	Cast iron
	Impeller	PPE+PS glass fibre reinforced (AGA 106) Brass (AGA 156-206-306)
	Shaft seal	Ceramic/Carbon/NBR
	Casing cover	AISI 304 (AGA 106) Cast iron built-in the motor bracket (AGA 156-206-306)
	Shaft	AISI 303 (wet extension)
	Bracket	Aluminium (AGA 106) Cast iron (AGA 156-206-306)
	Ejector	PPE+PS glass fibre reinforced
	Diffuser	PPE+PS glass fibre reinforced
Applicable standard of test		ISO 9906:2012 - Grade 3B

MOTOR		
Type	Electric - TEFC	
	Single Phase	Three Phase
Efficiency level (Reg. 1781/2019)	-	- 0.55 kW - from 0.75 kW up to 2.2 kW IE3* from 0.75 kW up to 2.2 kW
No. of Poles	2	
Rotation speed [min ⁻¹]	~3450	
Insulation Class	F	
Protection degree (CEI EN 60034-5)	IP 44	
Power rating	[kW]	0.44÷1.5
	[HP]	0.6÷2
Frequency [Hz]	60	
Voltage [V]	110-115 ±6%	220/380 -6% +10% (0.55 kW)
	220-230 ±6%	220/380 ±10% (from 0.75 kW up to 2.2 kW)
		220/380-460 ±10% (IE3* 0.75 kW up to 2.2 kW)
Capacitor	Built in	-
Over load protection	Built in	Provided by the user
Casing material	Aluminium	
Base material / Motor support	Plastic foot / Cast iron	
Dimensions of cable entry	PG11 - PG13.5 - M16x1.5 - M20x1.5 (see page 400)	

* only for 460


PERFORMANCE RANGE

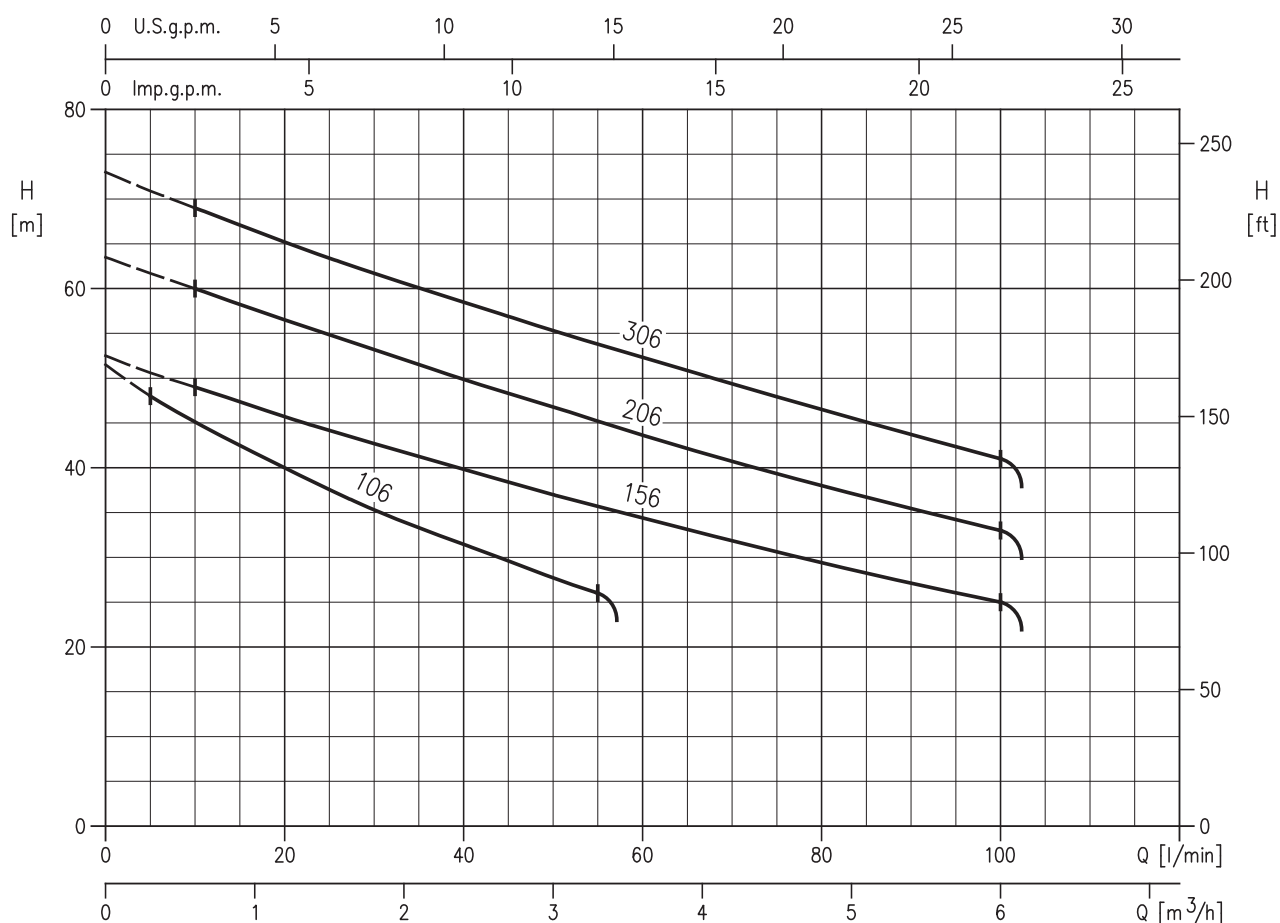

SELECTION CHART

Pump type		Q =Capacity										
		l/min	0	5	10	20	30	45	50	55	80	100
Single phase	Three phase	m³/h	0	0.3	0.6	1.2	1.8	2.7	3.0	3.3	4.8	6.0
		H=Total head [m]										
-	AGA 106 T	51.5	48	45.1	40	35.3	29.6	27.7	26	-	-	
-	AGA 156 T	52.5	-	49	45.7	42.7	38.4	37	35.7	29.4	25	
AGA 206 M	AGA 206 T	63.5	-	60	56.5	53.2	48.3	46.8	45.2	38	33	
-	AGA 306 T	73	-	69	65.2	61.7	56.9	55.3	53.8	46.5	41	

TYPE KEY

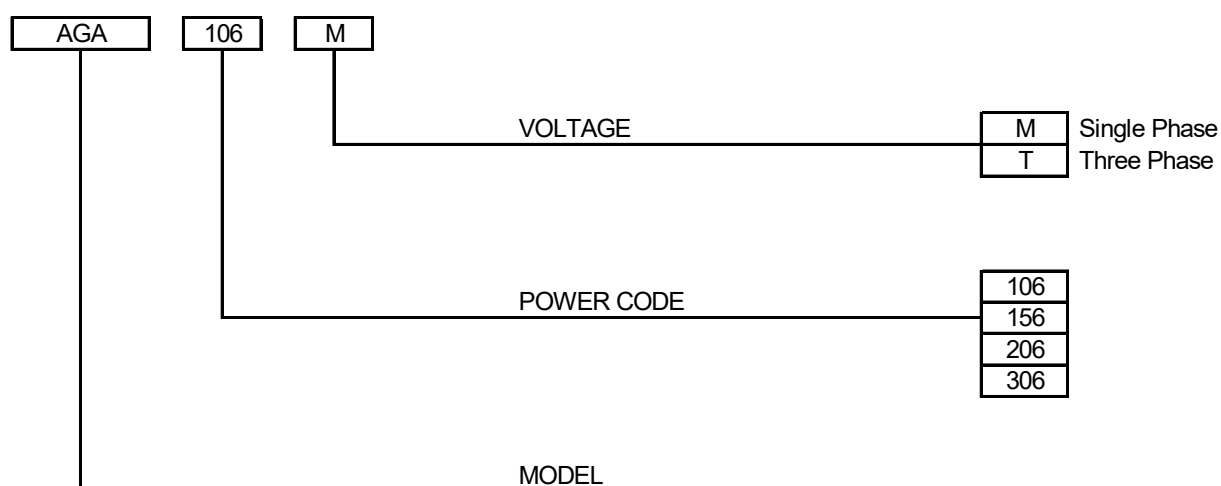

CURVES SPECIFICATIONS

The specifications below qualify the curves shown on the following pages.

Tolerances according to ISO 9906:2012 - Grade 3B

The curves refer to effective speed of asynchronous motors at 60 Hz

Measurements were carried out with clean water at 20°C of temperature and with a kinematic viscosity of $\nu = 1 \text{ mm}^2/\text{s}$ (1 cSt)


The continuous curves indicate the recommended working range. The dotted curve is only a guide.

In order to avoid the risk of over-heating, the pumps should not be used at a flow rate below 10% of best efficiency point.

Symbols explanation:

Q = volume flow rate
H = total head

AGA 106- Impeller diameter = 116 mm

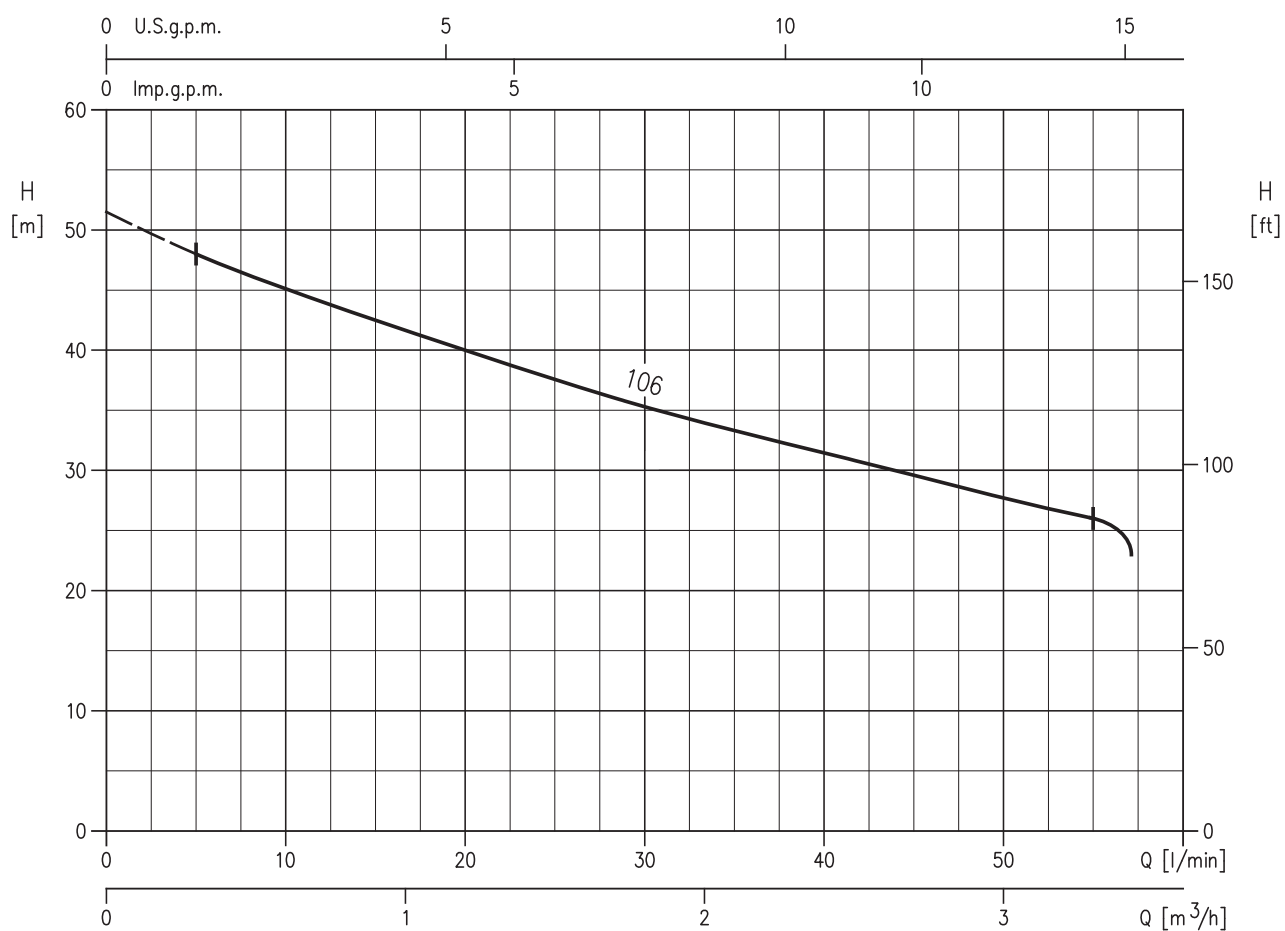


Rotation speed $\approx 3450 \text{ min}^{-1}$
Test standard: ISO 9906:2012 - Grade 3B

AGA 156- Impeller diameter = 122 mm


AGA 206- Impeller diameter = 135 mm

AGA 306- Impeller diameter = 144 mm

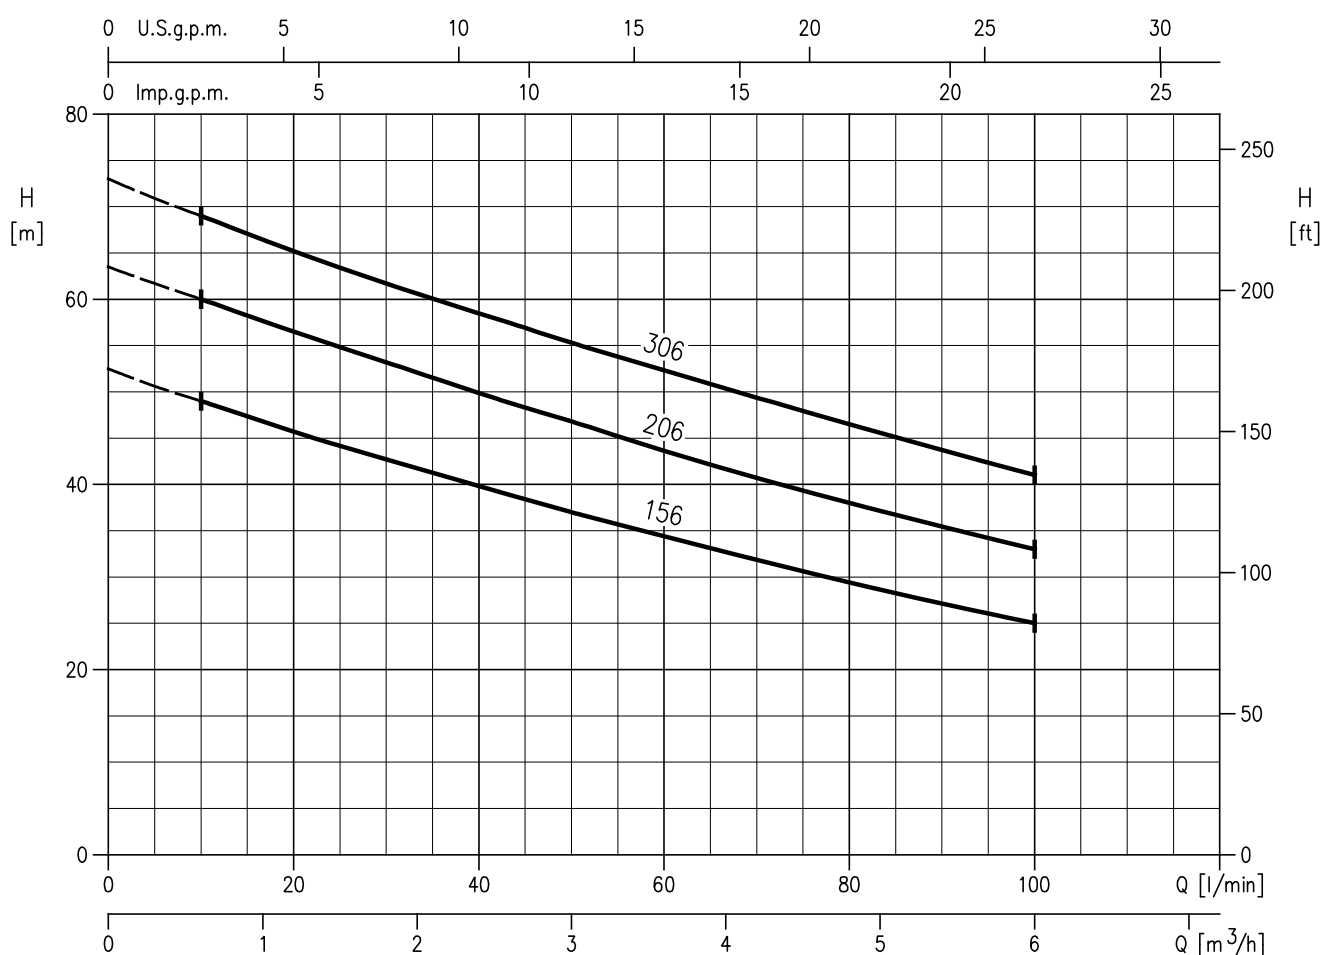Rotation speed $\approx 3450 \text{ min}^{-1}$

Test standard: ISO 9906:2012 - Grade 3B

SECTIONAL VIEW

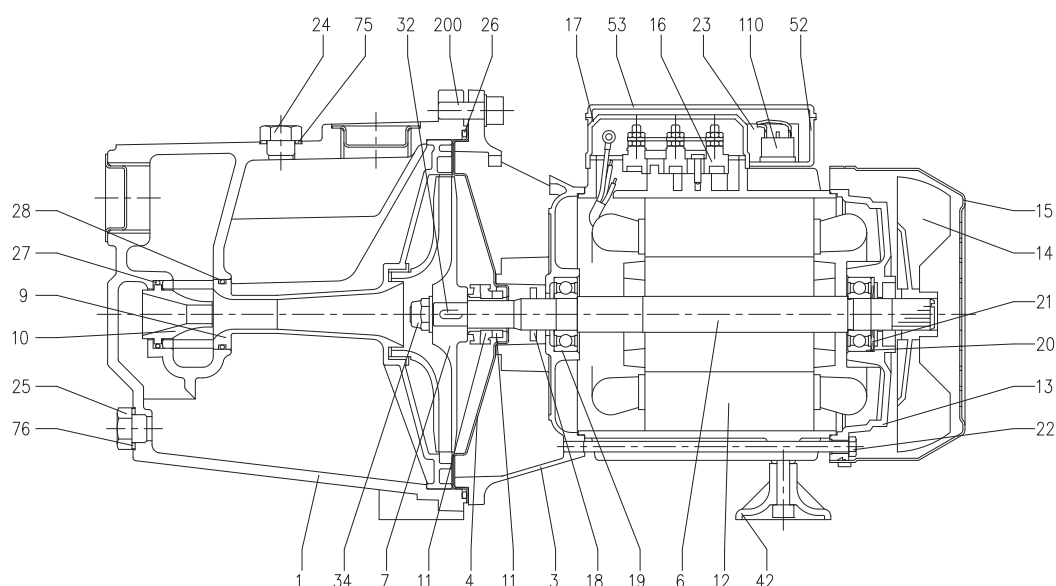

N°	PART NAME	MATERIAL	Q.TY	N°	PART NAME	MATERIAL	Q.TY
1	Casing	Cast iron	1	21	Adjusting ring	Steel C70	1
3	Motor bracket	[7]	1	22	Tie rod	Fe 42 Zincate	4
4	Casing cover [6]	AISI 304	1	23	Capacitor [2]	-	1
6	Shaft with rotor	AISI 303 (wet extension)	1	24	Priming plug	Brass	1
7	Impeller	[4]	1	25	Drain plug	Brass	1
9	Diffuser + Venturi tube	PPE+PS glass fibre reinforced	1	26	O-ring	NBR	1
10	Venturi nozzle	PPE+PS glass fibre reinforced	1	27	O-ring	NBR	1
11	Mechanical seal	Carbon/Ceramic/NBR	1	28	O-ring	NBR	1
12	Motor frame with stator	-	1	32	Key	AISI 316	1
13	Motor cover	Aluminium	1	34	Impeller nut [3]	AISI 304	1
14	Fan	PA6	1	42	Foot	PP	1
15	Fan cover	Fe P04 Zincate	1	52	Capacitor box [2]	ABS class V-0	1
16	Terminal board	-	1	53	Capacitor box cover [2] [8]	ABS class V-0	1
17	Terminal box cover [1]	Aluminium	1	75	Washer	Aluminium	1
18	Splash ring	NBR	1	76	Washer	Aluminium	1
19	Pump side ball bearing	-	1	110	Motor protector [5]	-	1
20	Fan side ball bearing	-	1	200	Screw	Zn Steel Cl. 8.8 ISO 898-1	4

[1] Only for three phase

[2] Only for single phase

[3] Only for Brass impeller version1

[4] Material : PPE+PS glass fibre reinforced for type : AGA 106

Brass for type : AGA 156 - AGA 206 - AGA 306

[5] Only for version single phase AGA 206

[6] Only for version AGA 106


[7] Material : Cast iron for version AGA 156 - AGA 206 - AGA 306

Aluminium for version AGA 106

[8] With gasket in NBR only for version single phase AGA 106


MECHANICAL SEAL

UP TO 0.75 kW

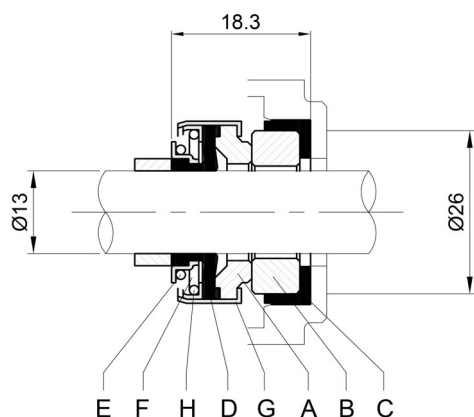

REF	PART NAME	MATERIAL
A	Rotary seal ring	Carbon graphite
B	Stationary seal ring	Ceramic
C	Gasket	NBR
D	Bellows	NBR
E	O-Ring	AISI 304
F	Self-driving spring	AISI 304
G	Frame	AISI 304
H	Retainer ring	AISI 304

1.1 kW AND ABOVE

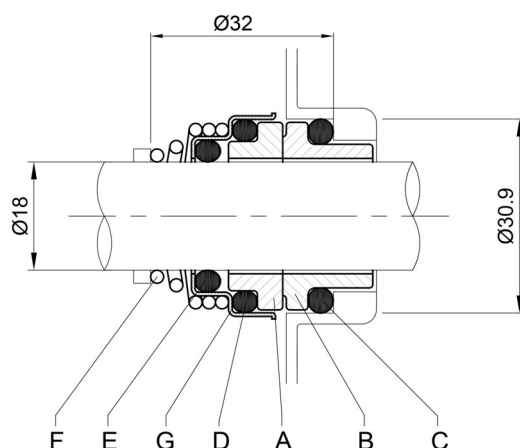


REF	PART NAME	MATERIAL
A	Rotary seal ring	Ceramic
B	Stationary seal ring	Carbon graphite
C	O-Ring	NBR
D	O-Ring	NBR
E	O-Ring	NBR
F	Self-driving spring	AISI 316
G	Frame	AISI 304

BEARINGS

Type pumps		Ball bearing	
Single Phase	Three Phase	Pump side	Fan side
-	AGA 106 T	6202	6202
-	AGA 156 T	6204	6203
AGA 206 M	AGA 206 T	6204	6203
-	AGA 306 T	6204	6203-ZZC3

PUMP

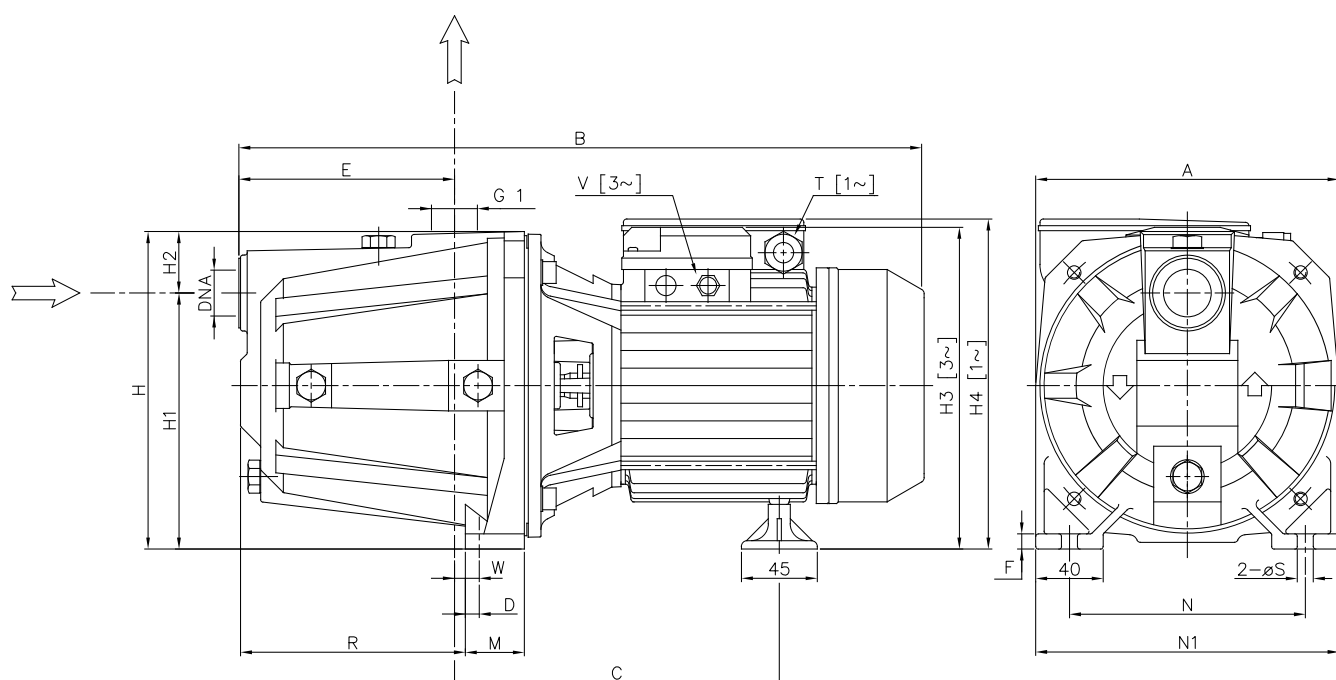


Pump type	Dimensions [mm]																				Weight [kgf]			
	A	B	C	D	E	F	H	H1	H2	[3~] H3	[1~] H4	M	N	N1	R	T [1~]	V [3~]	W	S	DNA	[1~]	[3~]		
AGA 106 T	180	405	195	10.3	127	9	185	152	33	197.5	-	40	140	180	128.5	-	M16x1.5	11.8	9.5	G 1	14	14		
AGA 156 T	220	520	244	10	157	10	223	170	53	229	-	48	175	220	167.5	-	M20x1.5	15.5	9	G 1 1/2	26	26		
AGA 206 M	220	521	244	10	157	10	223	170	53	-	247	48	175	220	167.5	PG13.5	-	15.5	9	G 1 1/2	27	-		
AGA 206 T	220	520	244	10	157	10	223	170	53	229	-	48	175	220	167.5	-	M20x1.5	15.5	9	G 1 1/2	29	29		
AGA 306 T	220	521	244	10	157	10	223	170	53	229	-	48	175	220	167.5	-	M20x1.5	15.5	9	G 1 1/2	29	29		

[1~] Single phase

[3~] Three phase

PACKING

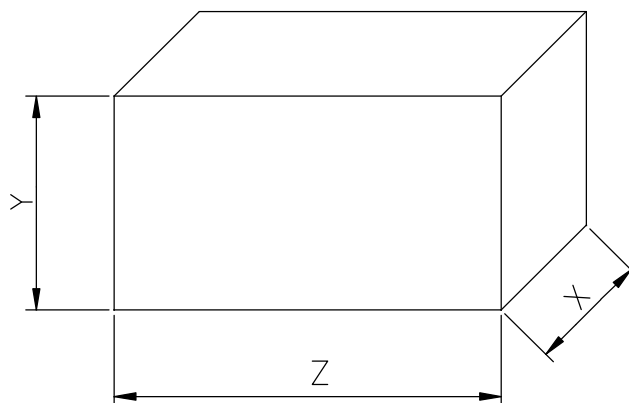

Type pumps		Packing [mm]				Weight [kgf]		
Single Phase	Three Phase	X	Y	Z		[1~]	[3~]	(*)
				[1~]	[3~]			
-	AGA 106 T	205	250	-	445	-	15	15
-	AGA 156 T	232	275	-	547	-	26	27
AGA 206 M	AGA 206 T	232	275	547	547	28	28	29
-	AGA 306 T	232	275	-	547	-	29	29

[1~] Single phase

[3~] Three phase

MOTOR DATA

Pump type	Power		Efficiency y	Capacitor		Efficiency (% load) and power factor				Input	Full load current		Locked rotor current	
	[kW]	[HP]		[μF]	[V]	η %			cos-φ		[A]		[A]	
						50%	75%	100%			110 V	220 V	110 V	220 V
Single Phase			[IE2 / IE3]							[kW]				
AGA 206 M	1,8	2,4	-	40	450	-	-	-	0,95	2,29	-	10,5	-	69,0

Pump type	Power		Efficiency (% load)			Efficiency (% load)			Input [kW]	Full load current			Locked rotor current		
			Three phase (380 V)			Three phase (460* V)				[A]			[A]		
	Three Phase	[kW]	[HP]	η %			η %			Three Phase	Three Phase				
			50%	75%	100%	50%	75%	100%	Three Phase	220 V	380 V	460* V	220 V	380 V	460* V
AGA 106 T	0.75	1,0	80.7	81.9	81.3	78.4	81.6	83.1	0.90	2.8	1.6	1.5	16.9	9.7	11.8
AGA 156 T	1.1	1.5	84.2	84.7	84.5	83.2	84.7	85.7	1.75	5.3	3.1	2.9	40.2	23.2	28.1
AGA 206 T	1.5	2,0	84.2	84.7	84.5	83.2	84.7	85.7	1.75	5.3	3.1	2.9	40.2	23.2	28.1
AGA 306 T	2.2	3,0	86.5	86.8	86.2	86.9	87.8	87.4	2.48	7.5	4.3	4.1	55.7	32.2	38.9



EBARA Pumps Europe S.p.A.

Via Torri di Confine 2/1 int. C
36053 Gambellara (Vicenza), Italy
Phone +39 0444 706811
ebarapumps.epe@ebaracom
www.ebaraeurope.com

EBARA Pumps Europe S.p.A. GERMANY

Elisabeth-Selbert-Straße 2
63110 Rodgau, Germany
Phone +49 (0) 6106-660 99-0
info.epde@ebaracom

EBARA Pumps South Africa (PTY) LTD

26 Kyalami Boulevard,
Kyalami Business Park, 1684, Midrand,
Gauteng, South Africa
Phone +27 11 466 1844
ebarae psa@ebaracom

EBARA Pumps Europe S.p.A. UK

Unit A, Park 34
Collett Way - Didcot
Oxfordshire - OX11 7WB, United Kingdom
Phone +44 1895 439027
marketing.epuk@ebaracom

EBARA Pumps Europe S.p.A. FRANCE

122, Rue Pasteur
69780 Toussieu, France
Phone: +33 04 72 76 94 82
mktg.epr@ebaracom

EBARA Pumps East Africa

Delta Corner Tower 2, 13th Floor, Office 1308,
Chiromo Road, Westlands
P.O. Box 13796-00800, Nairobi
Phone: +254(0)722913119
info.epea@ebaracom

EBARA POMPY POLSKA Sp. z o.o.

ul. Działkowa 115 A
02-234 Warszawa, Poland
Phone +48 22 3909920
marketing.epl@ebaracom

EBARA Pumps RUS Ltd.

Prospekt Andropov 18, building 7, floor 11
115432 Moscow
Phone +7 499 6830133
mktg.epr@ebaracom