




Japanese Technology since 1912

MD

Data Book 50Hz

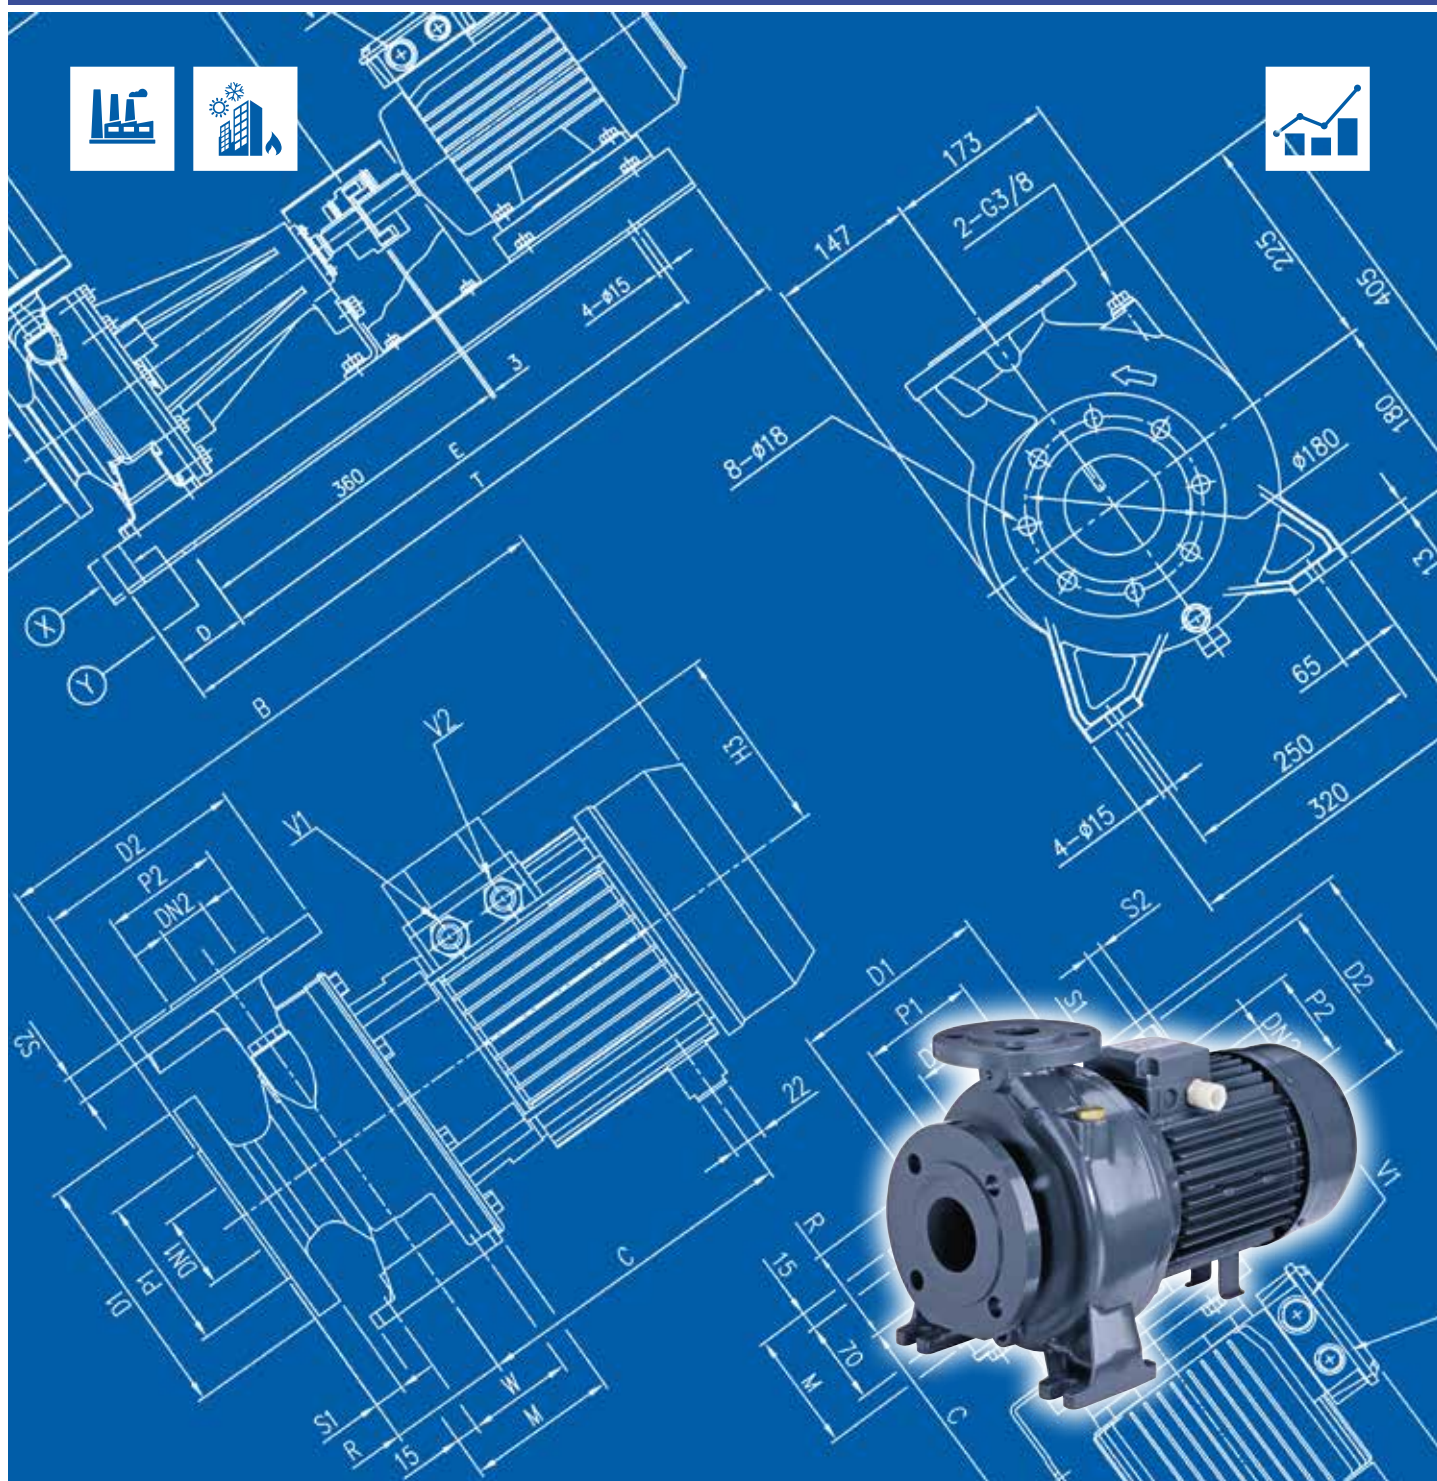

	Page
- SPECIFICATIONS	200
SELECTION CHART	201
SELECTION CHART TABLE	202
TYPE KEY AND CURVE SPECIFICATIONS	203
PERFORMANCE CURVE MD 32-250/5.5	205
PERFORMANCE CURVE MD 32-250/7.5	205
PERFORMANCE CURVE MD 32-250/9.2	205
PERFORMANCE CURVE MD 32-250/11	205
PERFORMANCE CURVE MD 40-250/11	206
PERFORMANCE CURVE MD 40-250/15	206
PERFORMANCE CURVE MD 50-250/15	207
PERFORMANCE CURVE MD 50-250/18.5	207
PERFORMANCE CURVE MD 50-250/22	207
- CONSTRUCTIONS	300
SECTIONAL VIEW DRAWING	300
SECTIONAL VIEW TABLE	301
BEARINGS	302
MECHANICAL SEAL	303
FLUID TEMPERATURE RANGE	304
FITTINGS	305
- DIMENSIONS AND WEIGHT	400
PUMP MD 32-250 / 40-250	400
PUMP MD 40-250 / 50-250	401
PACKING	402
- TECHNICAL DATA	500
MOTOR DATA	500
NOISE DATA	501

SPECIFICATIONS

50Hz


Rev. S

PUMP		
Liquid Handled	Type of liquid	Clean water
	Temperature [°C]	min. -5 max. +120 For full details see section "FLUID TEMPERATURE RANGE"
Maximum working pressure [MPa]		1
Flange		UNI 2236
Counterflange (On request)		UNI 2247
Construction	Impeller	Closed centrifugal type
	Shaft seal type	Mechanical seal
	Bearing	Sealed ball bearing
Pipe Connection	Suction	Flange to DIN 2532 (50 mm - 65 mm)
	Discharge	Flange to DIN 2532 (32 mm - 40 mm - 50 mm)
Material	Casing	Cast iron
	Impeller	AISI 304
	Shaft seal	Ceramic/Carbon/NBR
	Shaft	AISI 304 (wet extension)
	Bracket	Cast iron
Applicable standard of test		ISO 9906:2012 – Grade 3B
MOTOR		
Type	Electric – TEFC	
	Three Phase	
Efficiency level (Reg. 640/2009)		IE3
No. of Poles		2
Rotation speed [min-1]		≈2900
Insulation Class		F
Protection degree (CEI EN 60034-5)		IP 55
Power rating [kW]	5.5 ÷ 22	
	[HP]	
Frequency [Hz]	50	
	Voltage [V]	
Over load protection		400/690 ±10%
Casing material		Provided by the user
Base material/motor support		Aluminium
Dimensions of cable entry		Aluminium / Steel
		PG 13.5 - PG 16 - PG 21 (see dimensions pages 400-401)

SELECTION CHART

50Hz

Rev. S

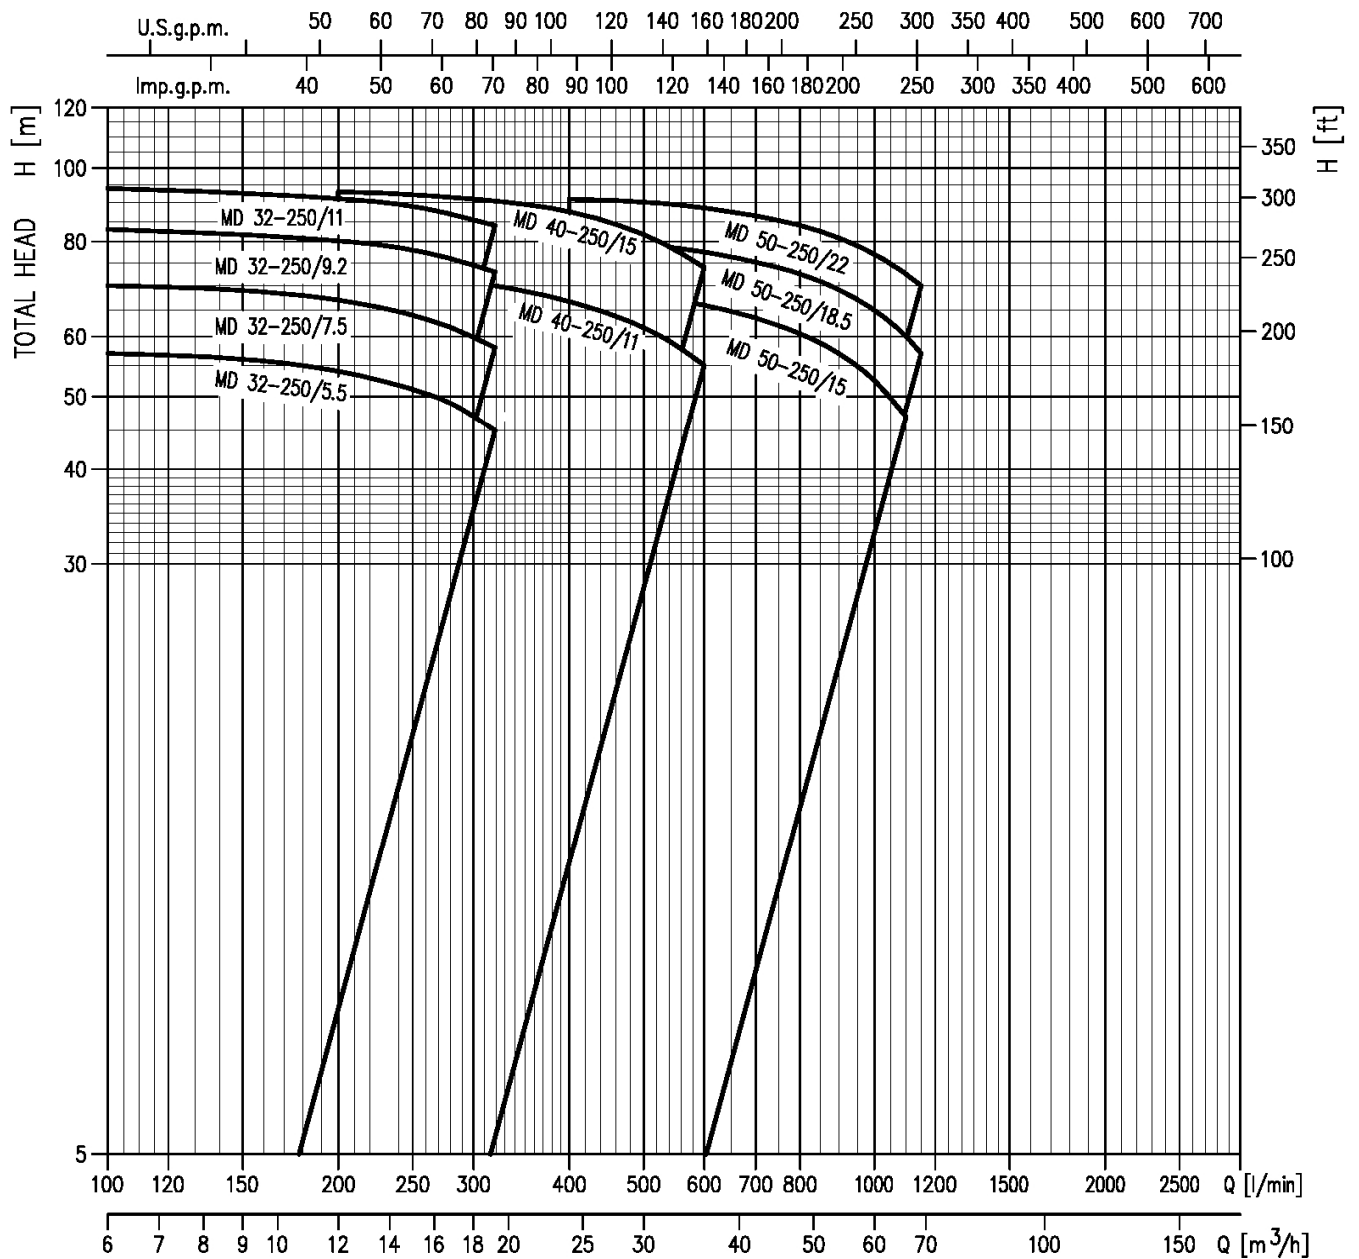

SELECTION CHART TABLE

50Hz

Rev. S


Pump Type	Power		Q=Capacity																	
			l/min	0	100	200	250	280	320	400	550	600	667	700	800	1000	1100	1150	1200	1300
	[kW]	[HP]	m³/h	0	6	12	15	17	19	24	33	36	40	42	48	60	66	69	72	78
	H=Total manometric head in meters																			
MD 32-250/5.5	5,5	7,5	58	56,5	53	50,4	48,6	45,7	38	-	-	-	-	-	-	-	-	-	-	
MD 32-250/7.5	7,5	10	71,5	70	67,1	64,5	62,7	60	53	-	-	-	-	-	-	-	-	-	-	
MD 32-250/9.2	9,2	12,5	82,5	81,2	78,2	75,8	74	71,4	65	-	-	-	-	-	-	-	-	-	-	
MD 32-250/11	11	15	91	89	86	84	82	79	73	-	-	-	-	-	-	-	-	-	-	
MD 40-250/11	11	15	75	-	74	73	72,2	71	68,2	60,1	56,3	49,8	46	-	-	-	-	-	-	
MD 40-250/15	15	20	93,8	-	92,7	92,1	91,7	90,8	88,1	81,2	78	72,9	70	-	-	-	-	-	-	
MD 50-250/15	15	20	72,8	-	-	-	-	-	71,2	69,2	68,2	66,6	65,7	62,6	54,2	49	46,1	43	-	
MD 50-250/18.5	18,5	25	82,8	-	-	-	-	-	81,5	79,5	78,5	77	76,1	73,2	66	61,4	58,9	56,1	50	
MD 50-250/22	22	30	93	-	-	-	-	-	91,6	89,7	88,9	87,6	86,9	84,3	77,4	73	70,4	67,7	61,5	

TYPE KEY AND CURVE SPECIFICATIONS

50Hz

Rev. S

TYPE KEY:

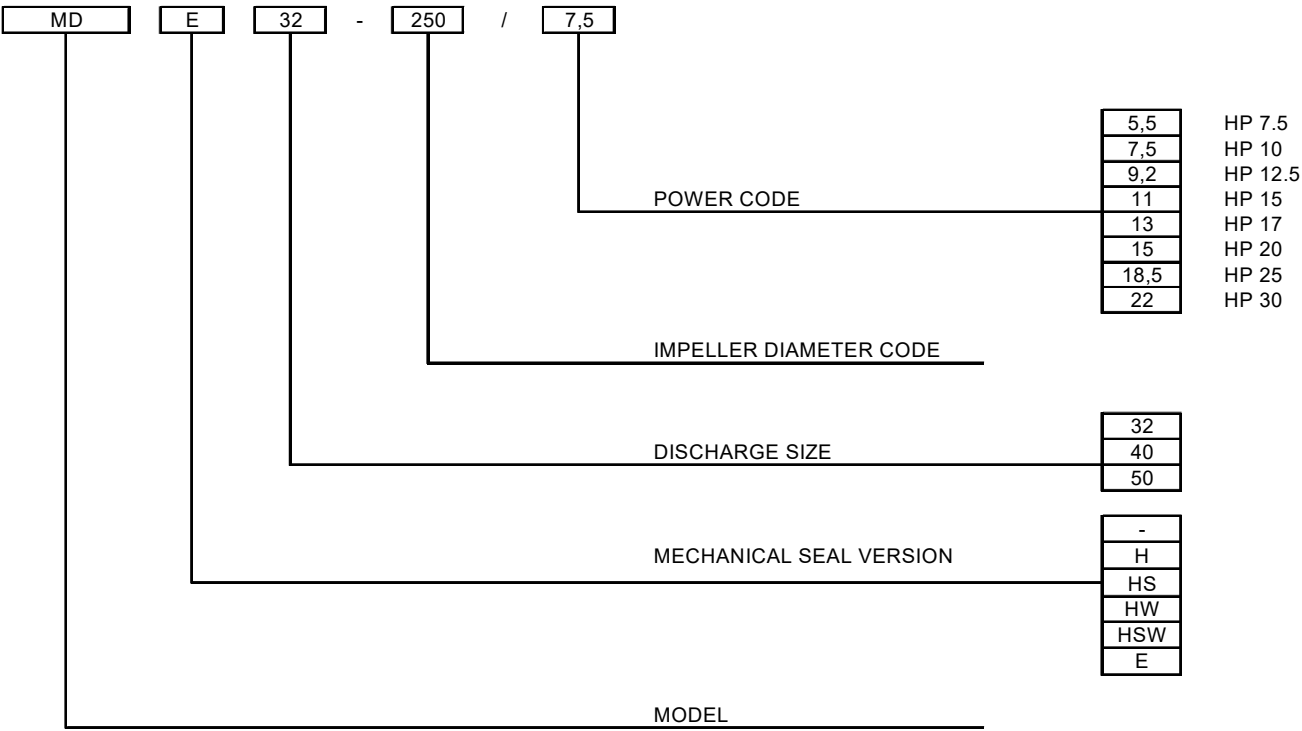

CURVE SPECIFICATIONS

The specifications below qualify the curves shown on the following pages.

Tolerances according to ISO 9906:2012 - Grade 3B

The curves refer to effective speed of asynchronous motors at 50 Hz

Measurements were carried out with clean water at 20°C of temperature and with a kinematic viscosity of $\nu = 1 \text{ mm}^2/\text{s}$ (1 cSt)

The NPSH curve is an average curve obtained in the same conditions of performance curves.

The continuous curves indicate the recommended working range. The dotted curve is only a guide.

In order to avoid the risk of over-heating, the pumps should not be used at a flow rate below 10% of best efficiency point.

Symbols explanation:


- Q = volume flow rate
- H = total head
- P_2 = pump power input (shaft power)
- η = pump efficiency
- NPSH = net positive suction head required by the pump
- MEI = minimum efficiency index

The minimum efficiency index (MEI) is a measure of the quality of a pump size in respect to its mean efficiency. The minimum efficiency index is based on the hydraulic efficiency and on the head at the best efficiency point.


The efficiency of a pump with trimmed impeller is usually lower than that of a pump with the full impeller diameter. The trimming of the impeller will adapt the pump to a fixed duty point, leading to reduced energy consumption. The minimum efficiency index (MEI) is based on the full impeller diameter.

The operation of these water pumps with variable duty points may be more efficient and economic when controlled, for example, by the use of a variable speed drive that matches the pump duty to the system.

MEI = 0.4 for Multistage Vertical 2900rpm

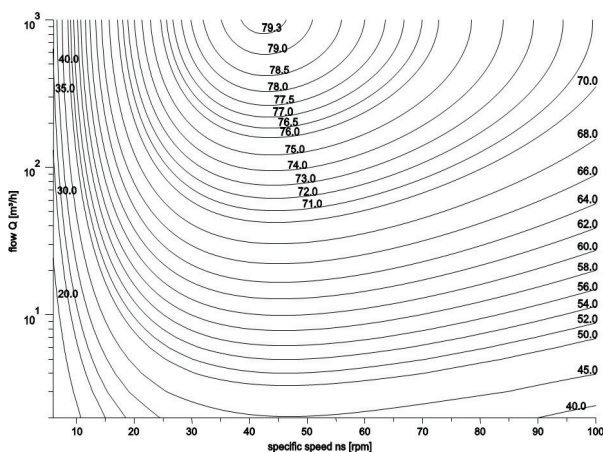

MEI=0.7 for Multistage Vertical 2900 rpm

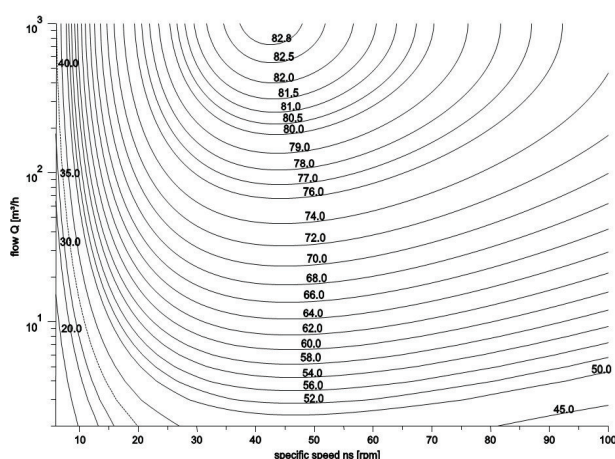


MD 32-250/5.5 (5.5 kW) – Impeller diameter = 218 mm

MD 32-250/7.5 (7.5 kW) – Impeller diameter = 240 mm

MD 32-250/9.2 (9.2 kW) – Impeller diameter = 254 mm

MD 32-250/11 (11 kW) – Impeller diameter = 265 mm

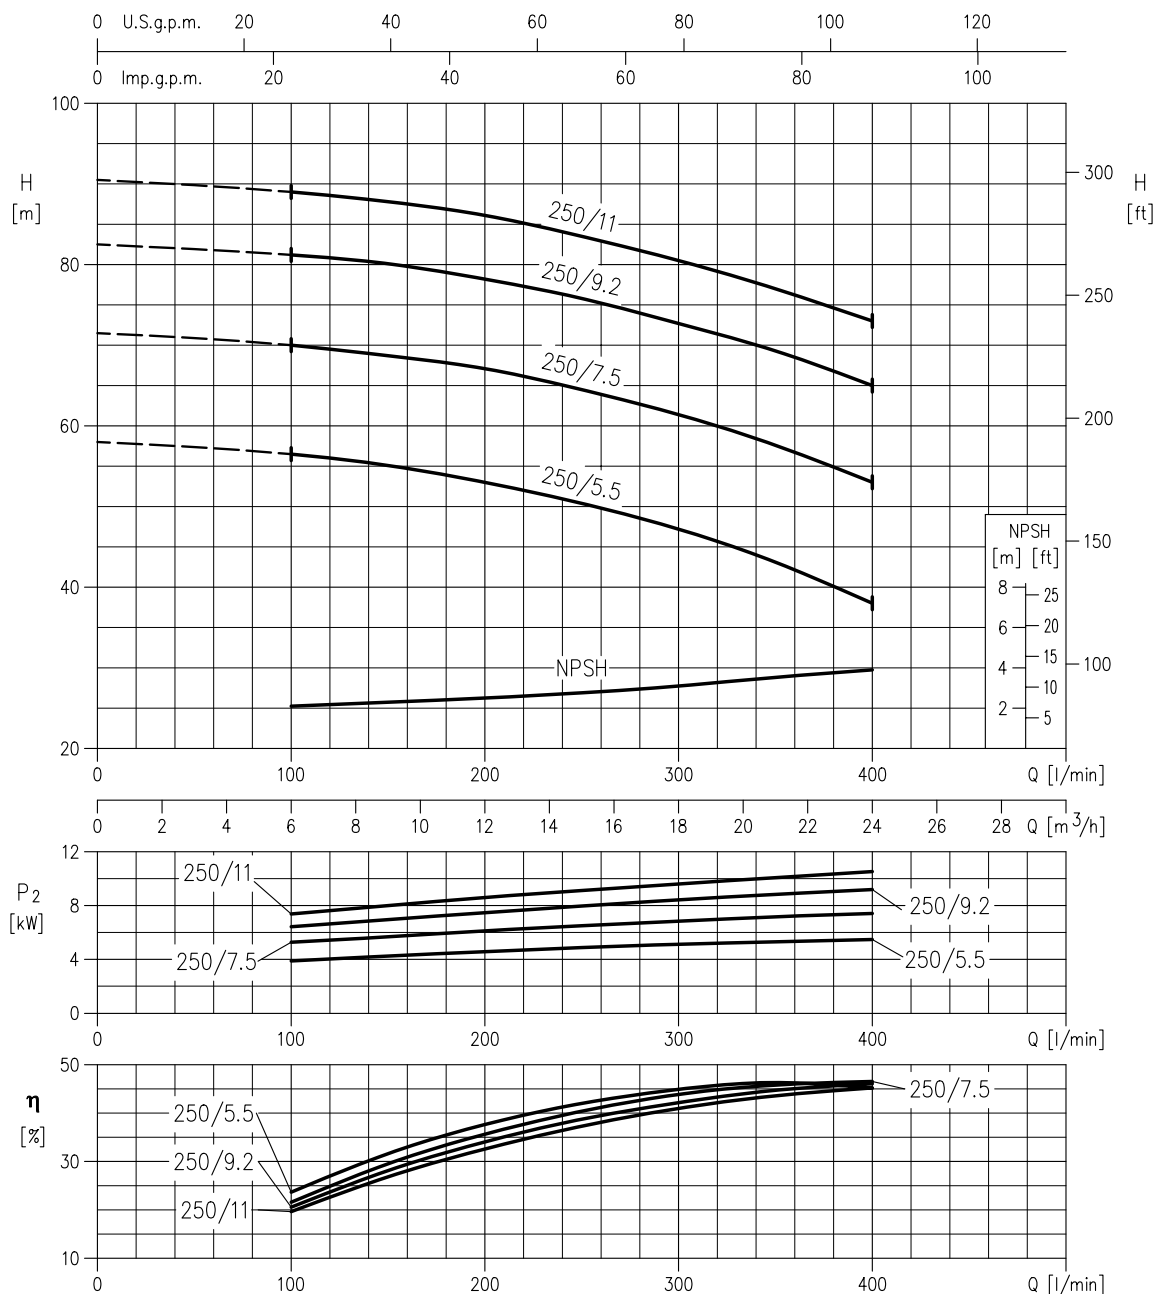

PRODUCT NOT AVAILABLE FOR THE EUROPEAN MARKET

Rotation speed $\approx 2900 \text{ min}^{-1}$

Test standard: ISO 9906:2012 - Grade 3B


PERFORMANCE CURVE

50Hz

Rev. S


MD 40-250/11 (11 kW) MEI > 0.60 – Impeller diameter = 236 mm

MD 40-250/15 (15 kW) MEI > 0.60 – Impeller diameter = 259 mm

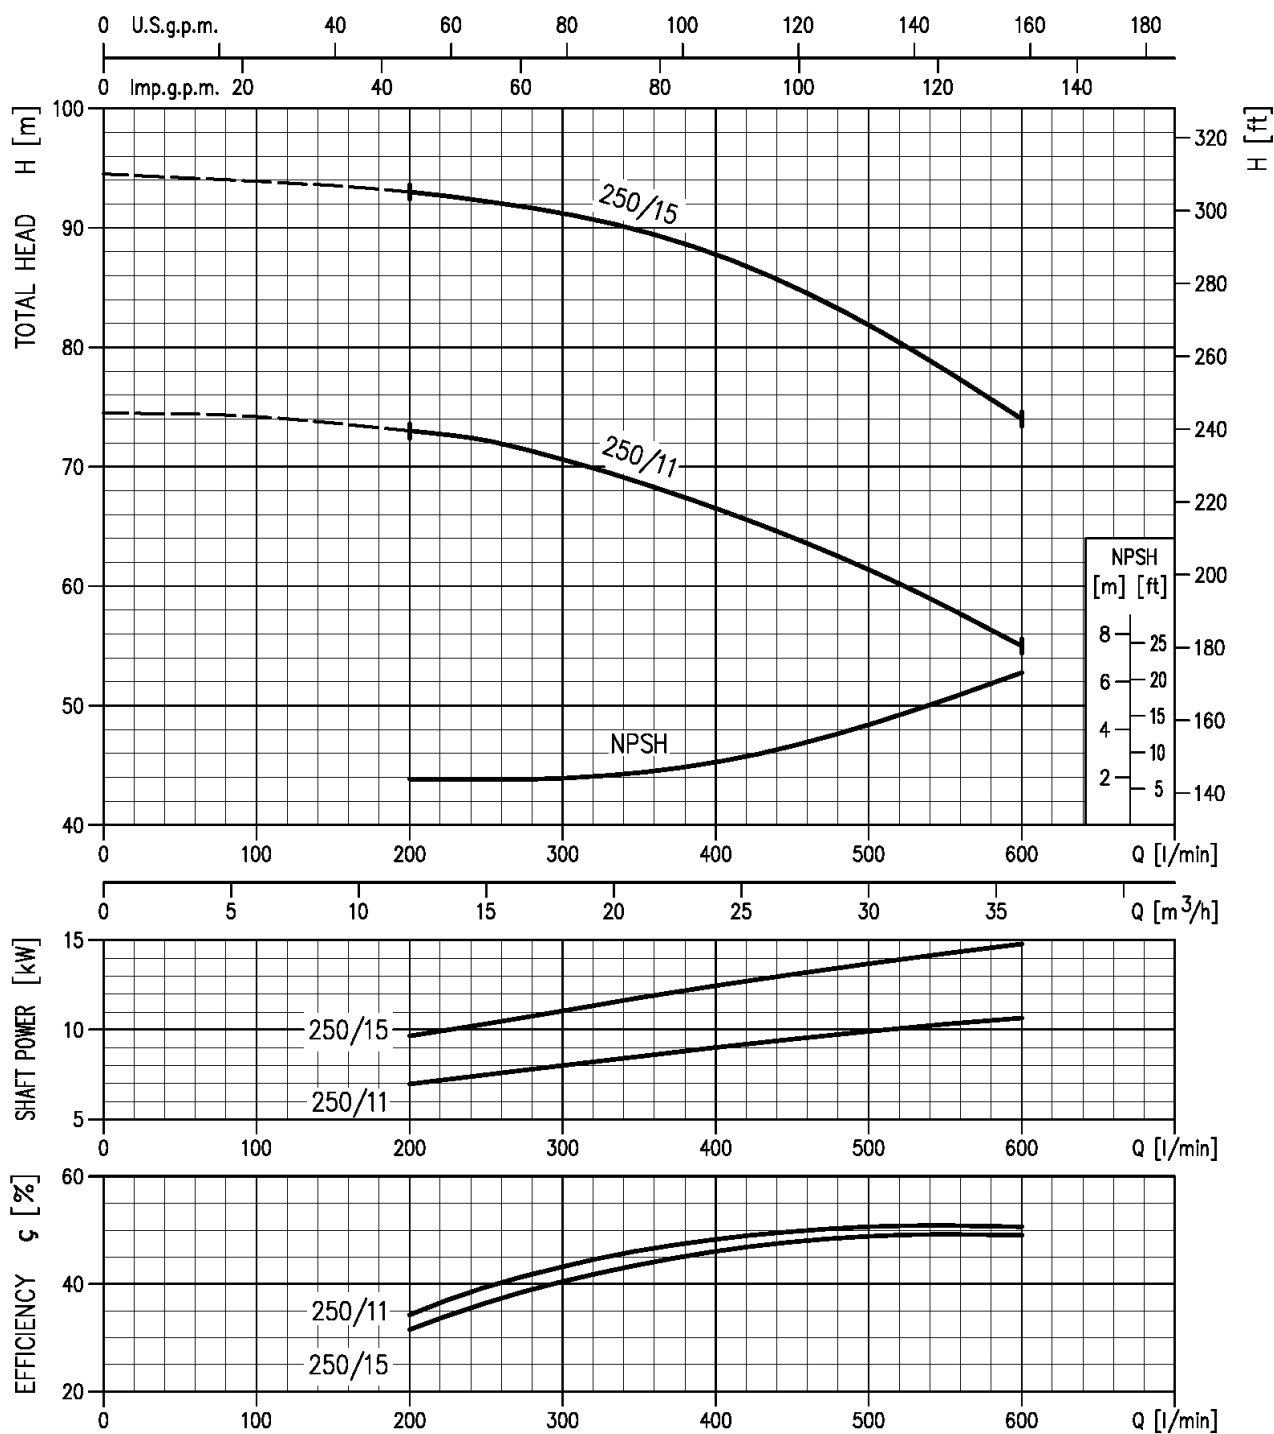Rotation speed $\approx 2900 \text{ min}^{-1}$

Test standard: ISO 9906:2012 - Grade 3B


MD 50-250/15 (15 kW) MEI > 0.40 – Impeller diameter = 234 mm
 MD 50-250/18.5 (18.5 kW) MEI > 0.40 – Impeller diameter = 248 mm
 MD 50-250/22 (22 kW) MEI > 0.40 – Impeller diameter = 261 mm

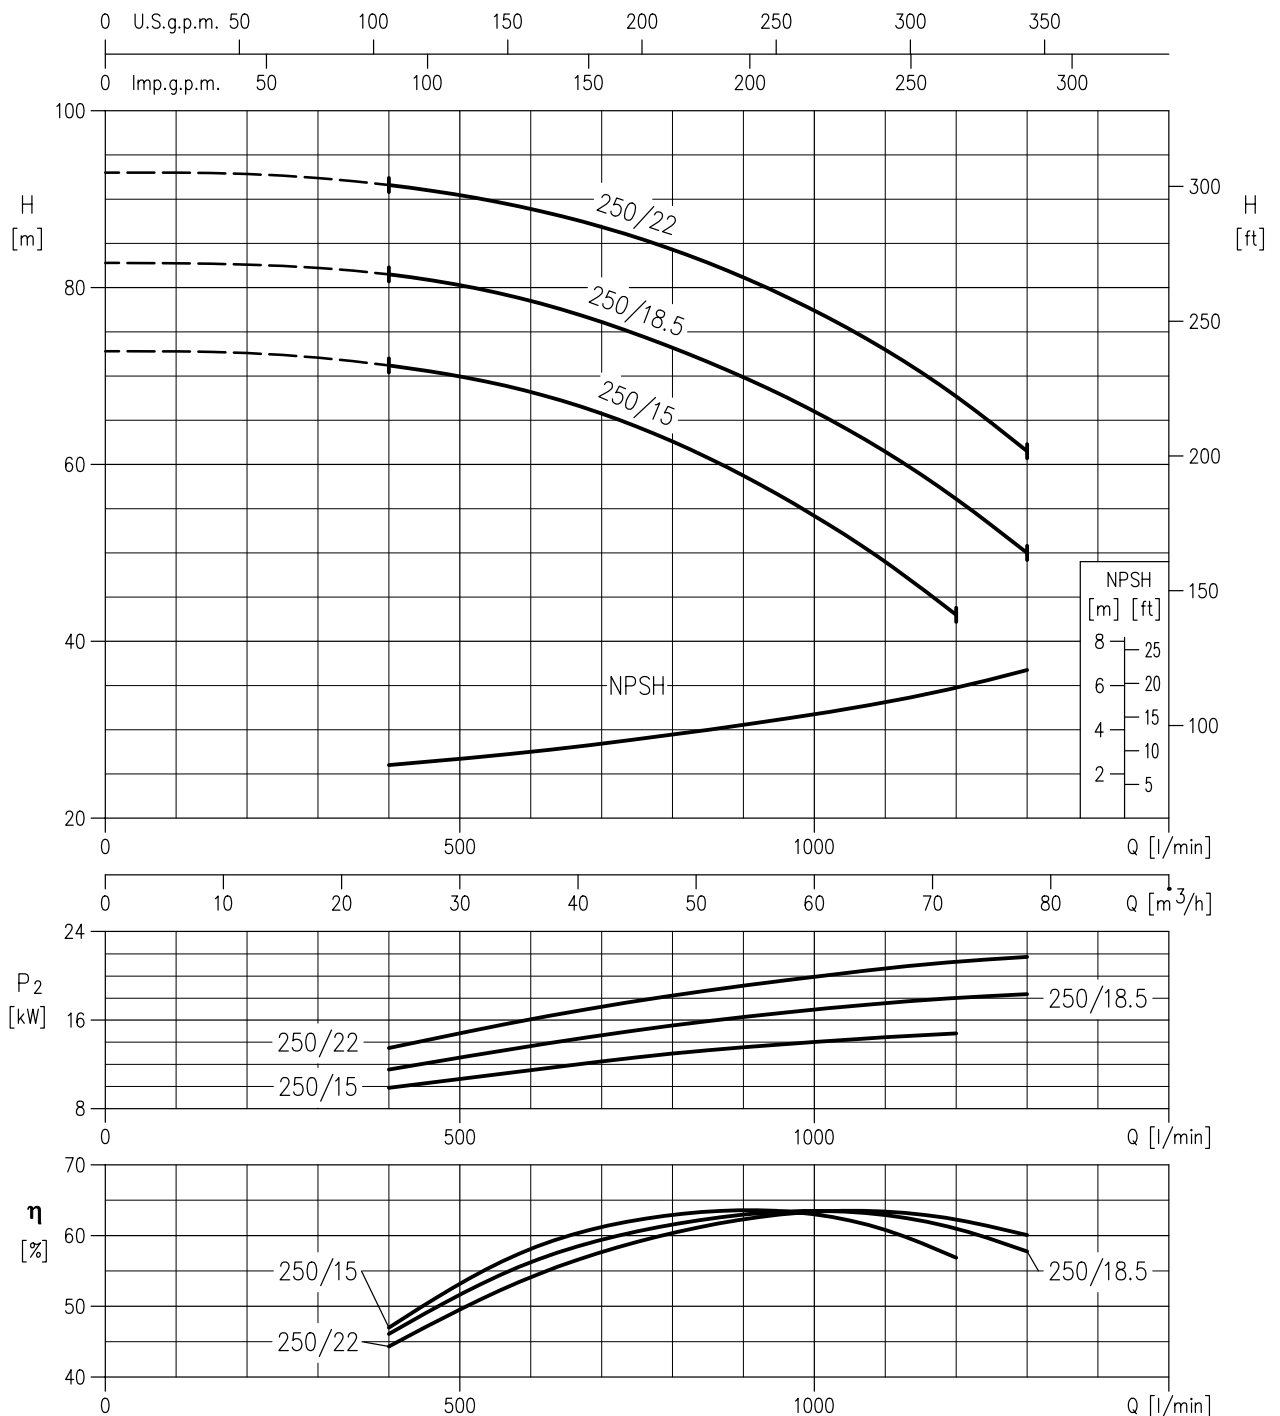


Rotation speed ≈ 2900 min⁻¹
 Test standard: ISO 9906:2012 - Grade 3B

SECTIONAL VIEW DRAWING

UP TO 13 kW

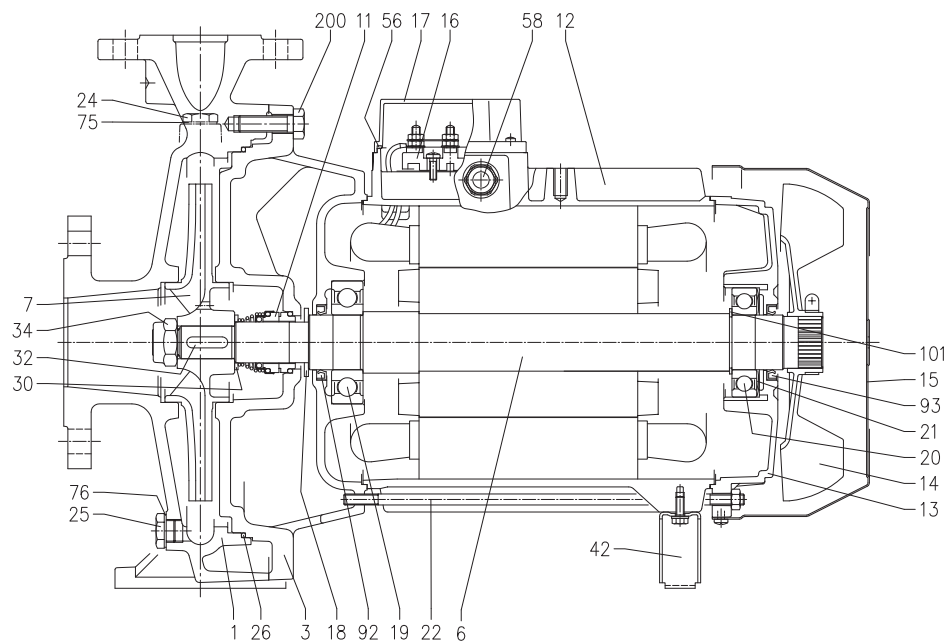

15 kW AND ABOVE

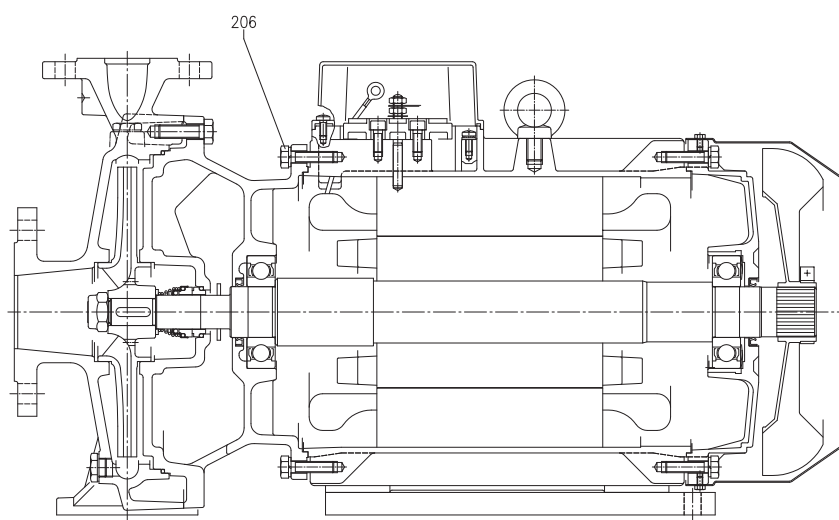

SECTIONAL VIEW TABLE

N°	PART NAME		MATERIAL	DIMENSIONS	STANDARD	FOR 1 UNI
1	Casing		Cast iron EN-GJL-200-EN 1561			1
3	Motor bracket		Cast iron EN-GJL-200-EN 1561			1
6	Shaft with rotor		AISI 304 (Part in contact with liquid)			1
7	Impeller		AISI 304			1
11	Mechanical seal [1]		Carbon/Ceramic/NBR			1
12	Motor frame with stator		-			1
13	Motor cover		Aluminium			1
14	Fan		PP			1
15	Fan cover		Fe P04 Galvanized			1
16	Terminal box		-			1
17	Terminal box cover		Aluminium			1
18	Splash ring	Up to 7.5 kW	NBR	40x21.5x3	EPE DRAWING	1
		9.2 kW and above		50x29.5x3		
19	Pump side ball bearing		-	See table p.302		1
20	Fan side ball bearing		-	See table p.302		1
21	Adjusting ring		Steel C70			1
22	Tie rod	Up to 11 Kw	Fe 42 Galvanized		EPE DRAWING	4
		15kW and above	Gv. steel 8.8 strenght class ISO 898/1		UNI 5739	
24	Priming plug		Brass		EPE DRAWING	1
25	Drain plug		Brass		EPE DRAWING	1
26	O-ring		NBR [2]	277x3.53	EPE DRAWING	1
30	Spacer		AISI 304	22,5x26,9x2,5 (up to 7,5kW)	EPE DRAWING	1
				30,5x40x2,5 (9,2 kW and above)		
32	Key		AISI 316	6x6x25 (up to 7,5kW)	UNI 6604	1
				8x7x30 (9,2 kW and above)		
34	Impeller nut		AISI 304	M16x1,5 (up to 7,5kW)	UNI 7474	1
				M20x1,5 (9,2 kW and above)		
42	Foot		Fe P04		EPE DRAWING	1
56	Box gasket		NBR			1
58	Cable entry		-			1
75	Washer		Aluminium	Ø 17 - G3/8		1
76	Washer		Aluminium	Ø 17 - G3/8		1
85*	Kit counterflange	Flange	Galvanized steel	See table p.304	EPE DRAWING	2
		Screw for flange	AISI 304	M16x55	UNI 5737	8
		Gasket	EPDM	See table p.304		2
92	Lip seal	Up to 7,5 kW	-	30x47x7	DIN 3760 without spring	1
		From 9,2 to 11 kW		40x55x7		
		From 15 to 22 kW		45x60x7		
93	Lip seal	Up to 7,5 kW	-	30x47x7	DIN 3760 without spring	1
		From 9,2 to 11 kW		40x55x7		
		From 15 to 22 kW		45x60x7		
101	Snap ring (only for 9,2-11 kW)		Carbon tool steels TC 80	Ø 40	UNI 7435	1
200	Screw		Gv. steel 8.8 strenght class ISO 898/1	M12x40	UNI 5739	12
206	Screw		Gv. steel 8.8 strenght class ISO 898/1	M10x40	UNI 5739	4


[1] See constructions mechanical seal p. 303 *On request

[2] FPM for H-HS-HW-HSW version
EPDM for E version

BEARINGS

Pump type	Ball Bearing	
	Pump side	Fan side
MD 32-250/5.5	6306 2RS1	6206 2RS1
MD 32-250/7.5		
MD 32-250/9.2	6308 2RS1	6208 2RS1
MD 32-250/11		
MD 40-250/11	6308 2RS1	6208 2RS1
MD 40-250/15	6309 2RS1	6309 2RS1
MD 50-250/15	6309 2RS1	6309 2RS1
MD 50-250/18,5		
MD 50-250/22		

MECHANICAL SEAL

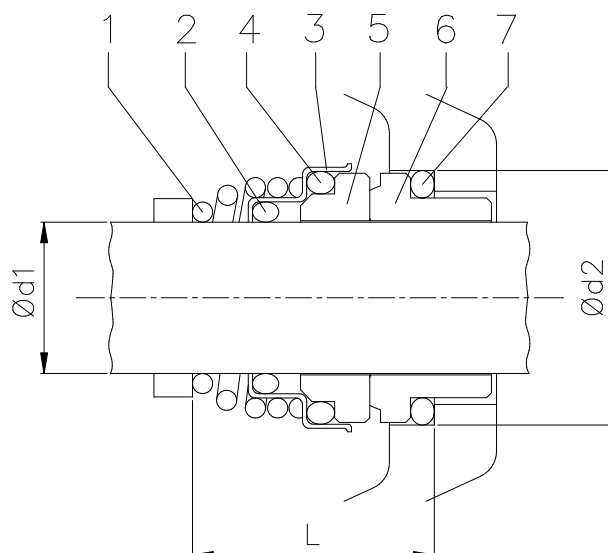

Pump type	Dimensions mm		
	Ø d1	Ø d2	L
MD 32-250/5.5	22	37	37,5
MD 32-250/7.5			
MD 32-250/9.2	30	45	42,5
MD 32-250/11			
MD 40-250/11	30	45	42,5
MD 40-250/15			
MD 50-250/15	30	45	42,5
MD 50-250/18,5			
MD 50-250/22			

REF	PART NAME	MATERIAL					
		Standard version	H	HS	Optional HW	HSW	E
1	Self driving spring	AISI 316	AISI 316	AISI 316	AISI 316	AISI 316	AISI 316
2	O Ring	NBR	FPM	FPM	FPM	FPM	EPDM
3	Frame	AISI 304	AISI 304/AISI 316*	AISI 316	AISI 316	AISI 316	AISI 304
4	O Ring	NBR	FPM	FPM	FPM	FPM	EPDM
5	Rotary seal ring	Ceramic	Ceramic	SiC	Tung. carbide	SiC	Ceramic
6	Stationary seal ring	Carbon graphite	Carbon graphite	SiC	Tung. carbide	Tung. carbide	Carbon graphite
7	O Ring	NBR	FPM	FPM	FPM	FPM	EPDM

* Only for Ø 30

FLUID TEMPERATURE RANGE

The maximum allowable temperature for the pumped fluid is a determining factor for the operational life of the pump. A primary role in this limitation is played by the materials of the mechanical seals (rings and elastomers), whose thermal resistance often defines the upper limit. The general construction materials of the pump (casing, impeller) and the lubricant used also contribute to defining the maximum temperature. Although the fluid properties and operating conditions have an impact, the choice of suitable seal materials for the operating temperature is crucial to prevent leaks and ensure the reliability of the pumping system.

To preserve optimal performance and prevent failures, we recommend to operate within the following limits:


STANDARD mechanical seal	TEMPERATURE	
	MIN	MAX
STANDARD	-5 °C	90 °C

OPTIONAL mechanical seal	TEMPERATURE	
	MIN	MAX
H *	-5 °C	110 °C
HS *	-5 °C	110 °C
HW *	-5 °C	110 °C
HSW *	-5 °C	110 °C
E	-5 °C	120 °C

* in case the pumped fluid is water in combination to FPM elastomers, a maximum temperature fluid of 75°C is recommended in order to guarantee a longer life of the sealing parts


FITTINGS

ZINKED STEEL COUNTER FLANGE (STANDARD)

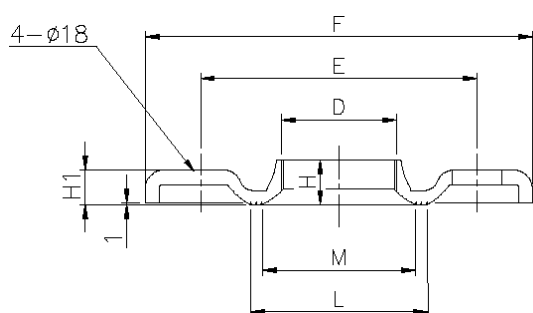


DIN	D	E	F	H	H1	L	M
32	G 1 1/4	100	140	15	11.5	67	50
40	G 1 1/2	110	150	17.5	11.5	72	58
50	G 2	125	165	19	15	89	70
65	G 2 1/2	145	185	23	14	104	88

AISI 304-AISI 316L COUNTER FLANGE (ON REQUEST)

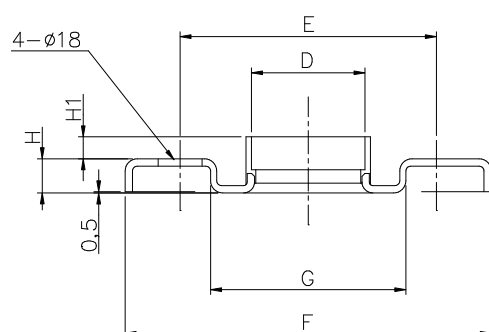

DIN	D	E	F	G	H	H1
32	G 1 1/4	100	140	76	14	15.5
40	G 1 1/2	110	150	81	14	15.5
50	G 2	125	165	96	16	18
65	G 2 1/2	145	185	116	16	24


GASKET

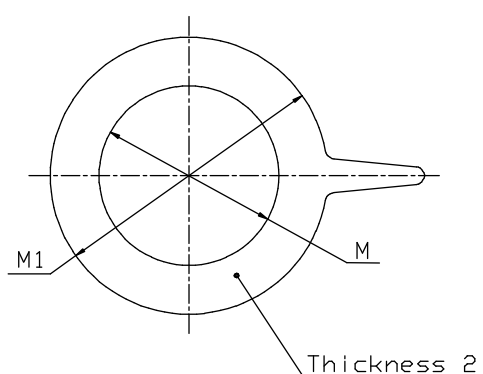

DIN	M	M1
32	38	82
40	50	93
50	60	107
65	80	125

Material : EPDM version for standard
FPM version for hot water maximum 110°C

PUMP MD 32-250 / 40-250

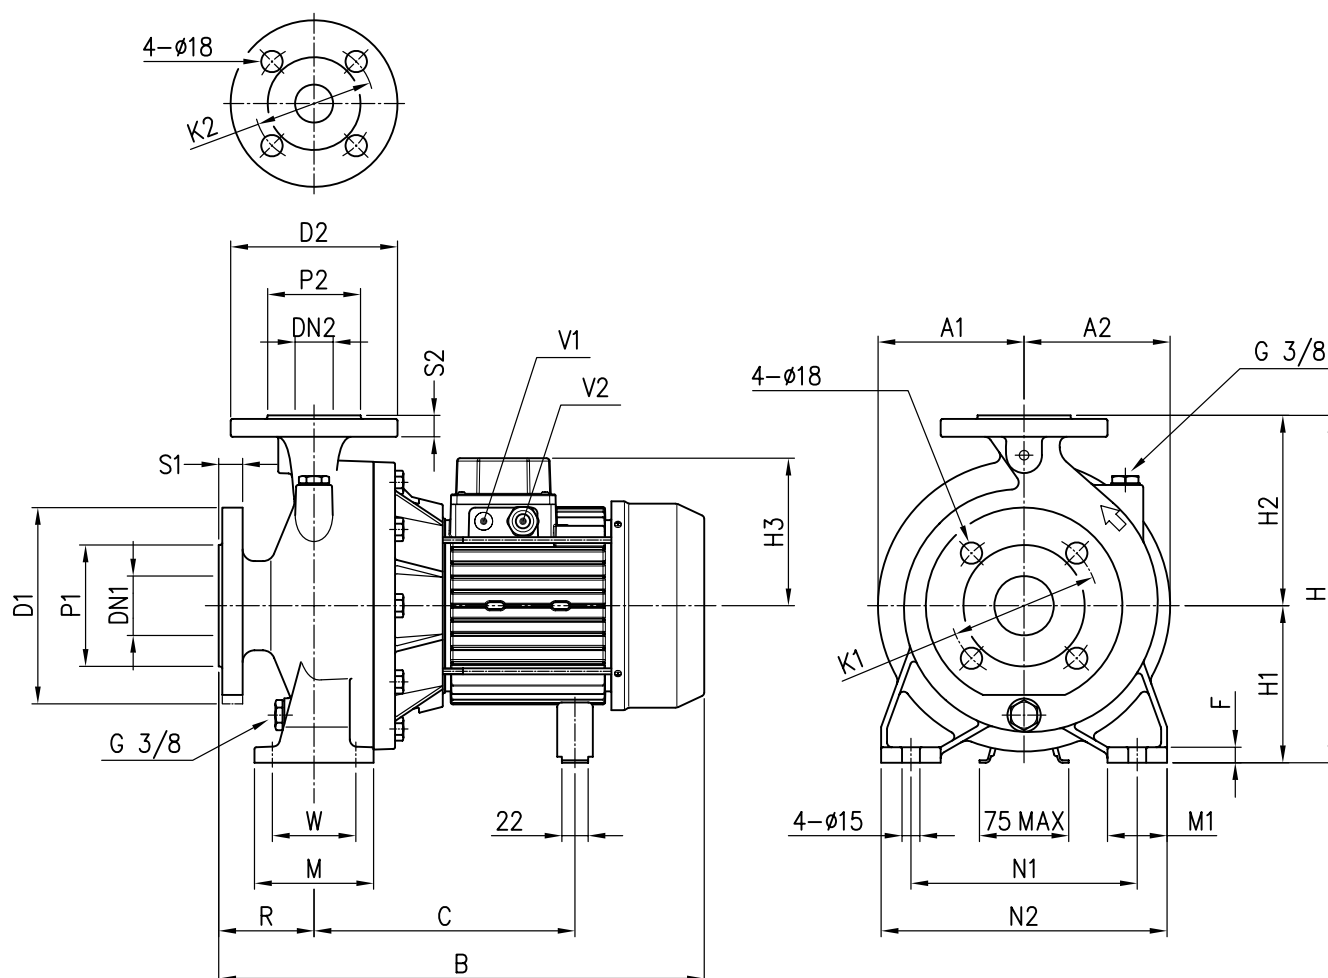


Model	Dimensions (mm)																										Weight [kgf]			
	Ø DN1	Ø P1	Ø K1	Ø D1		Ø DN2	Ø P2	Ø K2	Ø D2	S2	H	H1	H2	H3	R	W	M	M1	N1	N2	A1	A2		B (*)	C	F	V1	V2		(*)
MD 32-250/5.5	50	102	125	165	20	32	78	100	140	18	405	180	225	150	100	95	125	65	250	320	176	176	539	539	275	15	PG 13.5	PG 16	74,2	74,2
MD 32-250/7.5	50	102	125	165	20	32	78	100	140	18	405	180	225	150	100	95	125	65	250	320	176	176	537	557	275	15	PG 13.5	PG 16	74,6	77,7
MD 32-250/9.2	50	102	125	165	20	32	78	100	140	18	405	180	225	178	100	95	125	65	250	320	176	176	589	589	354	15	PG 13.5	PG 21	94,5	94,5
MD 32-250/11	50	102	125	165	20	32	78	100	140	18	405	180	225	178	100	95	125	65	250	320	176	176	589	589	354	15	PG 13.5	PG 21	95	97,4
MD 40-250/11	65	122	145	185	20	40	88	110	150	18	405	180	225	178	100	95	125	65	250	320	176	176	589	589	354	15	PG 13.5	PG 21	98	100,4

(*) Only for IE3 Motors



50Hz

PUMP MD 40-250 / 50-250

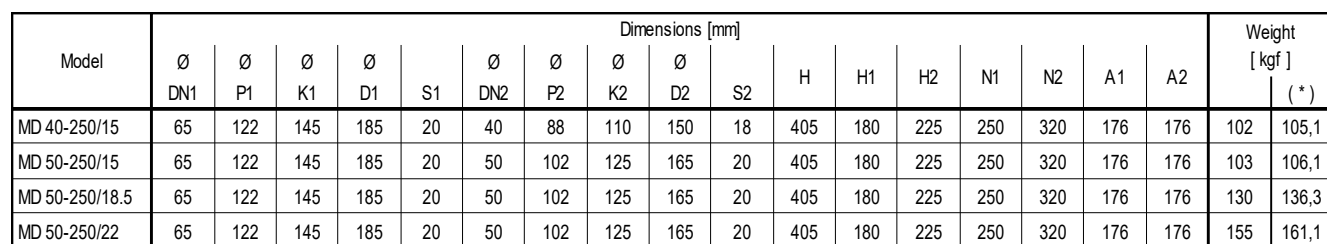

401

PACKING

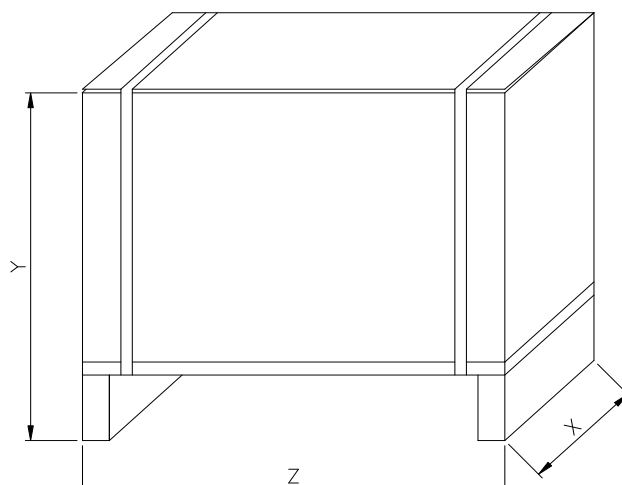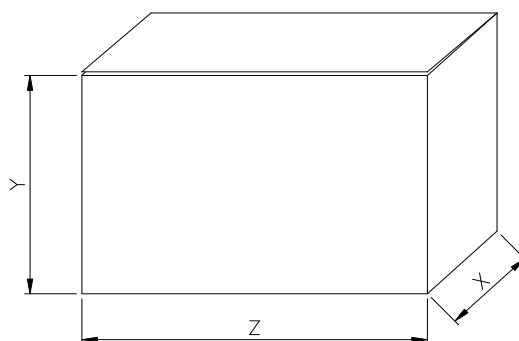

Pump type	Packing [mm]			Weight [kgf]
	X	Y	Z	
MD 32-250/5.5	375	560	585	80
MD 32-250/7.5	375	560	585	83
MD 32-250/9.2	375	560	585	102
MD 32-250/11	375	560	585	106
MD 40-250/11	375	560	685	113
MD 40-250/15	375	615	865	116
MD 50-250/15	375	615	865	114
MD 50-250/18.5	375	615	865	146
MD 50-250/22	375	615	865	168

MOTOR DATA

Pump type	Power		Efficiency	Efficiency (% load)			Input [kW]	Full load current [A]		Locked rotor current [A]	
	[kW]	[HP]		50%	η % 75%	100%		400 V	690 V	400 V	690 V
MD 32-250/5.5	5,5	7,5	IE2	82,9	86,0	87,4	6,29	10,4	6,0	116,0	67,0
MD 32-250/7.5	7,5	10	IE2	86,1	88,2	88,8	8,45	13,7	7,9	140,0	81,0
MD 32-250/9.2	9,2	12,5	IE2	88,6	90,0	89,9	10,23	16,8	9,7	166,0	96,0
MD 32-250/11	11	15	IE2	88,9	90,3	90,2	12,20	21,9	12,7	186,0	108,0
MD 40-250/11	11	15	IE2	88,9	90,3	90,2	12,20	21,9	12,7	186,0	108,0
MD 40-250/15	15	20	IE2	89,3	91,0	91,1	18,00	30,0	17,3	246,0	143,0
MD 50-250/15	15	20	IE2	89,3	91,0	91,1	18,00	30,0	17,3	246,0	143,0
MD 50-250/18.5	18,5	25	IE2	89,8	91,2	91,7	20,17	36,3	21,0	325,0	188,0
MD 50-250/22	22	30	IE2	89,9	91,9	92,4	23,80	40,8	23,6	383,0	222,0
MD 32-250/5.5	5,5	7,5	IE2	82,9	86,0	87,4	6,29	10,4	6,0	116,0	67,0
MD 32-250/7.5	7,5	10	IE3	89,0	90,7	90,8	8,26	13,6	7,9	144,0	83,0
MD 32-250/9.2	9,2	12,5	IE3	90,1	90,8	90,9	10,12	17,2	10,0	166,0	96,0
MD 32-250/11	11	15	IE3	90,4	91,2	91,8	11,98	21,3	12,3	184,0	107,0
MD 40-250/11	11	15	IE3	90,4	91,2	91,8	11,98	21,3	12,3	184,0	107,0
MD 40-250/15	15	20	IE3	91,2	92,0	91,9	16,32	27,7	17,3	225,0	130,0
MD 50-250/15	15	20	IE3	91,2	92,0	91,9	16,32	27,7	17,3	225,0	130,0
MD 50-250/18.5	18,5	25	IE3	91,6	93,0	92,6	19,98	35,0	20,3	328,0	190,0
MD 50-250/22	22	30	IE3	92,0	93,1	93,2	23,58	39,7	23,6	391,0	227,0

NOISE DATA

Pump type	Power		L _{pA} - dB(A) *
	[kW]	[HP]	
MD 32-250/5.5	5,5	7,5	75
MD 32-250/7.5	7,5	10	
MD 32-250/9.2	9,2	12,5	80
MD 32-250/11	11	15	
MD 40-250/11	11	15	80
MD 40-250/15	15	20	83-82
MD 50-250/15	15	20	83-82
MD 50-250/18,5	18,5	25	
MD 50-250/22	22	30	



EBARA Pumps Europe S.p.A.

Via Torri di Confine 2/1 int. C
36053 Gambellara (Vicenza), Italy
Phone +39 0444 706811
ebarapumps.epe@ebaracom
www.ebaraeurope.com

EBARA Pumps Europe S.p.A. GERMANY

Elisabeth-Selbert-Straße 2
63110 Rodgau, Germany
Phone +49 (0) 6106-660 99-0
info.epde@ebaracom

EBARA Pumps South Africa (PTY) LTD

26 Kyalami Boulevard,
Kyalami Business Park, 1684, Midrand,
Gauteng, South Africa
Phone +27 11 466 1844
ebaraeurope@ebaracom

EBARA Pumps Europe S.p.A. UK

Unit A, Park 34
Collett Way - Didcot
Oxfordshire - OX11 7WB, United Kingdom
Phone +44 1895 439027
marketing.epuk@ebaracom

EBARA Pumps Europe S.p.A. FRANCE

122, Rue Pasteur
69780 Toussieu, France
Phone: +33 04 72 76 94 82
mktg.epr@ebaracom

EBARA Pumps East Africa

Delta Corner Tower 2, 13th Floor, Office 1308,
Chiromo Road, Westlands
P.O. Box 13796-00800, Nairobi
Phone: +254(0)722913119
info.epea@ebaracom

EBARA POMPY POLSKA Sp. z o.o.

ul. Działkowa 115 A
02-234 Warszawa, Poland
Phone +48 22 3909920
marketing.epl@ebaracom

EBARA Pumps RUS Ltd.

Prospekt Andropov 18, building 7, floor 11
115432 Moscow
Phone +7 499 6830133
mktg.epr@ebaracom