

direct, without transducer



(1) Select valve's coil voltage /18 in case of electronic drivers not supplied by Atos, with power supply 24 VDC and with max current limited to 1A

(1) For **CART RZME** the electronic driver may interfere with the manifold surface.  
Please check the installation dimensions at section **15**

#### 4 GENERAL NOTES

Atos digital proportionals valves are CE marked according to the applicable directives (e.g. Immunity and Emission EMC Directive). Installation, wirings and start-up procedures must be performed according to the general prescriptions shown in tech table **FS900** and in the installation notes supply with relevant components.

#### 5 GENERAL CHARACTERISTICS

Assembly position	Any position
Subplate surface finishing to ISO 4401	Acceptable roughness index: $Ra \leq 0,8$ , recommended $Ra 0,4$ – Flatness ratio 0,01/100
MTTFd valves according to EN ISO 13849	150 years, see technical table P007
Ambient temperature range	<b>Standard</b> = $-20^{\circ}\text{C} \div +70^{\circ}\text{C}$ <b>/PE</b> option = $-20^{\circ}\text{C} \div +70^{\circ}\text{C}$ <b>/BT</b> option = $-40^{\circ}\text{C} \div +60^{\circ}\text{C}$
Storage temperature range	<b>Standard</b> = $-20^{\circ}\text{C} \div +80^{\circ}\text{C}$ <b>/PE</b> option = $-20^{\circ}\text{C} \div +80^{\circ}\text{C}$ <b>/BT</b> option = $-40^{\circ}\text{C} \div +70^{\circ}\text{C}$
Surface protection	Zinc coating with black passivation
Corrosion resistance	Salt spray test (EN ISO 9227) > 200 h
Conformity	CE according to EMC directive 2014/30/EU (Immunity: EN 61000-6-2; Emission: EN 61000-6-3) RoHS Directive 2011/65/EU as last update by 2015/863/EU REACH Regulation (EC) n°1907/2006

#### 6 HYDRAULIC CHARACTERISTICS

Valve model	<b>RZME-A-010</b>
Max regulated pressure	50; 100; 210; 315; 420;
Min. regulated pressure [bar]	see min. pressure / flow diagrams at section 9
Max. pressure at port P [bar]	420
Max. pressure at port T [bar]	210
Max. flow [l/min]	4
Response time 0-100% step signal <b>(1)</b> [ms] (depending on installation)	$\leq 70$
Hysteresis [% of the max pressure]	$\leq 3$
Linearity [% of the max pressure]	$\pm 3$
Repeatability [% of the max pressure]	$\leq 2$

**Note:** above performance data refer to valves coupled with Atos electronic drivers, see section 3

**(1)** Average response time values; the pressure variation in consequence of a modification of the reference input signal to the valve is affected by the stiffness of the hydraulic circuit: greater is the stiffness of the circuit, faster is the dynamic response

#### 7 ELECTRICAL CHARACTERISTICS

	<b>Standard</b> standard coil to be used with Atos drivers with power supply 24Vdc	option <b>/6</b> optional coil to be used with Atos drivers with power supply 12 Vdc	option <b>/18</b> optional coil to be used with elec- tronic drivers not supplied by Atos, with power supply 24 Vdc and max current limited to 1A
Coil voltage code			
Max. solenoid current	2,3 A	2,7 A	1,1 A
Coil resistance R at 20°C	3,1 $\Omega$	2,1 $\Omega$	13,1 $\Omega$
Insulation class	H (180°) Due to the occurring surface temperatures of the solenoid coils, the European standards ISO 13732-1 and EN982 must be taken into account		
Protection degree to DIN EN60529	<b>IP 65</b> (with connectors 666 correctly assembled)		
Duty factor	Continuous rating (ED=100%)		
Certification	<b>cURus</b> North American Standards		

#### 8 SEALS AND HYDRAULIC FLUIDS - for other fluids not included in below table, consult our technical office

Seals, recommended fluid temperature	NBR seals (standard) = $-20^{\circ}\text{C} \div +80^{\circ}\text{C}$ , with HFC hydraulic fluids = $-20^{\circ}\text{C} \div +50^{\circ}\text{C}$ FKM seals (/PE option) = $-20^{\circ}\text{C} \div +80^{\circ}\text{C}$ HNBR seals (/BT option) = $-40^{\circ}\text{C} \div +60^{\circ}\text{C}$ , with HFC hydraulic fluids = $-40^{\circ}\text{C} \div +50^{\circ}\text{C}$		
Recommended viscosity	20 $\div$ 100 mm <sup>2</sup> /s - max allowed range 15 $\div$ 380 mm <sup>2</sup> /s		
Max fluid contamination level	normal operation longer life	ISO4406 class 18/16/13    NAS1638 class 7 ISO4406 class 16/14/11    NAS1638 class 5	see also filter section at www.atos.com or KTF catalog
<b>Hydraulic fluid</b>	<b>Suitable seals type</b>	<b>Classification</b>	<b>Ref. Standard</b>
Mineral oils	NBR, FKM, HNBR	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDU, HFDR	ISO 12922
Flame resistant with water	NBR, HNBR	HFC	



## 9 DIAGRAMS (based on mineral oil ISO VG 46 at 50 °C)

**Regulation diagrams** - with flow rate  $Q = 1$  l/min

**1 =** regulation characteristic linearized with Atos digital divers  
E-MI-AS-IR, E-BM-AS, E-BM-AES using Atos E-SW-SETUP software


**2 =** regulation characteristic without linearization

**Note:** the presence of counter pressure at port T  
can affect the effective pressure regulation

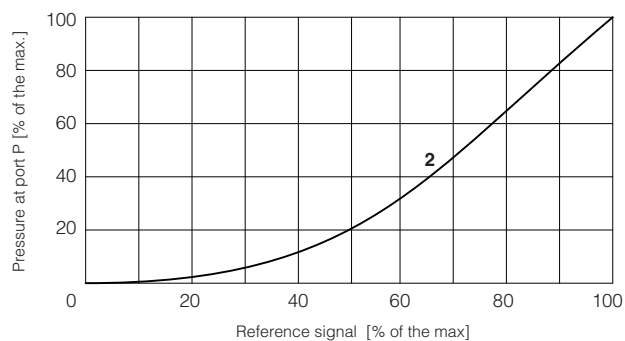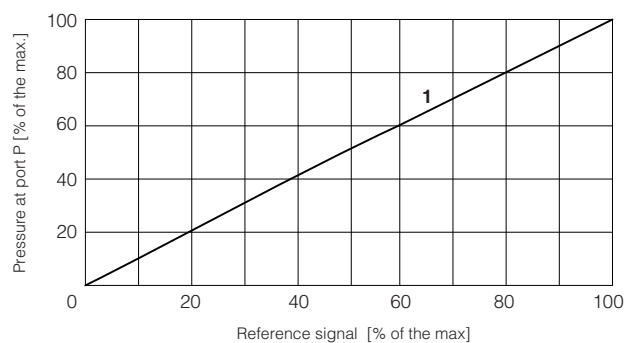

### 3 = Pressure/flow diagrams

with reference signal set at  $Q = 1$  l/min

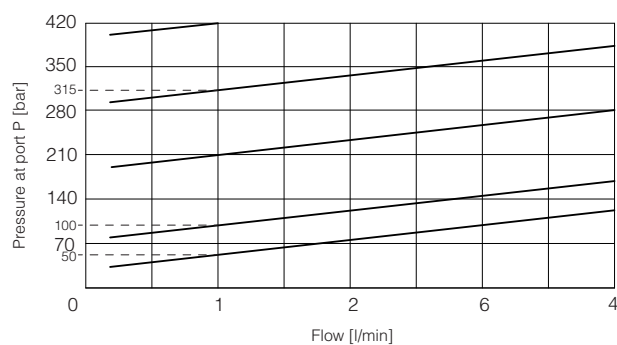

### 4-7 = Min. pressure/flow diagrams

with zero reference signal



**4 =** pressure range: 50

**5 =** pressure range: 100

**6 =** pressure range: 210

**7 =** pressure range: 315

**8 =** pressure range: 420

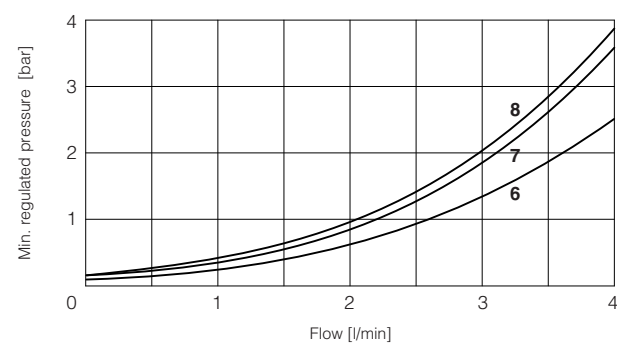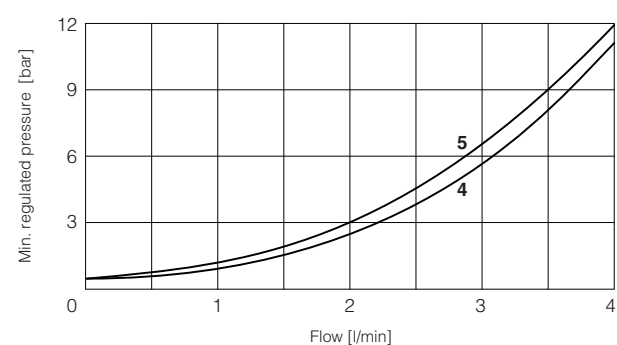

## 10 COIL VOLTAGE OPTIONS


**6** = Optional coil to be used with Atos drivers with power supply 12 Vdc.

**18** = Optional coil to be used with electronic drivers not supplied by Atos, with power supply 24 Vdc and with max current limited to 1A.

## 11 COILS WITH SPECIAL CONNECTORS


### J option

Coil type COZEJ  
AMP Junior Timer connector  
Protection degree IP67




### K option

Coil type COZEK  
Deutsch connector, DT-04-2P male  
Protection degree IP67




### S option

Coil type COZES  
Lead Wire connection  
Cable length = 180 mm




## 12 SOLENOID CONNECTION

PIN	SIGNAL	TECHNICAL SPECIFICATION	Connector code 666
1	COIL	Power supply	
2	COIL	Power supply	
3	GND	Ground	



## 13 FASTENING BOLTS AND SEALS FOR RZME



### Fastening bolts:

4 socket head screws M5x50 class 12.9

Tightening torque = 8 Nm



### Seals:

2 OR 108




Diameter of ports P, T: Ø 5 mm

14 INSTALLATION DIMENSIONS FOR RZME [mm]



ISO 4401: 2005

Mounting surface: 4401-03-02-0-05 (see table P005)  
(without ports A and B)



Mass [kg]	
RZME	1,5
RZME with E-MI-AS-IR	2,0

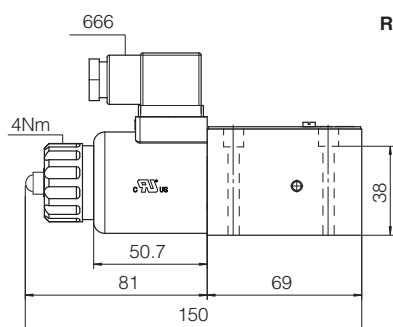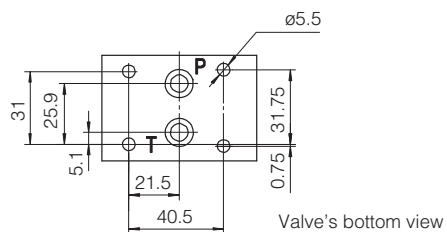

RZME-A  
(with digital driver E-MI-AS-IR)

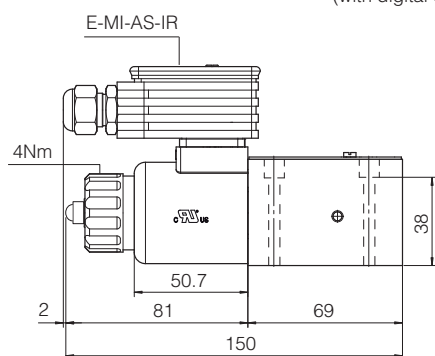

## 15



Mass [kg]	
CART RZME	0,6
CART RZME with E-MI-AS-IR	1,1

## 16

<b>FS001</b>	Basics for digital electrohydraulics	<b>GS050</b>	E-BM-AES digital driver
<b>FS900</b>	Operating and maintenance information for proportional valves	<b>GS500</b>	Programming tools
<b>G010</b>	E-MI-AC analog driver	<b>K800</b>	Electric and electronic connectors
<b>G020</b>	E-MI-AS-IR digital driver	<b>P005</b>	Mounting surfaces for electrohydraulic valves
<b>G030</b>	E-BM-AS digital driver		