

Portable Surface Roughness Tester Surftest SJ-210/310 Series



Portable Surface Roughness Tester

Surftest SJ-210/310 Series

Surftest SJ-210 Series

The Surftest SJ-210 is a user-friendly surface roughness measurement instrument designed as a handheld tool that can be carried with you and used on-site.



Refer to page 4 to 7 for details.

Surftest SJ-310 Series


The Surftest SJ-310 is a compact, portable, easy-to-use surface roughness measurement instrument equipped with extensive measurement and analysis features.



Refer to page 8 to 11 for details.

Enhanced power for making measurements on site

Charging is reduced approximately one quarter of the time compared with conventional models. The detector supports a variety of measurement orientations and can perform measurements up against a wall surface or while facing upward. When combined with optional accessories such as a height gage adapter, the detector can perform measurements in various orientations and settings.

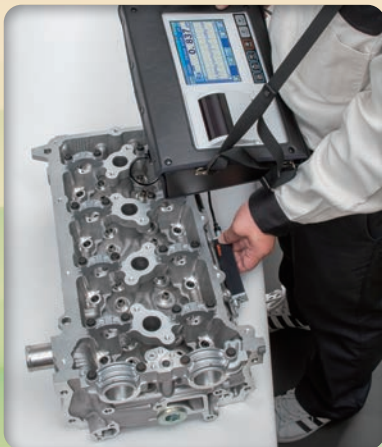


Surftest SJ-310 Series


User friendly, high-functionality display unit with integrated high-speed printer

The large 5.7-inch color graphic touch-screen LCD provides excellent readability. Furthermore, selecting icons from the touch panel display* provides intuitive and easy operation. The integrated high-speed printer offers the user the ability to perform the entire measuring and printing process with the push of a single button (START button). * Text display can also be selected.



High-speed printer



BAC and ADC curves can be printed in addition to calculation results (including pass/fail results) and assessed profiles. The printer offers an easy-to-understand layout and can also print horizontally to match the content displayed on the LCD. Furthermore, printing speed is approximately 50 % faster than conventional models.




5.7-inch color graphic LCD with touch screen

Measurement Result ↔ Measured profile
One-touch switching
BAC curve
ADC curve

Sheet buttons

Frequently used functions, such as the measurement start button, are provided as rugged sheet buttons with excellent durability.



Built-in battery

With drastically enhanced power compared to conventional models, the Surftest SJ-310 can make 1,500 continuous measurements on a full charge achieved in 4 hours.

Highly functional detectors and drive units


Detector supplied as standard



One of two types may be selected:

- Measuring force: 0.75 mN
Stylus tip: Tip radius 2 μm
Tip angle 60°
- Measuring force: 4 mN
Stylus tip: Tip radius 5 μm
Tip angle 90°

A wide range of optional detectors is available, including detectors for small holes, extra small holes, gear tooth surfaces, and deep grooves.



Drive units

- Standard drive unit
Popular standard drive unit



- Transverse tracing drive unit
Best suited for measurement of narrow, shrouded workpiece features such as crankshaft bearings, EDM parts, etc. (Patent Registered in Japan)




- Retractable drive unit
The detector is in the retracted position at rest so it is immune from damage when inserted into a feature whose shape cannot be easily seen, such as a blind hole, etc.



Links to a wide variety of external instruments


You can save parameter recalculations and measurement results in text format on a memory card and import into commercial spreadsheet software on a PC. You can also connect to a PC using the USB connector and use a dedicated software application to perform everything from measurement control and condition modification to issuing inspection result reports.

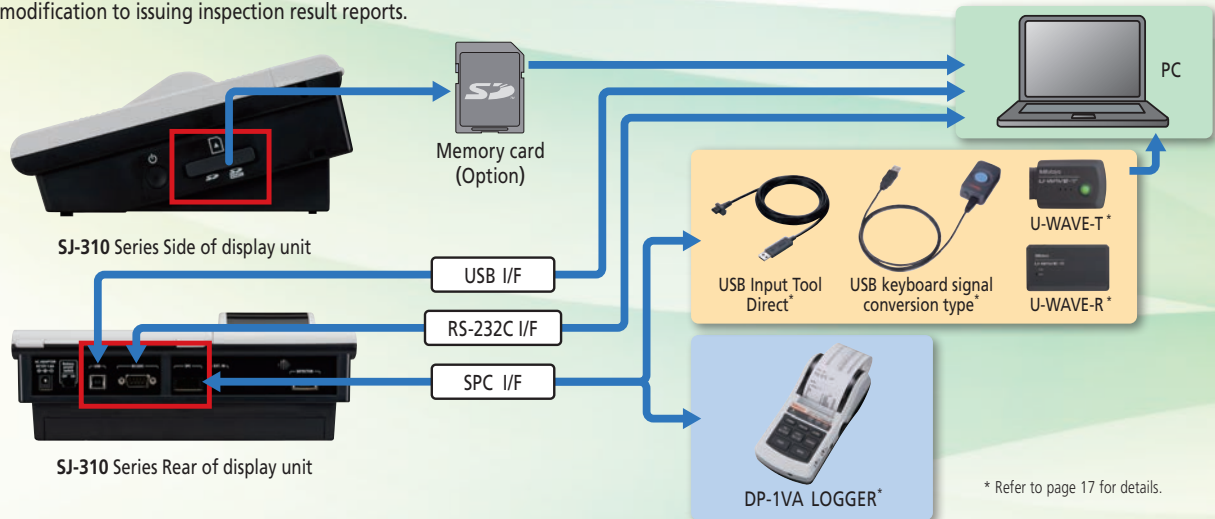


* Refer to page 17 for details.

Switches between icon and text display

The display can be switched between icon and text, providing easy, user-friendly operation. Additionally, the guidance feature provides detailed explanations of touch-screen buttons.

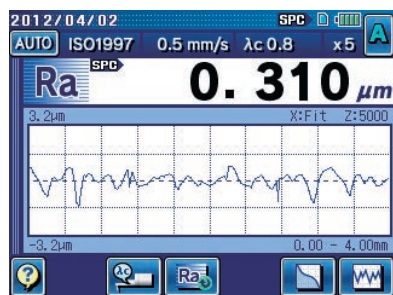

Icon


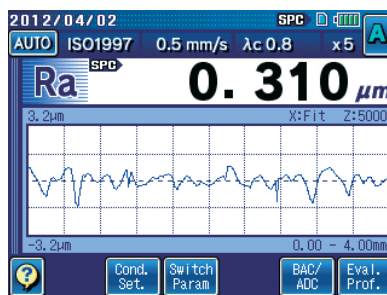


Text




Easy specification of assessment conditions from a list

Setting assessment conditions is simple because you can select the desired condition from a displayed list (e.g., standard, parameter).

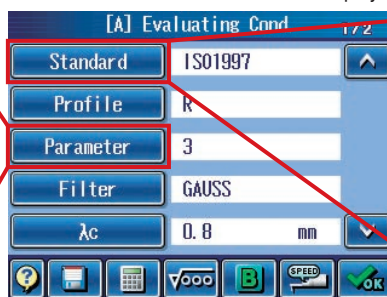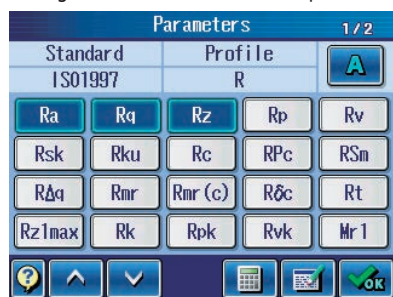


Zooming waveforms and analyzing coordinate differences

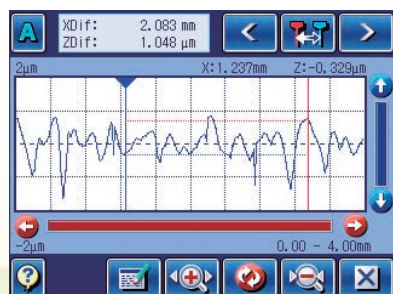

You can not only magnify or shrink waveforms, but also calculate the coordinate difference between two points using a ruler operation. You can quickly check the irregularity status without waiting for a printout.

Deleting unnecessary data

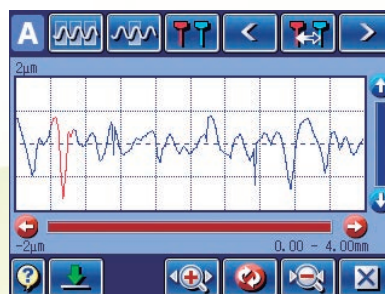


With the Surftest SJ-310, you can delete portions of measurement data. This feature allows you to make new calculations by deleting data that should not be included in parameter calculation, such as data on a scratch.

Displaying GO/NG judgment results


By specifying a tolerance in advance, you can display pass/fail results in color.



OK

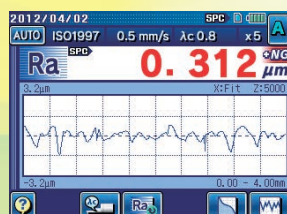

+NG

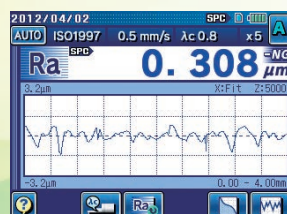


-NG

Surface texture symbol entry

You can enter assessment conditions using ISO/JIS surface texture symbols.




(Patent registered in Japan, U.S.A., Germany, UK, France)
(Patent pending in China)

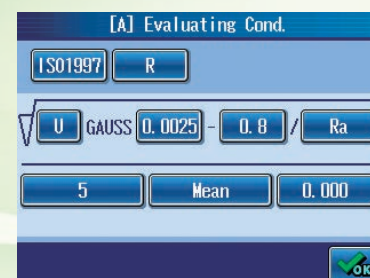

SJ-310 Series



Measurement results can be displayed in several ways

Measurement results can be presented in the form of a 1-parameter, profile, 4-parameter or trace display.

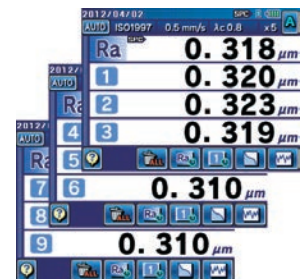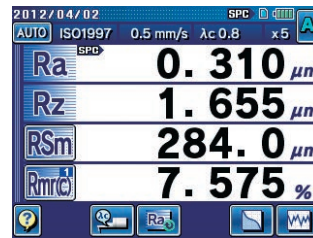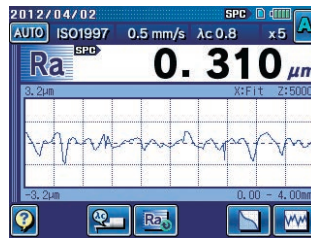



Recalculation function

After completing measurement, you can modify the assessment conditions (standard, profile, and parameter) and easily recalculate the results using the new condition.* * Not possible with all measurement conditions.

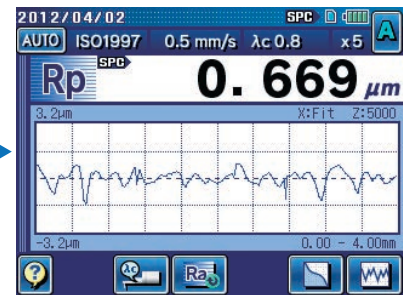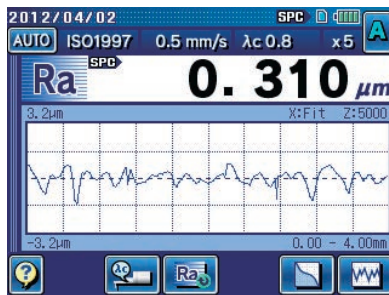


Dual assessment of a single measurement

Using the result of a single measurement, you can make calculations or analyze assessment profiles under two different assessment conditions (standard, profile, filter, etc.) without using the recalculation feature.

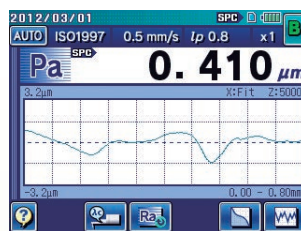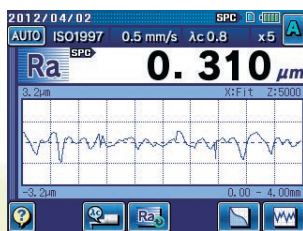


Stylus alarm function

An alarm warns you when the cumulative measurement distance exceeds a preset limit. This feature can be used to prevent problems that would be caused by worn out styli. Any value can be specified as the limit.

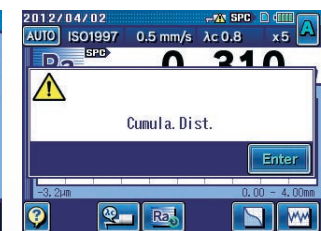



Positive stylus contact indication

Stylus contact with the workpiece is indicated by color coding in the display. This is helpful when visibility of the surface to be measured is restricted (e.g. when measuring within a shrouded feature or groove).

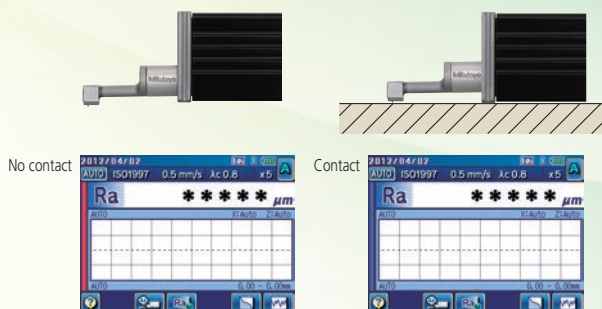

Extensive statistical processing features

You can make a maximum of 300 statistical measurements using up to three parameters to obtain averages, standard deviations, maximums, minimums, passing rates, and histograms (upper and lower limits can be displayed). This feature is ideal for day-to-day data management.

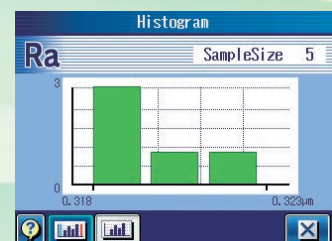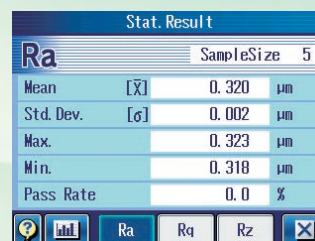

SJ-310 Series Specifications

Specifications

Type of detector	Standard drive unit type		Retractable drive unit type		Transverse tracing drive unit type		
Model No.	SJ-310 (0.75 mN type)	SJ-310 (4 mN type)	SJ-310 (0.75 mN type)	SJ-310 (4 mN type)	SJ-310 (0.75 mN type)	SJ-310 (4 mN type)	
	inch/mm	178-571-11A	178-571-12A	178-573-11A	178-573-12A	178-575-11A	178-575-12A
X axis		.63" (16.0mm)				.22" (5.6 mm)	
Measuring range	Detector	Range					14400 μin (-7900 μin to +6300 μin) [360 μm (-200 μm to +160 μm)]
		Range/resolution					14400 μin / .8 μin (360 μm / 0.02 μm) 4000 μin / .2 μin (100 μm / 0.006 μm) 1000 μin / .08 μin (25 μm / 0.002 μm)
Measuring speed		When measuring: 0.01, 0.02, 0.03 in/s (0.25mm/s, 0.5mm/s, 0.75mm/s), When returning: .04 in/s (1mm/s)					
Measuring force/Stylus tip		0.75 mN/2 μmR 60°, 4 mN/5 μmR 90°					
Skid force		400 mN or less					
Applicable standards		JIS '82/JIS '94/JIS '01/ISO '97/ANSI/VDA					
Assessed profiles		Primary, Roughness, DF, R-Motif, W-Motif					
Parameters		Ra, Rc, Ry, Rz, Rq, Rt, Rmax ^{*1} , Rp, Rv, R3z, Rsk, Rku, Rc, RPl, Rsm, Rz1max ^{*2} , S, HSC, RzJIS ^{*3} , Rppi, RΔa, RΔq, Rlr, Rmr, Rmr(c), Rδc, Rk, Rpk, Rvk, Mr1, Mr2, A1, A2, Vo, λa, λq, Lo, Rpm, tp ^{*4} , Htp ^{*4} , R, Rx, AR, W, AW, Wx, Wte, Possible Customize					
Graph analysis		Bearing area curve/Amplitude distribution curve					
Filters		Gaussian, 2CR75, PC75					
Cut-off length	λc	.003, .01, .03, .1, .3" (0.08, 0.25, 0.8, 2.5, 8 mm)					
	λs ^{*5}	100, 320 μin (2.5, 8 μm)					
Sampling length		.003, .01, .03, .1, .3" (0.08, 0.25, 0.8, 2.5, 8 mm)					
Number of sampling lengths		x1, x2, x3, x4, x5, x6, x7, x8, x9, x10, Arbitrary 0.01~.63" (.0001" interval) [(0.3~16.0mm: 0.01mm interval)]				x1, x2, x3, x4, x5, x6, x7, x8, x9, x10, Arbitrary .0118 ~ .22"(.0001" Interval) [(0.3 ~ 5.6mm: 0.01mm Interval)]	
LCD dimensions		4.64" x 3.47" (117.8 x 88.2 mm)					
Display languages		Japanese, English, German, French, Italian, Spanish, Portuguese, Korean, Traditional Chinese, Simplified Chinese, Czech, Polish, Hungarian, Turkish, Swedish, Dutch					
Measurement result display		1-parameter display: one parameter measurement result 4-parameter display: four parameter measurement results Profile display: one parameter measurement result and the measured profile Trace display: The ten latest measurement results using the same parameter					
Printing function		Measurement conditions/Calculation results/GO/NG judgement result/Calculation results for each sampling length/ Tolerance value/Assessed profile/Graphic curve/Bearing area curve/Amplitude distribution curve/Environmental setting information					
External I/O		USB I/F, Digimatic output, RS-232C I/F, External SW I/F					
Functions	Customization	Desired parameters can be selected for calculation and display					
	GO/NG judgement ^{*6}	Max rule/16 % rule/Average rule/Standard deviation (1σ, 2σ, 3σ)					
	Storage of measurement condition	Save the condition at power OFF					
	Storage	Internal memory: Measurement condition (10 sets) Memory card (option): 500 measurement conditions, 10000 measuring data, 10000 text data, 500 statistic data, 1 backup of machine setting, the last ten traces (Trace 10)					
	Calibration	Auto-calibration with the entry of numerical value/Average calibration with multiple measurement (MAX.12 times) is available					
Power-saving function		Auto-sleep function (30-600 sec) ^{*7}					
Power supply		Two-way power supply: battery (rechargeable Ni-MH battery) and AC adapter Note 1: Charging time: about 4 hours (may vary due to ambient temperature) Note 2: Endurance: about 1500 measurements (differs slightly due to use conditions/environment)					
Size (WxDxH)	Display unit	10.8" x 4.3" x 7.8" (275 x 109 x 198 mm)					
	Drive unit	4.5"x 0.9" x 8.9" (115 x 23 x 26.7 mm)					
Mass		About 3.9 lbs. (1.8 kg) (Display unit + Drive unit + Standard detector)					
Standard accessories	12AAW066 Connecting cable ^{*8}					12AAW066 Connecting cable ^{*8}	
	178-601 Roughness reference specimen (Ra3 μm)					178-606 Roughness reference specimen (Ra1 μm)	
	357651 AC adapter					357651 AC adapter	
	12AAA217 Nosepiece for plane surface					12AAE643 Point-contact adapter	
	12AAA218 Nosepiece for cylinder					12AAE644 V-type adapter	
	12AAA216 Supporting leg					12BAK700 Calibration stage	
	12BAK700 Calibration stage					12BAG834 Stylus pen	
	12BAG834 Stylus pen					12BAL402 Protection sheet	
	12BAL402 Protection sheet					270732 Printer paper (5 pieces)	
	270732 Printer paper (5 pieces)					12BAL400 Carrying case	
	12BAL400 Carrying case					Philips screwdriver, Strap for stylus pen, Operation manual, Quick reference manual, Warranty	
	Philips screwdriver, Strap for stylus pen, Operation manual, Quick reference manual, Warranty					Philips screwdriver, Strap for stylus pen, Operation manual, Quick reference manual, Warranty	

*1 Only for VDA/ANSI/JIS '82 standards. *2 Only for ISO '97 standard. *3 Only for JIS '01 standard. *4 Only for ANSI standard. *5 Not available for JIS '82 standard.

*6 Standard deviation only can be selected in ANSI. 16% rule cannot be selected in VDA. *7 Auto-sleep function is invalid when AC adapter is used.


*8 For connecting the calculation display unit and drive unit.

Note: To denote your AC line voltage add the following suffixes (e.g. **178-570-11A**). A for 120 V, C for 100 V, D for 230 V, E for 230 V (for UK), DC for 220 V (for China), K for 220 V (for Korea)

SJ-310 Series Display unit

Unit: mm

25.4mm = 1"

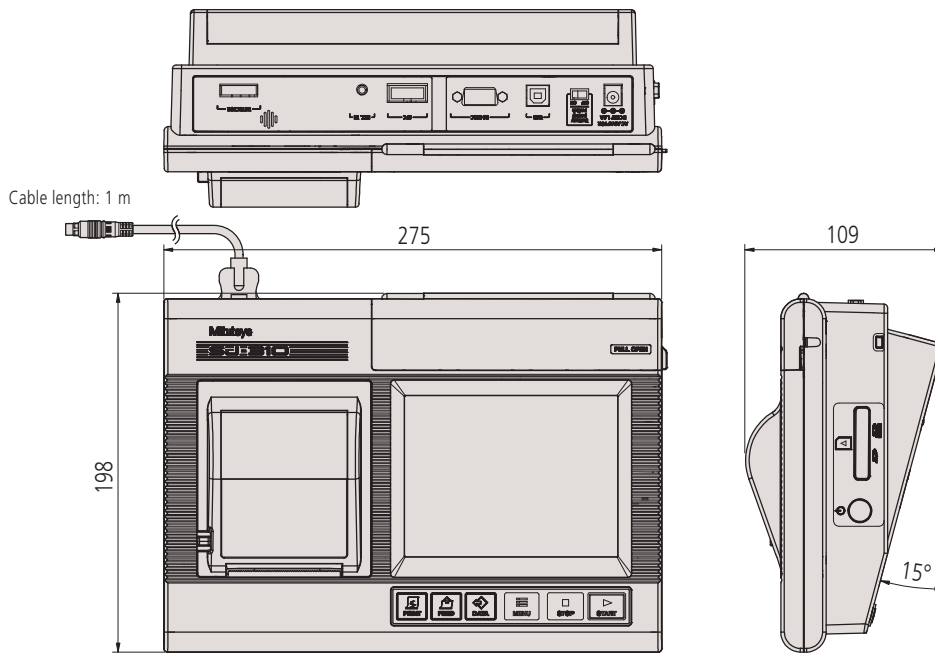

Drive unit

Unit: mm

25.4mm = 1"

Drive unit type	Drive unit external view*
Standard drive unit	<p>Technical drawing of the Standard drive unit. The front view shows a width of 115.0 mm and a height of 23.0 mm. The side view shows a depth of 26.0 mm and a 15° tilt. The top view shows a width of 25.2 mm and a depth of 26.7 mm.</p>
Retractable drive unit	<p>Technical drawing of the Retractable drive unit. The front view shows a width of 115.0 mm and a height of 23.0 mm. The side view shows a depth of 26.0 mm and a 15° tilt. The top view shows a width of 23.2 mm and a depth of 26.7 mm.</p>
Transverse tracing drive unit	<p>Technical drawing of the Transverse tracing drive unit. The front view shows a width of 115.0 mm and a height of 23.0 mm. The side view shows a depth of 26.0 mm and a 15° tilt. The top view shows a width of 45.5 mm and a depth of 47 mm.</p>

* External dimension for the models with standard detector conforms to each drive unit.


Dimensions

Detectors

Unit: mm

25.4mm = 1"


Standard detectors

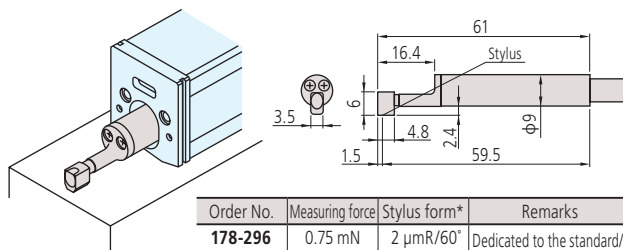

Order No.	Measuring force	Stylus form*	Remarks
178-296	0.75 mN	2 μ mR/60°	Dedicated to the standard/retractable drive unit
178-390	4 mN	5 μ mR/90°	
178-387	0.75 mN	2 μ mR/60°	Dedicated to the transverse tracing drive unit
178-386	4 mN	5 μ mR/90°	
178-391	4 mN	10 μ mR/90°	Dedicated to the standard/retractable drive unit

* Tip radius/Tip angle


Gear-tooth surface detectors

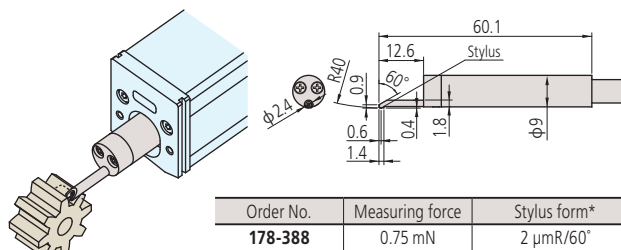

Order No.	Measuring force	Stylus form*
178-388	0.75 mN	2 μ mR/60°
178-398	4 mN	5 μ mR/60°

* Tip radius/Tip angle


Small hole detectors

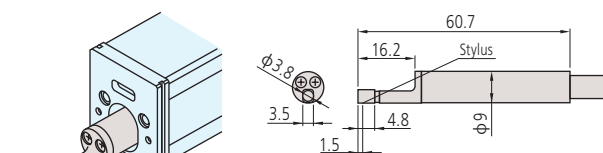

Order No.	Measuring force	Stylus form*	Remarks
178-383	0.75 mN	2 μ mR/60°	Minimum measurable hole diameter: ϕ 4.5 mm
178-392	4 mN	5 μ mR/90°	

* Tip radius/Tip angle


Deep groove detectors

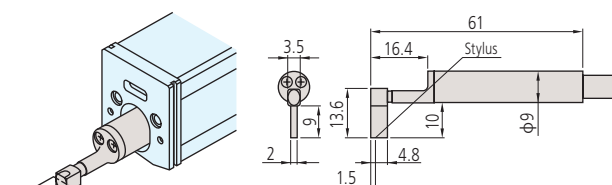

Order No.	Measuring force	Stylus form*	Remarks
178-385	0.75 mN	2 μ mR/60°	Not available for the transverse tracing drive unit
178-394	4 mN	5 μ mR/90°	

* Tip radius/Tip angle


Extra small hole detectors

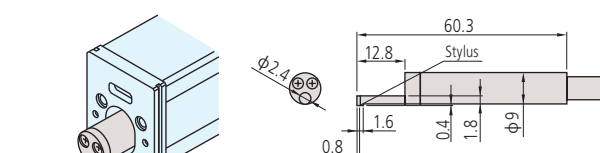

Order No.	Measuring force	Stylus form*	Remarks
178-384	0.75 mN	2 μ mR/60°	Minimum measurable hole diameter: ϕ 2.8 mm
178-393	4 mN	5 μ mR/90°	

* Tip radius/Tip angle


How to identify the stylus tip radius



Nose mounting screw (2 pcs.)
Black : 2 μ m
White : 5 μ m
Yellow: 10 μ m

Custom-made for special order

Any specified detector other than above listed can be custom-made for special order.
Please consult your local Mitutoyo sales office.

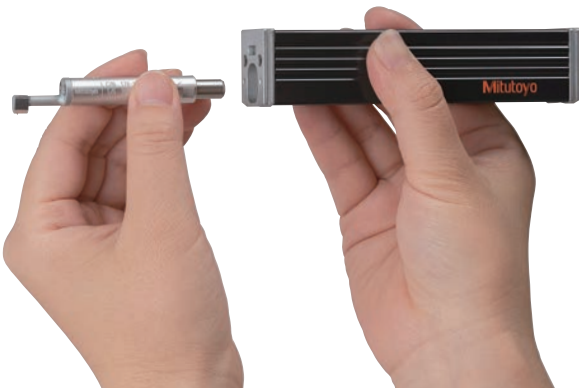


Optional accessories for SJ-210/310 Series

Drive unit accessories

Nosepiece for flat surfaces


12AAA217



Note 1: Standard accessory for the standard/ retractable drive unit of the **SJ-310** Series
 Note 2: Not available for the transverse tracing drive unit.

Nosepiece for cylindrical surfaces

12AAA218

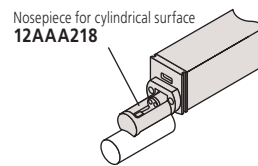


Note 1: Standard accessory for the standard/ retractable drive unit of the **SJ-310** Series
 Note 2: Not available for the transverse tracing drive unit.

V-type adapter

12AAE644


Note 1: Transverse tracing type standard accessory.
 Note 2: Dedicated to the transverse tracing drive unit.



Point-contact adapter

12AAE643

Note 1: Transverse tracing type standard accessory.
 Note 2: Dedicated to the transverse tracing drive unit.




Extension rod (50 mm)

Note: Only one rod can be used.

12AAA210

Note: Not available for the transverse tracing drive unit.

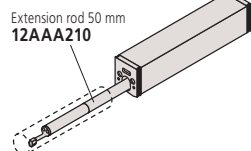

Extension cable (1 m)


Note: Only one rod can be used.

12BAA303

Note: For connecting calculation display unit and drive unit.

Support feet set

12AAA216




Note 1: Standard accessory for the standard/ retractable drive unit of the **SJ-310** Series
 Note 2: Not attachable to the detector side of the transverse tracing drive unit.

Vertical positioning adapter

12AAA219

Note: Not available for the transverse tracing drive unit.




Magnetic stand adapter

12AAA221

(Mounting spigot diameter is 8 mm)

12AAA220


(Mounting spigot diameter is 9.5 mm)



Height gage adapter

12AAA222 (9 x 9mm)

12AAA233 (1/4 x 1/2")



Optional accessories for SJ-210/310 Series

Setting attachments

Note: Not available for the transverse tracing drive unit


Enhances measurement efficiency by facilitating the measurement setup of multiple workpieces of the same type and of the hard-to-access sections of a workpiece.

Setting attachment: V type for measuring in the cylinder axis direction

The V-width is adjustable to the cylinder diameter facilitating axial measurement of a wide range of cylinder diameters.

- Adjustable range: $\phi 5$ - $\phi 150$ mm


178-033

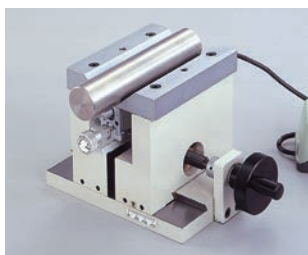

Setting attachment: Slider type

This attachment is ideal for measuring a flat area of a workpiece that has an indentation or step that makes it difficult to attach the drive unit.

178-034

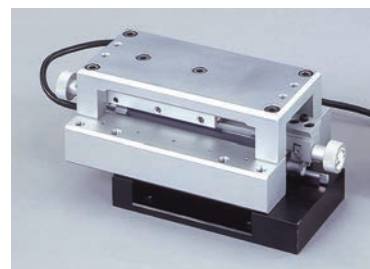

Setting attachment: Inside diameter type

Greatly facilitates measurement of internal wall surfaces of, for example, a cylinder block.

- Applicable diameter: $\phi 75$ - $\phi 95$ mm
- Accessible depth: 30 - 135 mm

178-035



• Custom-made for special order

Any specified attachment other than above listed can be custom-made for special order.
Please consult your local Mitutoyo sales office.
Example: measurements for crankshaft, cylinder-block bores

Calculation results input unit INPUT TOOL

This unit allows you to load Surftest **SJ-210/310** Series calculation results (SPC output) into commercial spreadsheet software on a PC via a USB connector. You can essentially use a one-touch operation to enter the calculation results (values) into the cells in the spreadsheet software.



USB Input Tool-Direct
USB-ITN-D
06AFM380D



USB Input Tool
USB keyboard signal conversion type*
IT-016U
264-016-10
* Requires the optional connection cable.
1 m: **936937**
2 m: **965014**

Digimatic mini processor DP-1VA LOGGER

By connecting this printer to the Surftest **SJ-210/310** Series' digimatic output, you can print* calculation results, perform a variety of statistical analysis, draw a histogram or D chart, and also perform complicated operations for X-R control charts.

* The symbol ' μm ' is not printable, but measurement results can still be printed out without setting the measurement unit.



264-505A

- **SJ-210/310** Series → **DP-1VA** **LOGGER** Connecting cable
1 m: **936937**
2 m: **965014**

Roughness specimen W



Display: R_a = Approx. $3\ \mu\text{m}$,
Approx. $0.4\ \mu\text{m}$

178-604

Note: R_a = Approx. $0.4\ \mu\text{m}$ can only be used for stylus tip checking.

Measurement Data Wireless Communication System U-WAVE

This unit allows you to remotely load Surftest **SJ-210/310** Series calculation results (SPC output) into commercial spreadsheet software on a PC.

You can essentially use a one-touch operation to enter the calculation results (values) into the cells in the spreadsheet software.



U-WAVE-R
(Connects to the PC)
02AZD810D



U-WAVE-T*
(Connects to the **SJ-210/310** Series)
02AZD880G
* Requires the optional connection cable.
02AZD790D



Example of the connection with **SJ-210**

Foot switch

A foot switch is used to trigger measurement. This tool is very useful in cases where you need to measure the same workpiece multiple times using jigs and other fixtures.



12AAJ088

Memory card (2GB / 8GB)




12AAW452 / 64PMI244

Note 1: micro SD card (with a conversion adapter to SD card)

Note 2: Not all memory cards can be recognized. Please use the optional SD memory card.

The Surftest **SJ-210/310** Series has a USB interface, enabling setting up measurement conditions and starting the measurement via PC. We also provide a program that allows you to create inspection record tables using a Microsoft Excel* macro.

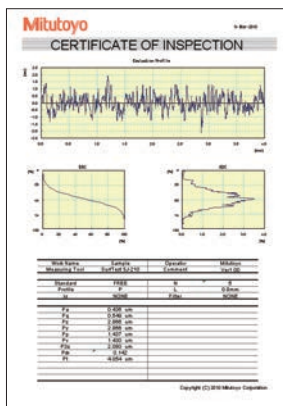


- OS: Windows 7
Windows 8
Windows 10
- Spreadsheet software:
Microsoft Excel 2010
Microsoft Excel 2013
Microsoft Excel 2016

The optional USB cable is also required.


- USB cable for **SJ-210 Series** (2 m)
12AAL068
- USB cable for **SJ-310 Series**
12AAD510

Note: USB Communication cable (commercial item: Equivalent to A and mini-B type for device-host A)

More advanced analysis can be performed by loading **SJ-210/310** Series measurement data to software program **FORMTRACEPAK-AP** via a memory card (option) for processing back at base.

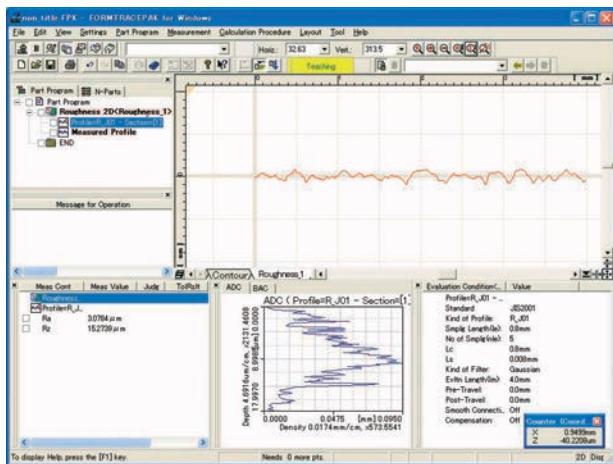

Refer to the **FORMTRACEPAK**
Bulletin No. 2010(2) for more details.

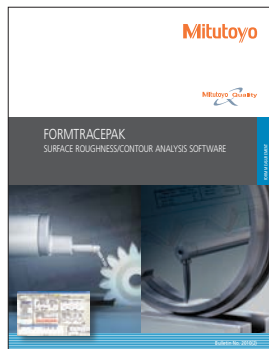

Optional Accessories

For SJ-210 Series

• Printer for SJ-210

Assessed profiles, calculation results and curves can be printed out by connecting the **SJ-210**-dedicated printer, which is palm sized (WxDxH: 93×125×70 mm) and can run on an internal battery.


- Power supply can be selected. (AC adapter or battery pack)
- Printable items: Measurement conditions, calculation results, assessed profile, bearing area curve (BAC), amplitude distribution curve (ADC), and environment settings.




178-421A

Unit configuration:

- 1) Printer main unit 1 unit
- 2) Printer connecting cable (For the connection to the **SJ-210**)
- 3) Printing paper 6 rolls
- 4) Battery pack 1 piece
- 5) Exclusive use AC adaptor (with AC power cord) 1 piece

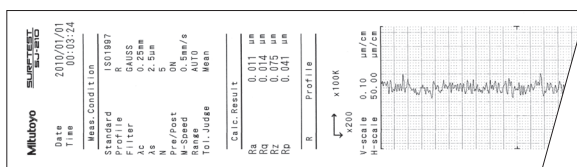

Example of the output by the printer

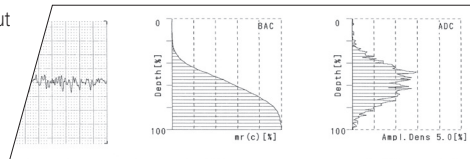

Printer supplies:

- Printing paper standard type (5 rolls) **270732**
Durable printer paper (5 rolls) **12AAA876**

• Optional accessories and consumables for SJ-210

- Protective sheet for the color LCD (5-sheet set) **12AAL066**
Connecting cable (for **SJ-210** Series) **12AAL067**

For SJ-310 Series

• Optional accessories and consumables for SJ-310

- Printer paper standard type (5 rolls) **270732**
Durable printer paper (5 rolls) **12AAA876**
Touch-screen protector sheet (10 sheets) **12AAN040**
Connecting cable (for **SJ-310** Series) **12AAA882**



Whatever your challenges are, Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.



Find additional product literature and our product catalog

Note: All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this printed matter as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. In addition, the latest applicable version of our General Trading Conditions will apply. Only quotations submitted by ourselves may be regarded as definitive. Specifications are subject to change without notice.

Mitutoyo products are subject to US Export Administration Regulations (EAR). Re-export or relocation of our products may require prior approval by an appropriate governing authority.

Trademarks and Registrations

Designations used by companies to distinguish their products are often claimed as trademarks. In all instances where Mitutoyo America Corporation is aware of a claim, the product names appear in initial capital or all capital letters. The appropriate companies should be contacted for more complete trademark and registration information.

Mitutoyo

M³ Solution Centers:

Aurora, Illinois (Headquarters)
 Boston, Massachusetts
 Charlotte, North Carolina
 Cincinnati, Ohio
 Detroit, Michigan
 Los Angeles, California
 Seattle, Washington
 Houston, Texas