


Vernier Caliper

SERIES 531 — with Thumb Clamp

FEATURES

- The slider moves only when the spindle loaded thumb clamp is depressed.
- Can measure OD, ID, depth, and steps.

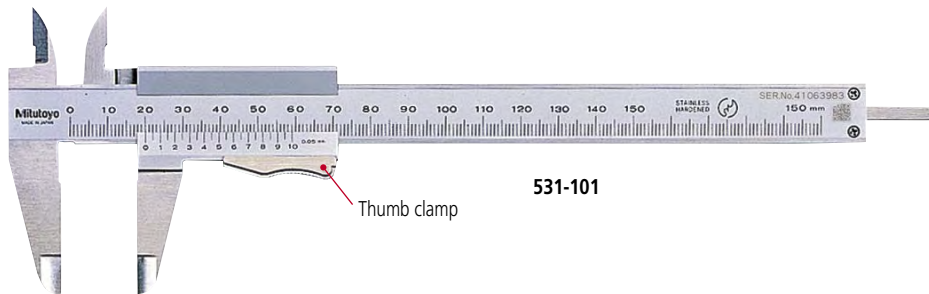

Technical Data

Accuracy: Refer to the list of specifications.
 Graduation: 0.05mm, 0.05mm (1/128") or .001" (1/128")
 High accuracy type:
 0.02mm or 0.02mm (.001")

SPECIFICATIONS

Metric					
Range	Order No.	Accuracy	Remarks (depth measuring bar / Second scale graduation / Others)		
0 - 150mm	531-101	±0.05mm	Blade	—	—
0 - 150mm	531-140*	±0.03mm	Blade	—	High accuracy model
0 - 200mm	531-102	±0.05mm	Blade	—	—
0 - 200mm	531-141*	±0.03mm	Blade	—	High accuracy model
0 - 300mm	531-103	±0.08mm	Blade	—	—
0 - 300mm	531-142*	±0.04mm	Blade	—	High accuracy model

*Graduation: 0.02mm

Metric/Inch with metric/inch double scale					
Range	Order No.	Accuracy	Remarks (depth measuring bar / Second scale graduation / Others)		
0 - 150mm	531-107	±0.05mm	Blade	1/128"	—
0 - 150mm	531-122	±0.05mm	Blade	1/128"	with inch/mm conversion label
0 - 150mm	531-128*	±0.03mm	Blade	.001"	High accuracy model
0 - 200mm	531-108	±0.05mm	Blade	1/128"	—
0 - 200mm	531-129*	±0.03mm	Blade	.001"	High accuracy model
0 - 300mm	531-109	±0.08mm	Blade	1/128"	—
0 - 300mm	531-112*	±0.04mm	Blade	.001"	High accuracy model

*Graduation: 0.02mm

inch with inch/inch double scale					
Range	Order No.	Accuracy	Remarks (depth measuring bar / Second scale graduation / Others)		
0 - 6"	531-113	±.0015"	Blade	1/128"	—
0 - 8"	531-114	±.0015"	Blade	1/128"	—

DIMENSION

