



Product designation
Product type designation
Motor type

Soft Starter
ADXL
Asynchronous
three phase

Electrical features

Supplies voltage

	Type of system		Three phase
	Rated supply voltage	V	208...600VAC
	auxiliary supply voltage (Us)		100...240VAC
	Rated frequency	Hz	50/60
Rated starter current Ie		A	75
Rated motor power	IEC ratings (T≤40°C)		
	230VAC	kW	22
	400VAC	kW	37
	500VAC	KW	45
	UL ratings (T≤40°C)		
	220-240VAC	HP	25
	380-415VAC	HP	40
	440-480VAC	HP	50
	550-600VAC	HP	60
Number of controlled phases		Nr.	2
Built-in bypass			Yes
Cooling System			Natural or forced (optional)
Rated insulation voltage Ui		V	600
Programming interface			
Display			Backlit icon LCD display
Programming with NFC technology			Yes
Optical port			Yes
Startup and stop settings			
Startup method			Torque ramp with current limit, Voltage ramp with current limit, Constant torque with current limit
Stop method			Torque ramp, voltage ramp, free-wheel stop
Protections			
Auxiliary supply protection			Voltage too low


Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage
Motor protection	Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run), overtemperature, starting too long
Starter protection	Overcurrent, overtemperature, bypass failure, phase shorted, temperature sensor fault, cooling fan fault, maintenance request

Functions	
Built-in bypass	Yes
Built-in display and keypad	Yes
Languages	6
View measurements	Yes
Torque control	Yes
Adjustable current limit	Yes
Dynamic braking	Yes
Kick Start function	No
Motor overload electronic protection	Yes
Motor protection PTC input	Yes
Protection against phase loss	Yes
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	Yes
Protection against low load	Yes
Programmable alarm	Yes
Digital inputs	3
Analog inputs	0
Digital outputs	3
Analog output	0
Optical port for programming	Yes
Event log	Yes
Motor hour counter	Yes
Startup counter	Yes

Clock calendar				Yes
Remote external keypad				No
Input and Output				
Digital inputs				
	Number of digital input	Nr.	3	
	Digital input type		2 input with dry contact + 1 input with dry contact or PTC (configurable)	
	Digital input functions		Programmable (motor start, motor stop, freewheel stop, motor preheating, commands lock, alarms inhibition, thermal status reset, keyboard lock, motor selection, user alarm, command)	
Digital outputs				
	Number of digital output	Nr.	3	
	Digital output arrangement		2 x 1 NO (SPST) + 1 C/O (SPDT) Ratings: 2 x 1NO contacts: 3A 250VAC - 3A 30VDC 1 x C/O contact: NO contact 5A 250VAC - 5A 30VDC; NC contact 3A 250VAC - 3A 30VDC	
	Digital output functions		Programmable (line contactor, run, global alarm, limits, remote variable, alarm Axx, user alarm Axx, OFF)	
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-20
		max	°C	+60°C (with current derating >40°C of 0.5%/°C)
	Storage temperature			
		min	°C	-30
		max	°C	+80

Max altitude	m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity	%	<80%
Pollution degree		2
Installation category		III
Housing		
Mounting		Screw-fixing or 35mm DIN rail with optional accessory EXP8003
IP degree of protection		IP00
Dimensions (W x H x D)	mm	95 x 226 x 182
Weight	Kg	2.9

Dimensions

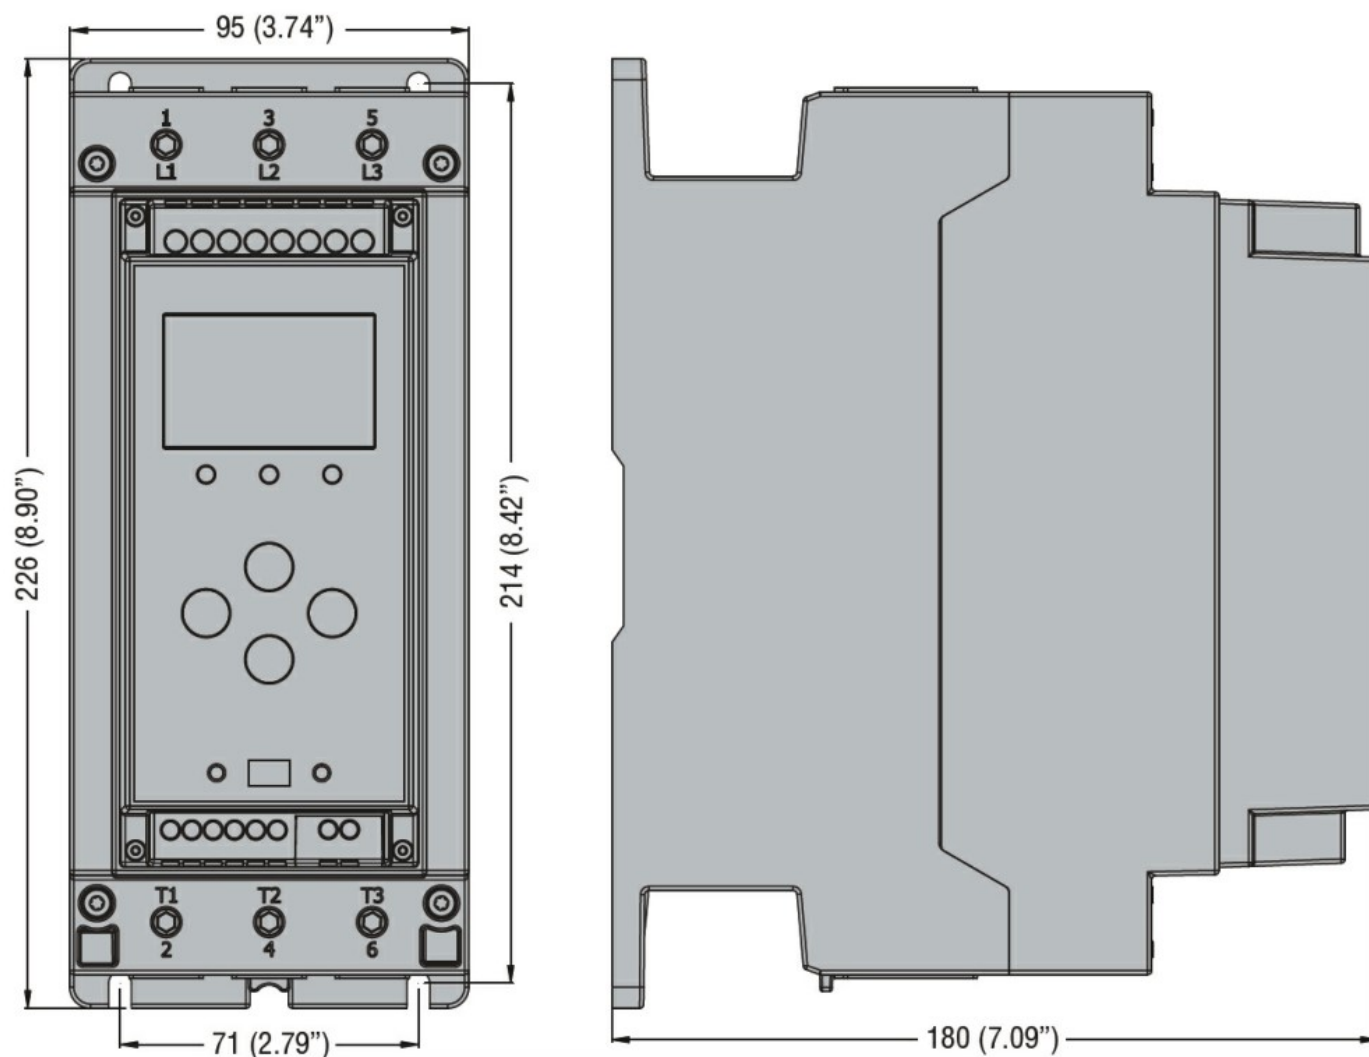

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-4-2
UL508

Certificates

cULus

EAC

RCM

ETIM classification

ETIM 8.0

EC000640 - Soft
starter